



IP COLOURNIGHT

How to adjust the brightness of the LED light on an IP ColourNight Camera.



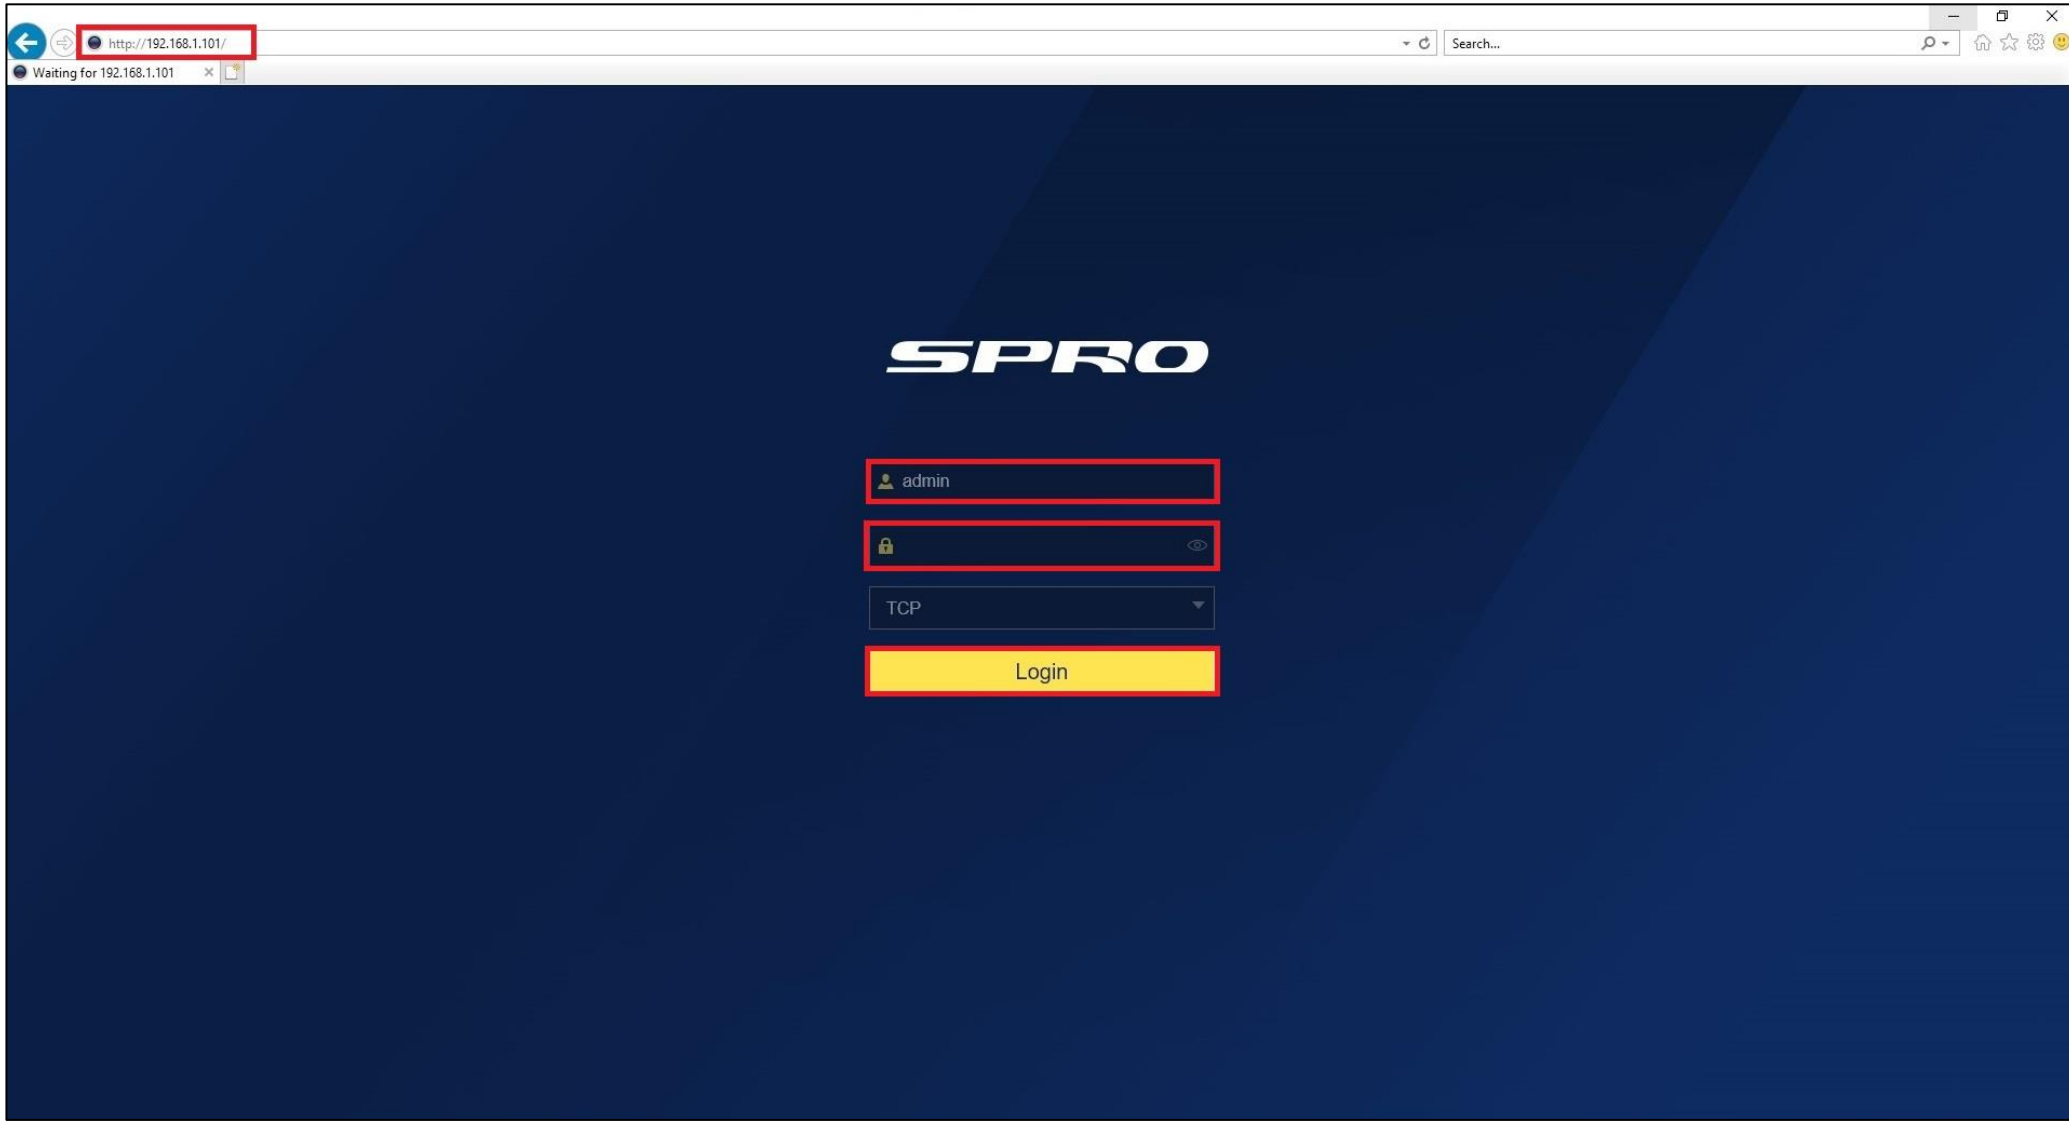

1, Type the **IP ADDRESS** of your NVR into Internet Explorer and press the return / enter key on your keyboard. Enter in your **USERNAME** and **PASSWORD** and press the **LOGIN** button

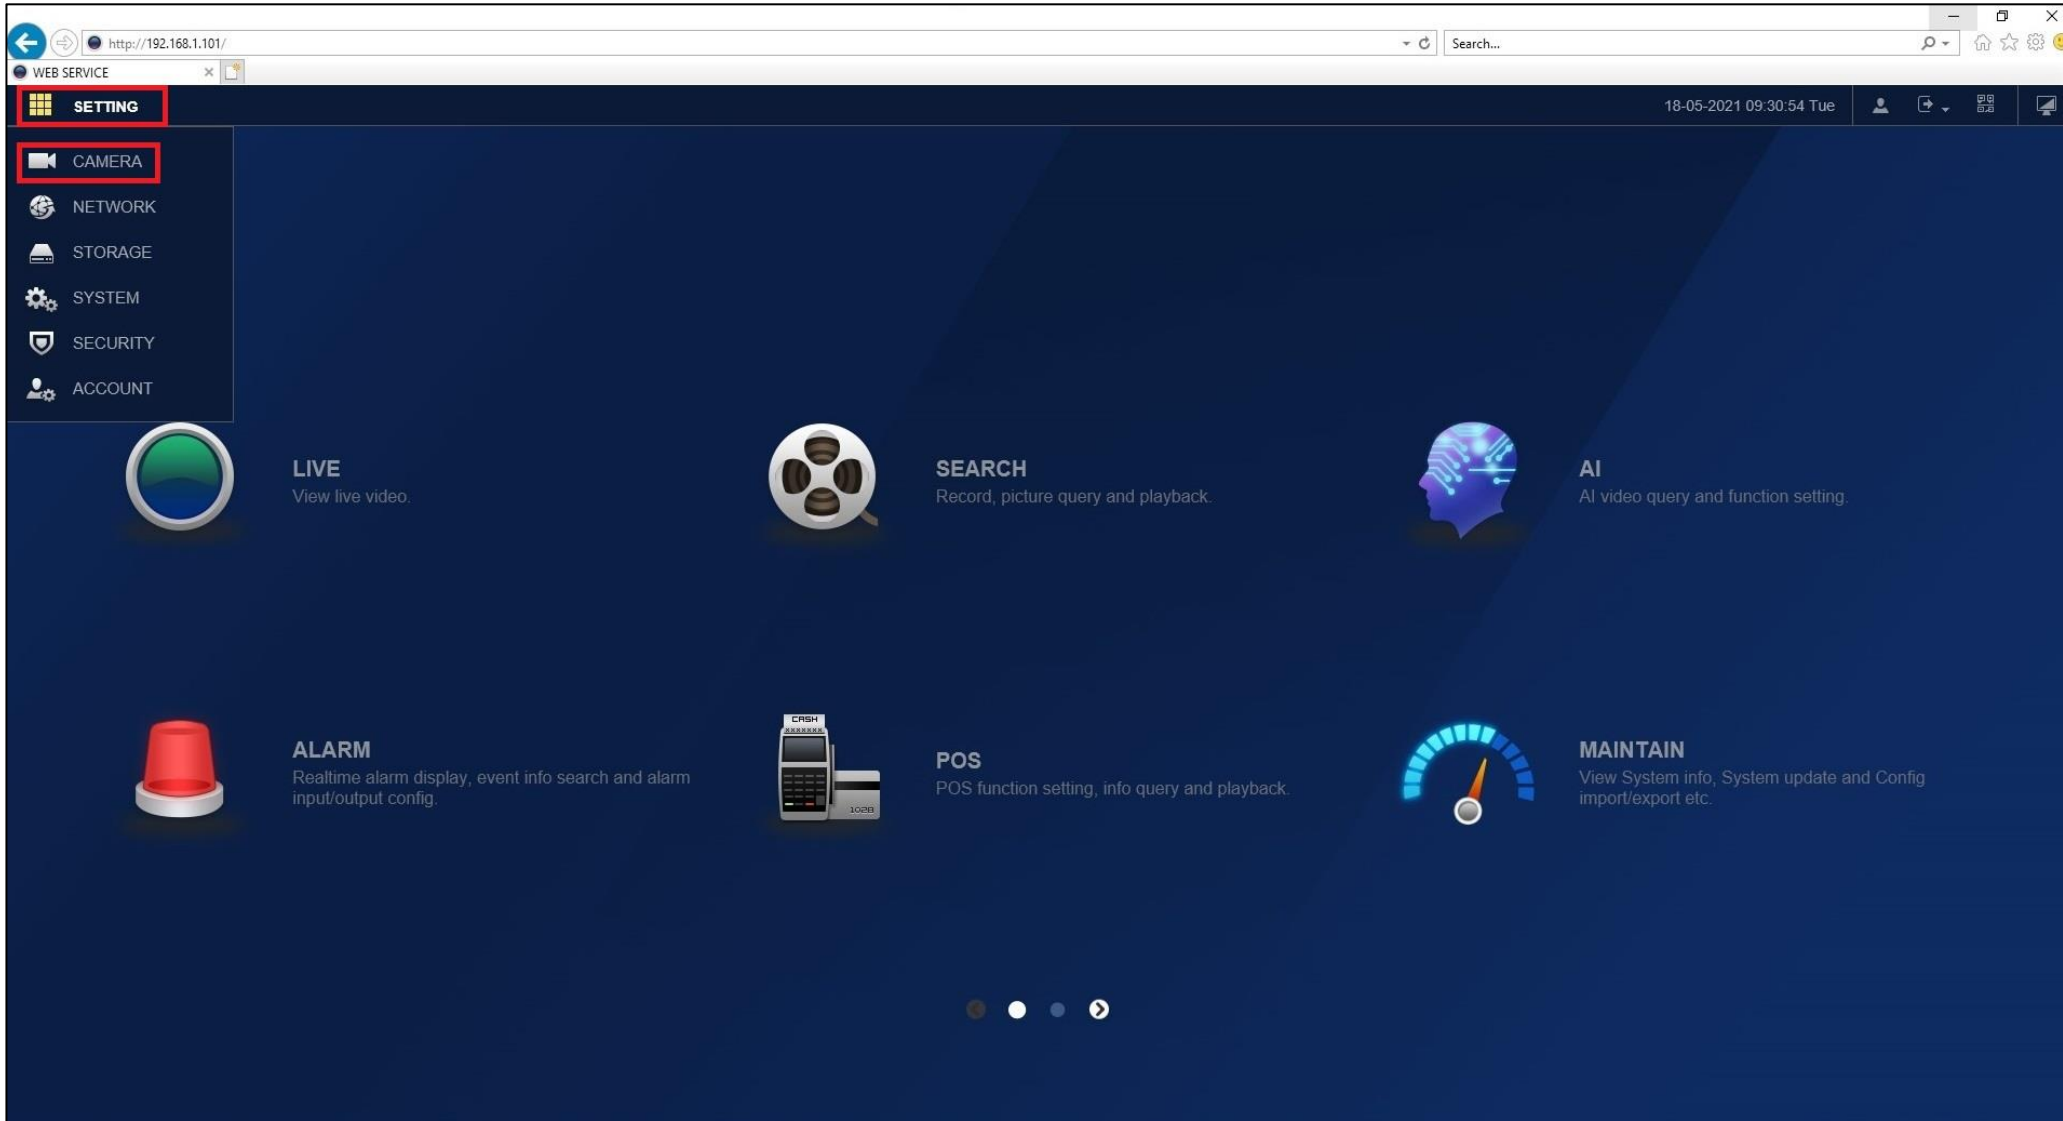

2, Click onto the **SETTING** button in the top left corner and then click on the **CAMERA** button


The screenshot shows the SPRO web interface for camera management. The main area is titled 'CAMERA' and contains a 'Camera List' section. Below this, there is a search bar and a table of camera devices. At the bottom, there is a table of 'Added Device' information. A blue 'e' icon in the 'Webpage' column of the 'Added Device' table is highlighted with a red box.

No.	Live	Status	IP Address	Port	Device Name	Manufacturer	Type	MAC Address

Channel	Modify	Delete	Status	IP Address	Port	Device Name	Remote CH No.	Manufacturer	Camera Name	Webpage	Type
1				192.168.1.110	37777	6G04D38PA...	1	Private	Channel1		ITC237-PW6...
2				10.1.1.66	Port2	5L09D33PA...	1	Private	Channel2		IP Camera
3				192.168.1.199	37777	6H04D9FRA...	1	Private	Channel3		IP Camera
4				10.1.1.68	Port4	4A02C14PA...	1	Private	Channel4		IP Camera
5				10.1.1.69	Port5	4A02C14PA...	1	Private	Channel5		IP Camera
6				10.1.1.128	Port6	2C00E1FPA...	1	Private	Channel6		IP Camera


3, Find your camera in the bottom list and click the **BLUE E ICON** next to your camera to link directly to the camera. Once you have clicked, a new tab will appear in internet explorer.

TIP: This will also work for cameras that are plugged directly into the POE ports of the NVR

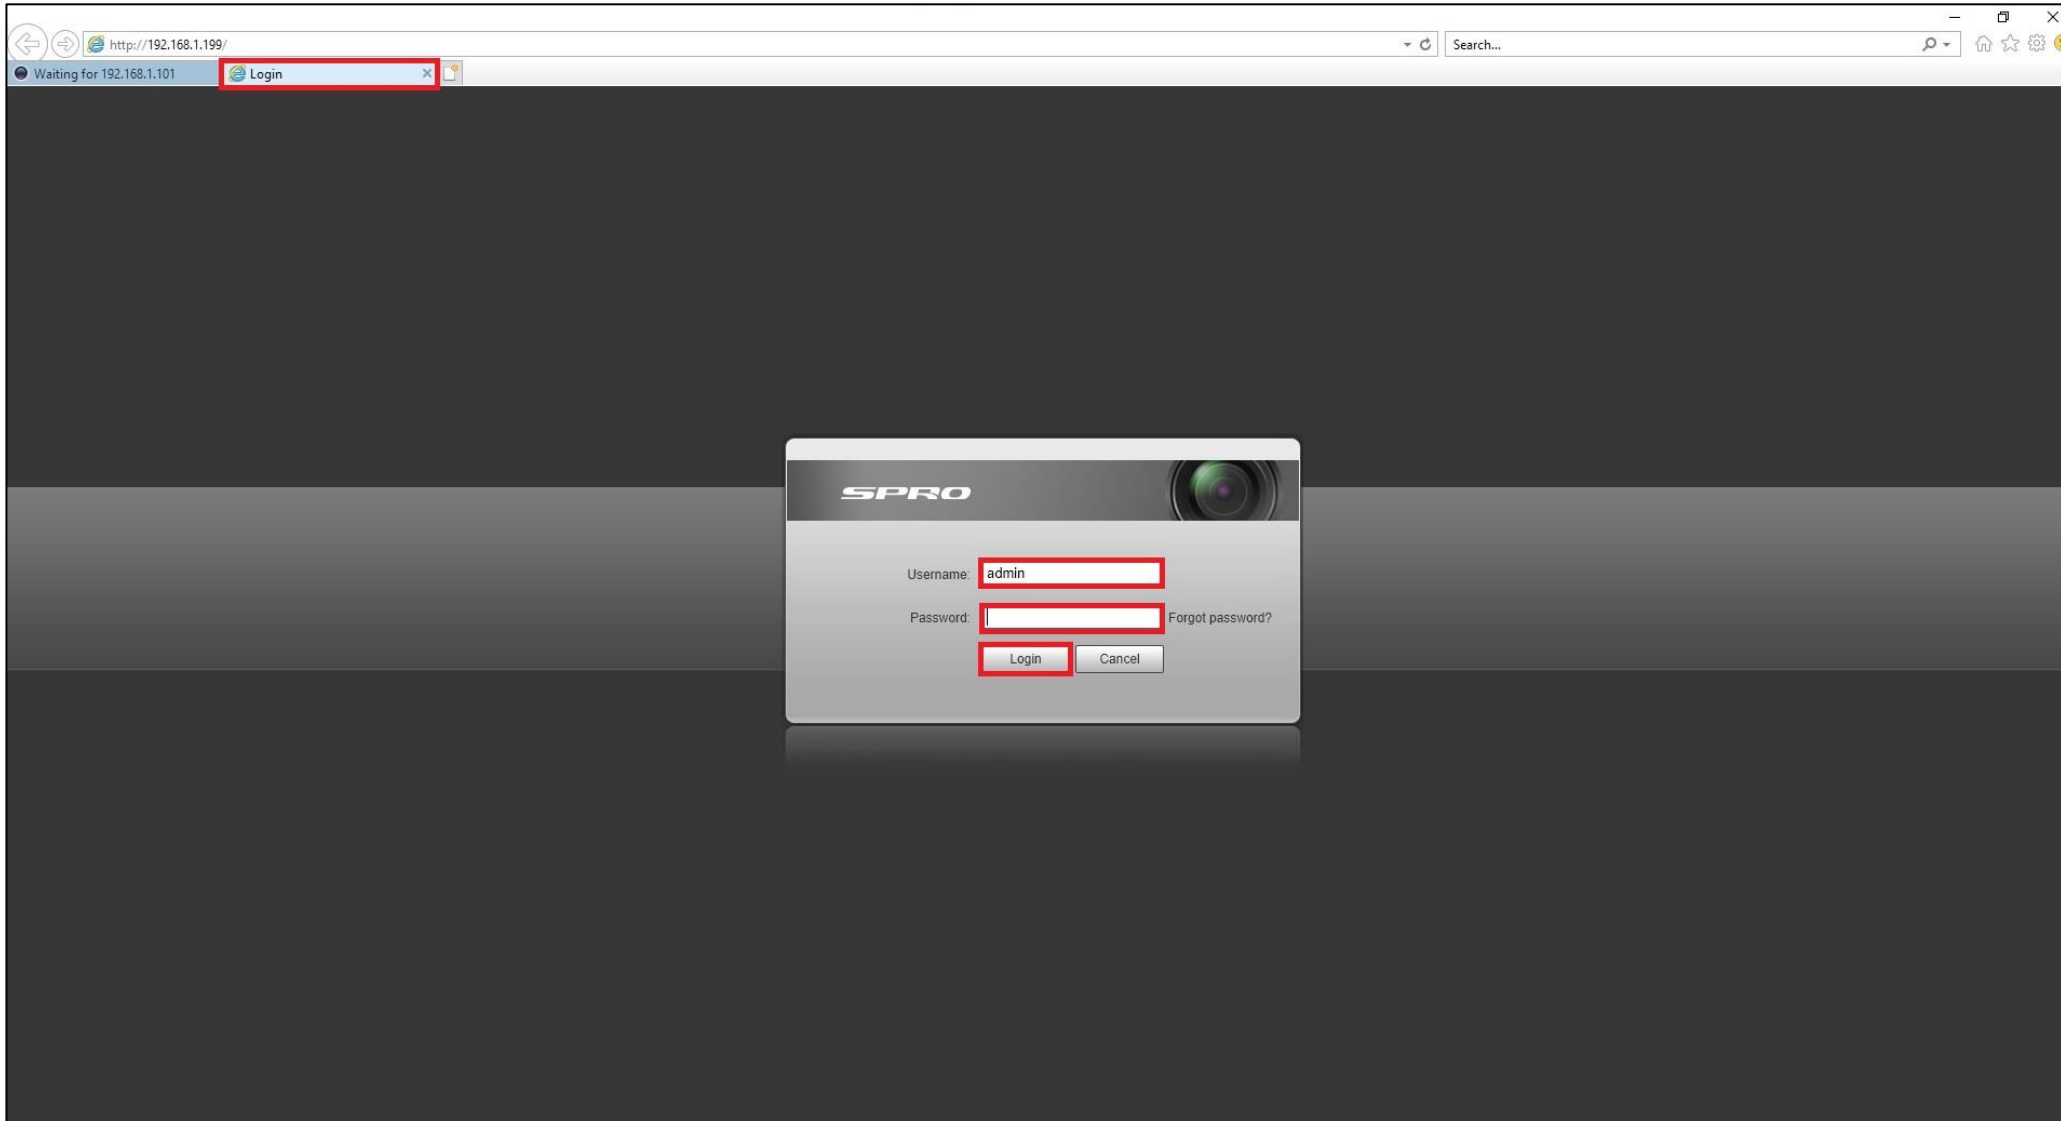


4, Click onto the **NEW TAB** that the NVR opened up and input your **USERNAME** and **PASSWORD** for the camera and click the **LOGIN** button

The username and password is usually the same as the NVR

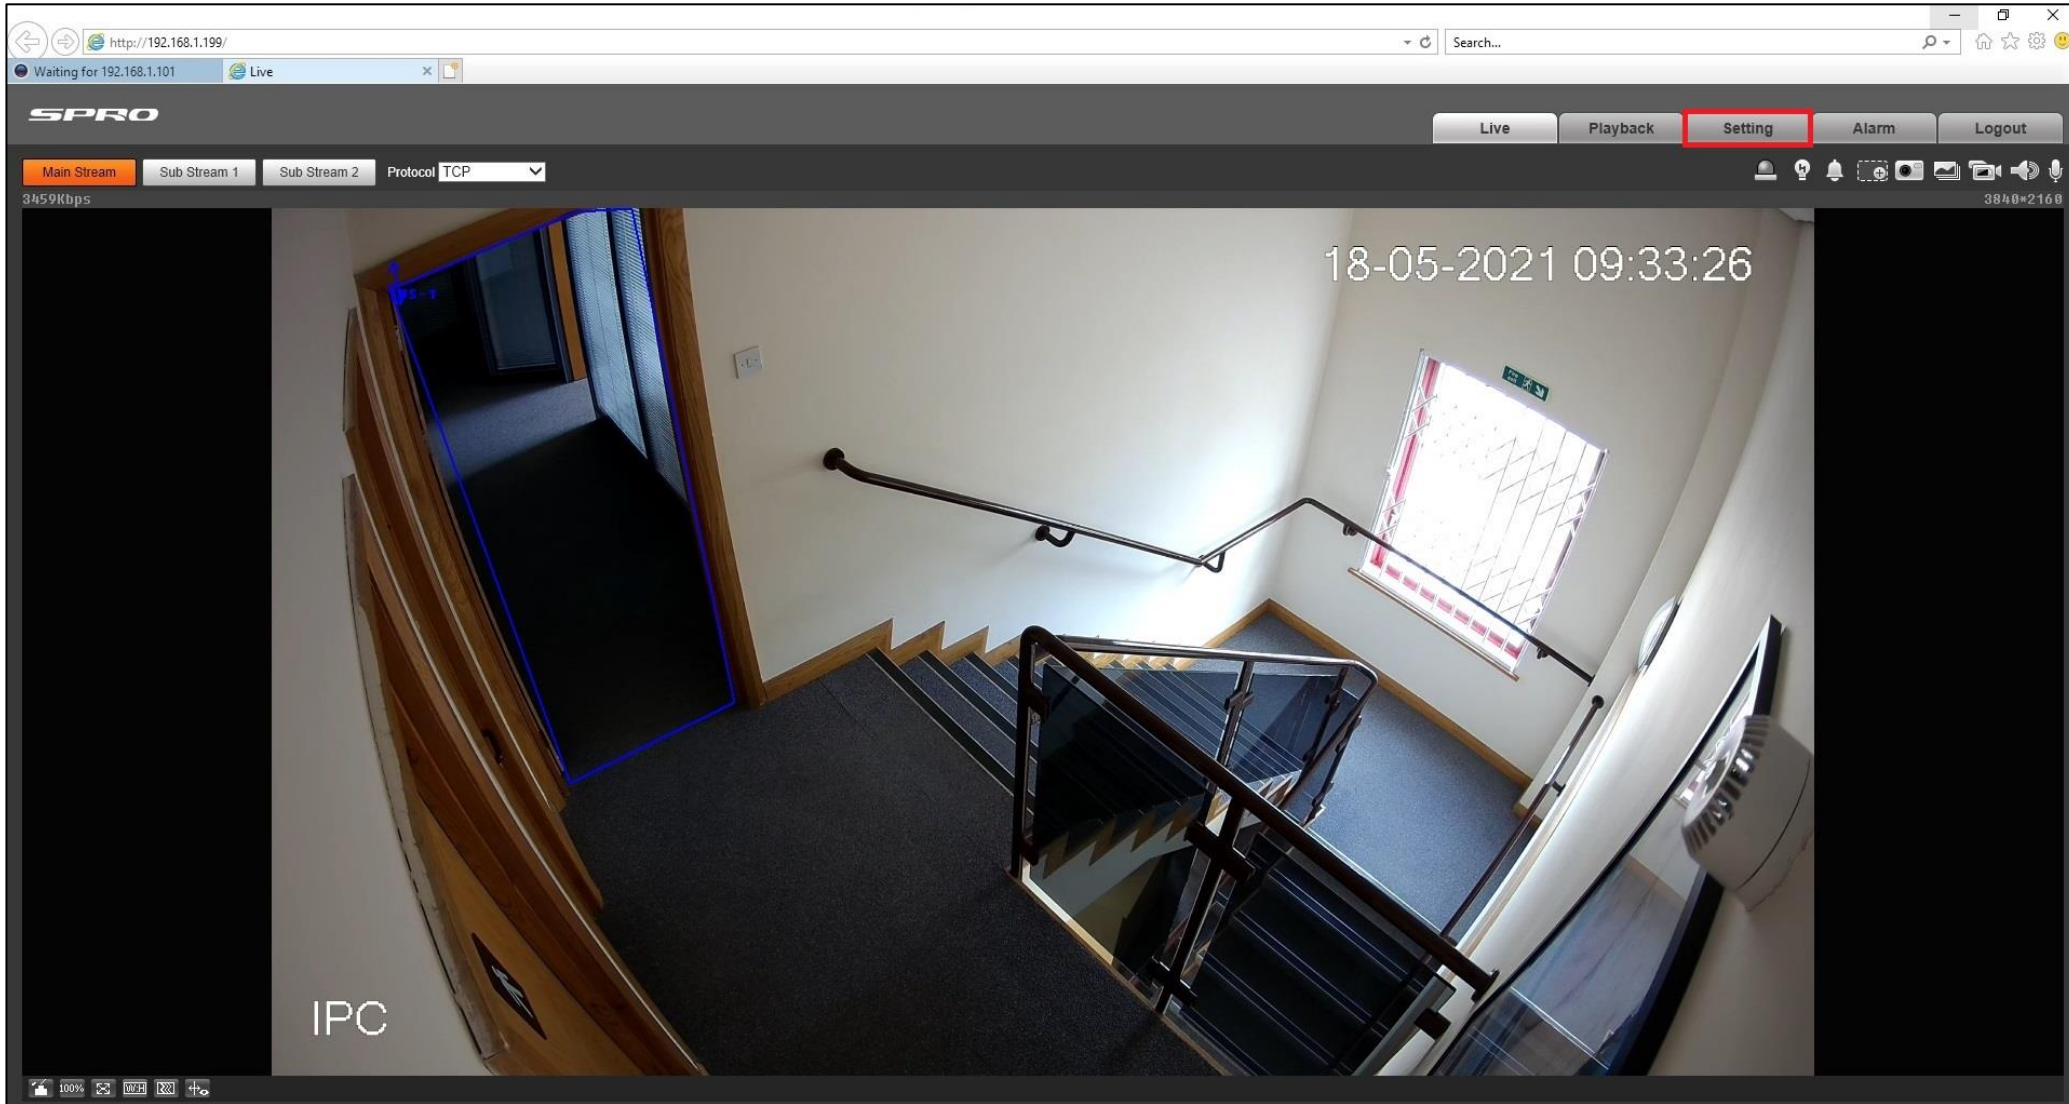

5, Once logged into your camera click on the **SETTING** button

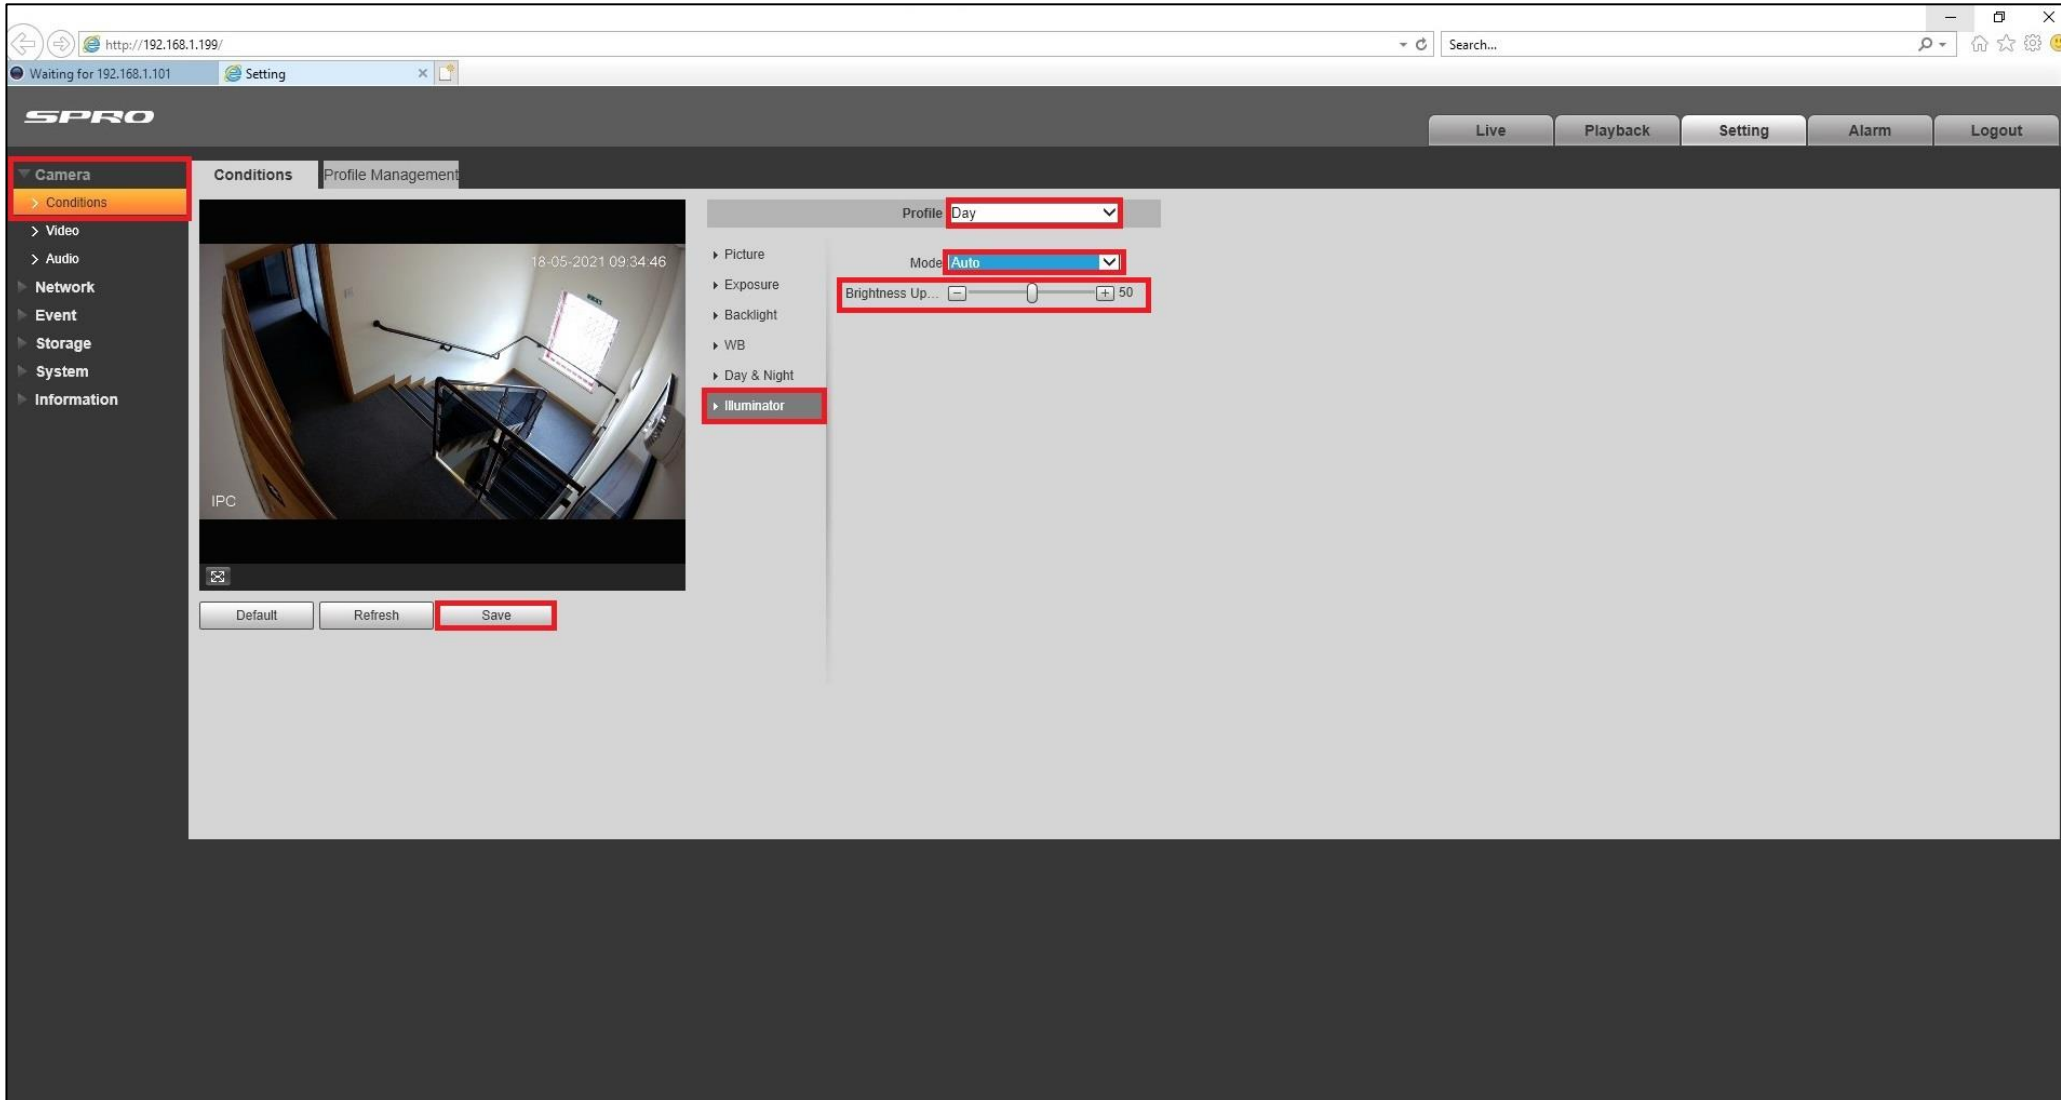

6, Click onto **CAMERA** and then **CONDITIONS** on the right hand side and then click onto **ILLUMINATOR**. Change the profile to **DAY** if not already selected and then ensure the mode is on **AUTO** and then slide the brightness bar left or right to adjust , When finished click the **SAVE** button