

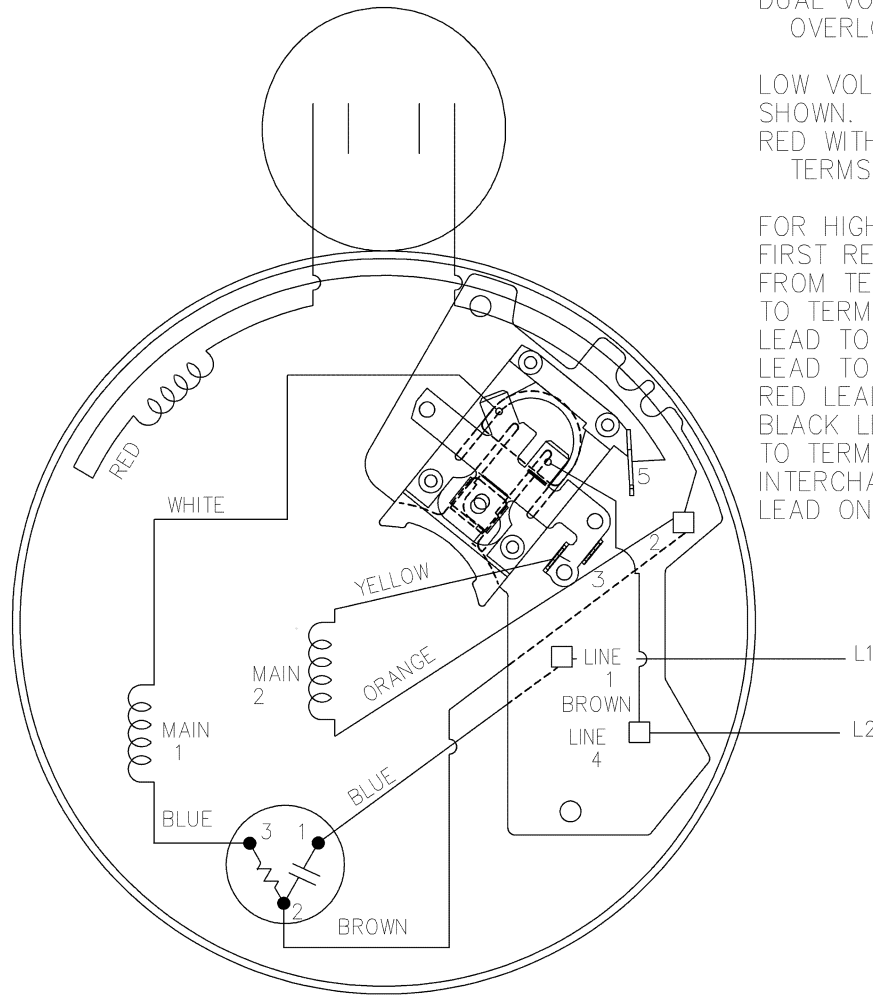


HIGH VOLTAGE - C.C.W.

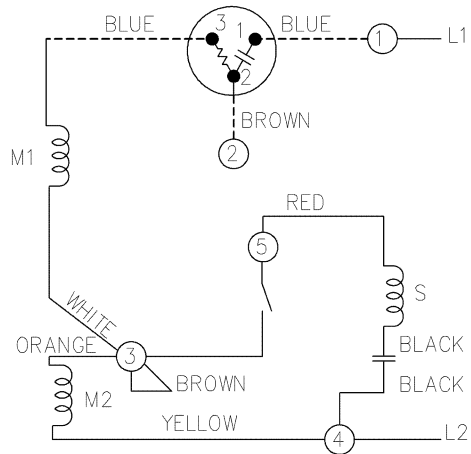

DUAL VOLTAGE CAPACITOR START OVERLOAD SELECT ROT.  
 LOW VOLTAGE C.C.W. ROTATION SHOWN. TO REVERSE INTERCHANGE RED WITH BLACK LEAD ON TERMS 2 AND 5.

FOR HIGH VOLTAGE C.C.W. ROT. FIRST REMOVE BROWN JUMPER FROM TERM. 4 AND ATTACH TO TERM.3 AND CONNECT YELLOW LEAD TO TERM.4 AND ORANGE LEAD TO TERM 3. CONNECT RED LEAD TO TERM #5 AND BLACK LEAD FROM TERM #5 TO TERM #4. TO REVERSE INTERCHANGE RED WITH BLACK LEAD ON TERMS 5 AND 4.

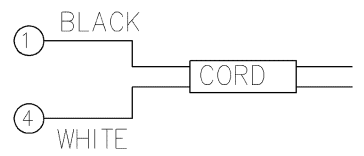

CONNECTION FOR CORD

				TOLERANCES UNLESS SPECIFIED			DRAWNRJW 03-28-02008
				DEC.	INCHES		CHK
				X	±.1		APPD
				XX	±.02		SCALE 5=8
				XXX	±.005		REF
				XXXX	±.0005	MAT'L.	FMF
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE 102005-2-LN	SIZE A	DRAWING NO. L02005-2-LN
				DIST WA			PAGE OF REV. 1