




# 5 Display Settings

## 5.1 Duplicate Mode to Extend Mode for Windows


-Right click on your desktop while Trio/Trio Max is connected and choose "Display Setting"  
 -Then you should either see this screen or the one at next Section

-If you have a duplicate screen and want to change it to extend mode, click on the "Duplicate these displays" from the drop down box

-When the drop down box is opened, choose "Extend these displays"  
 -Then click "Apply"  
 -Now you are in Extend Mode




Scroll Down

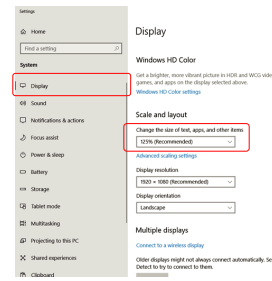

## 5.2 Duplicate Mode to Extend Mode for Mac iOS

- Click on system preference and go to Displays

- Checking the "Mirror Displays" box will switch between duplicate and extend mode for Trio/Trio Max



## 5.3 Rotate Display and Layout set up for Windows



If you are already in "Extend mode" and want to use Trio/Trio Max on the left

1. First click on the 2nd screen icon
2. Then open the Orientation drop down box and change it from "Landscape" to "Landscape (flipped)": Choose "Portrait" for Portrait Mode".
3. Then click "Apply"

-Now your screen is upside down and ready to be used on the left with 1 extra step.

-Move the 2nd display icon from the right to the left of the 1st display by simply "Drag and Drop" it.



-Click "Apply" to finish the setting of the lay out.



## 5.3 Rotate Display and Layout set up for Mac iOS

- To position the display on either left or right, simply drag and drop it to the side you want.

- To rotate the display, go to the Trio/Trio Max display window and choose the suitable "Rotation" options.




## 5.4 Change Display Settings to Adjust Content Size for Windows


1. To adjust content size on Trio/Trio Max monitor, first click on the number "2" monitor under Display setting.
2. Scroll down and look for "scale and layout" options
3. Default size of text is set at 125% and user can increase it up to 175% or reduce back to 100% base on user preference.

## 5.4 Change Display Settings to Adjust Content Size for Mac iOS

1. Click System Preferences
2. Click Displays



3. Hold down "Option" key and click "Scaled"
4. Select the resolution that fits your need




## 6 Technical Information

Model	Trio	Trio Max
Screen Size	12.5 In	14 In
Weight	1.8 Lb	2.2 Lb
Resolution	1080p FHD	1080p FHD
Refresh Rate	60Hz	60Hz
Brightness	300N	220N
Power Consumption	<4.5W	<4.5W
Dimension	12.8"x8.6"x0.5"	14.1"x9.5"x0.5"
Compatible OS	Android, Mac, Windows	
Video Signal	USB-C DP/HDMI Alternate Mode; Displaylink	

\*Specifications are subject to change without notice.

# TRIO® TRIO® MAX Portable Laptop Monitor

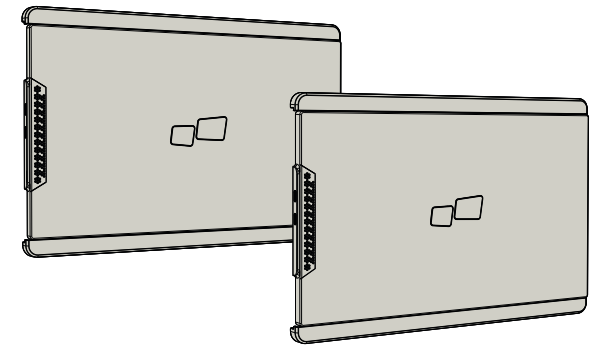

## MP User Guide

Copyright © 2021 MOBILE PIXELS INC. All Rights Reserved. No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except as documented on level by the publisher for backup purposes, without the express written permission of MOBILE PIXELS INC. Product names or devices will not be endorsed if (1) the product is reprinted, modified or altered, unless such repair, modification or alteration is authorized in writing by MOBILE PIXELS INC. or (2) the serial number of the product is destroyed or missing. MOBILE PIXELS INC. PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL MOBILE PIXELS INC. DIRECTORS, OFFICERS, EMPLOYEES OR AGENTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS AND THE LIKE) EVEN IF MOBILE PIXELS INC. HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR ERROR IN THIS MANUAL OR PRODUCT SPECIFICATION. NO INFORMATION CONTAINED IN THIS MANUAL ARE EXPRESSED FOR INFORMATIONAL USE ONLY AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY MOBILE PIXELS INC. MOBILE PIXELS INC. ASSUMES NO RESPONSIBILITY OR LIABILITY FOR ANY ERRORS OR INACCURACIES THAT MAY APPEAR IN THIS MANUAL, INCLUDING THE PRODUCTS AND SOFTWARE DESCRIBED IN IT, AND/OR AND CONSEQUENTLY APPEARING IN THIS MANUAL MAY OR MAY NOT BE REGISTERED TRADEMARKS OR COPYRIGHTS OF THEIR RESPECTIVE COMPANIES, AND ARE USED ONLY FOR IDENTIFICATION OR EXPLANATION AND TO THE OWNERS' BENEFIT, WITHOUT INTENT TO INFRINGE.

## 6.2 Safety and Handling

### IMPORTANT SAFETY INFORMATION:

Carefully go through the user manual and other documentation before setting up the TRIO/TRIO MAX. If any part is broken or damaged, do not try to open TRIO/TRIO MAX or attempt to fix it yourself, please contact the retailer, a qualified service technician or email us directly at contact@mobilepixels.us. Store TRIO/TRIO MAX under appropriate conditions, avoid exposure to extreme heat, moisture and dust. We recommend you to place TRIO/TRIO MAX in a sleeve to protect it during transport. Never spill liquid of any kind onto the surface or into the openings of the TRIO/TRIO MAX. Do not spray any cleaner on the screen to avoid an electric shock. If your TRIO/TRIO MAX gets wet, unplug all cables and reconnect them in the TRIO/TRIO MAX is completely dry. Carefully unplug all cables before cleaning TRIO/TRIO MAX. Clean with a soft, dry, lint-free cloth. To ensure satisfactory experience, use the TRIO/TRIO MAX with recommended display size of your laptop. Please disconnect the cables when you reverse the position of TRIO/TRIO MAX, decouple the TRIO/TRIO MAX from the backplane of your laptop, rotate 180°. About a vector normal to the backplane, and re-couple to the backplane of the laptop computer.

### CHOKING HAZARD:

TRIO/TRIO MAX and accessories contain small parts that may present a choking hazard to small children, please keep them out of reach from small children.

### MEDICAL DEVICE INTERFERENCE:

The TRIO/TRIO MAX contains magnets. The TRIO/TRIO MAX also contain components and radios that emit electromagnetic fields, it may interfere with personal medical devices, e.g. pacemakers or defibrillators. Keep a safe distance between the TRIO/TRIO MAX and your medical device. Consult a physician or medical device manufacturer for specific details of your medical device. Stop using TRIO/TRIO MAX if the interference is observed with

your personal medical devices. Items with magnetically-stored data such as credit cards and hard drives may be sensitive to magnetic or electromagnetic fields, these should be kept at a distance from TRIO/TRIO MAX.

### FCC COMPLIANCE STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference. 2. This device must accept any interference received including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 1. Reorient or relocate the receiving antenna. 2. Increase the separation between the equipment and receiver. 3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. 4. Consult the dealer or an experienced radio/TV technician for help.

### WARRANTY

Mobile Pixels INC warrants this product for a period of 1 year upon the original date of purchase. Product or service warranty will not be extended to any losses or damages that are due to improper installation, misuse, neglect, modification, alteration by non-authorized third party, improper environment, or other irregularities.


### SUPPORT:

For detailed troubleshooting information, contact:

CONTACT@MOBILEPIXELS.US

# Package overview

## 1.1 Monitor & accessories

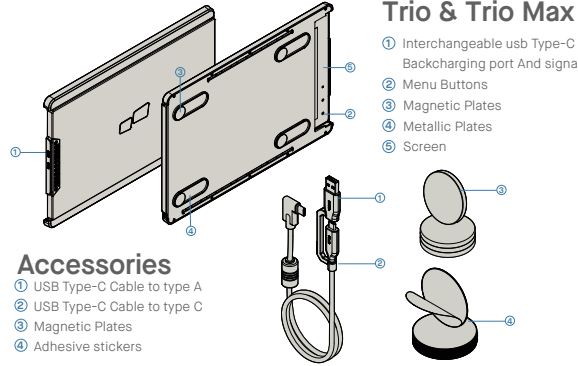

- Accessories**
- ① USB Type-C Cable to type A
  - ② USB Type-C Cable to type C
  - ③ Magnetic Plates
  - ④ Adhesive stickers


# 2 DRIVER INSTALLATION GUIDE

When using USB C to connect, driver installation is not necessary.


## 2.1 Windows installation guide

Connect Windows Laptop to Mobile Pixels Trio/Trio Max Monitor, wait 20 secs and the monitor should turn on. In the event the monitor does not turn on, please follow the steps below:

1. Please download the correct windows driver from: [WWW.MOBILEPIXELS.US/PAGES/DOWNLOAD-DRIVERS](http://WWW.MOBILEPIXELS.US/PAGES/DOWNLOAD-DRIVERS)
2. Double click and launch the installer. Click "Yes" in the window below.
3. Click "Next" in the window below:



4. Please select "I accept the terms of the license agreement" and click Next




## 2.2 Apple iOS installation guide

Do not plug the Mobile Pixels Device into your mac before executing the driver installation


1. Please download the Mac driver from the link below. Run the .pkg file to load the drivers to the mac folder
2. Click "MP\_Graphics\_Driver\_v1.0.0.pkg", please follow the instructions to install the device driver.

[WWW.MOBILEPIXELS.US/PAGES/DOWNLOAD-DRIVERS](http://WWW.MOBILEPIXELS.US/PAGES/DOWNLOAD-DRIVERS)


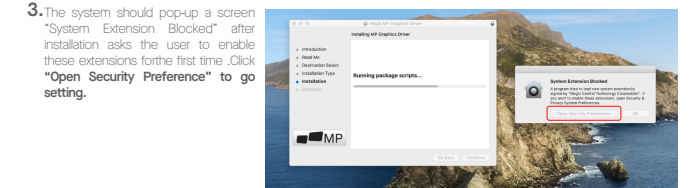


3. The system should pop-up a screen "System Extension Blocked" after installation asks the user to enable these extensions for the first time. Click "Open Security Preference" to go setting.


Important: This warning is not always shown. Even if it is not shown, for new installations the user must "Allow" to install the Mobile Pixels driver and restart the laptop



4. (After System Reboot) Connect Mobile Pixels device to Mac computer, a screen recording prompt should pop up "Click Open System Preferences"
5. Go to System Preferences > Security & Privacy > Privacy
7. Scroll and select "Screen Recording" and check "DJTVirtualDisplayAgent"

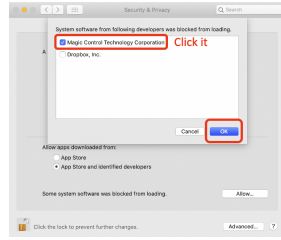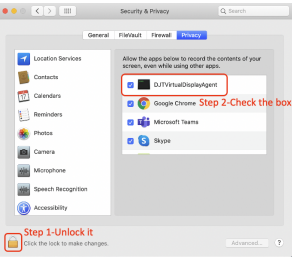


6. Click on the "Lock" to make changes
8. Click on the Lock to save changes Click "Quit Now" and restart the laptop.

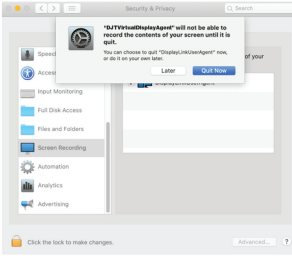


# 3 Attachment Guide

Clean laptop surface with included alcohol pad. Wait 10 secs for surface to dry.

## Instruction for laptops under 16" monitor

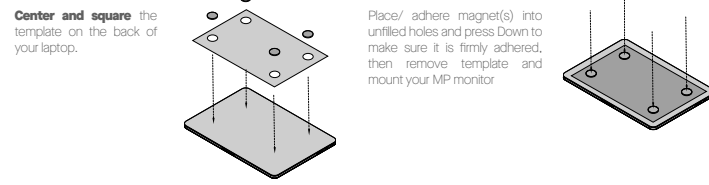


## Instruction for laptops above 16" monitor

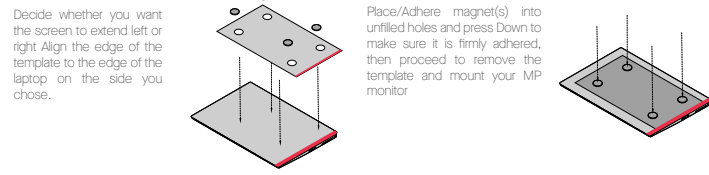


# 4 Monitor positioning guide

## 4.1 Attachment mode

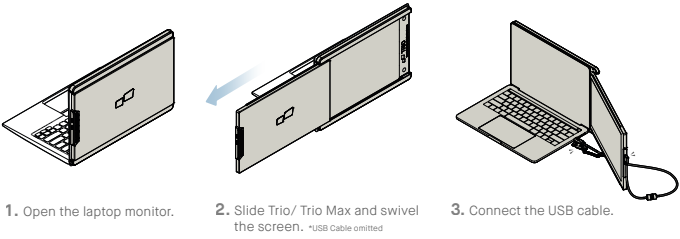

## 4.2 Rotated monitor

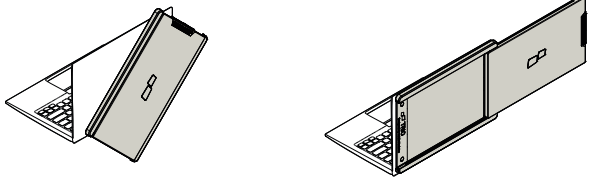


## 4.3 Portrait Mode



## 4.4 Presentation Mode



## 4.5 Trio/Trio Max 3-Screen Mode

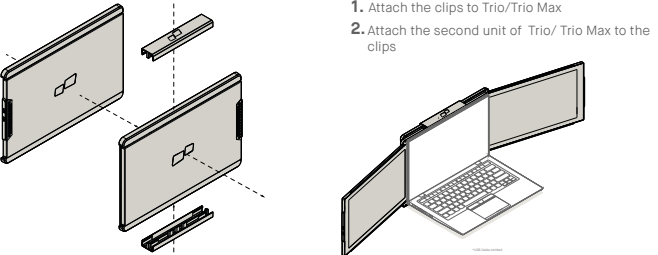

## 4.6 Nintendo Switch & Android mode Trio/Trio Max Only

