




MONO1

Cable Connections

Ver. 1.0

Nov. 13, 2017

Projector cable connections

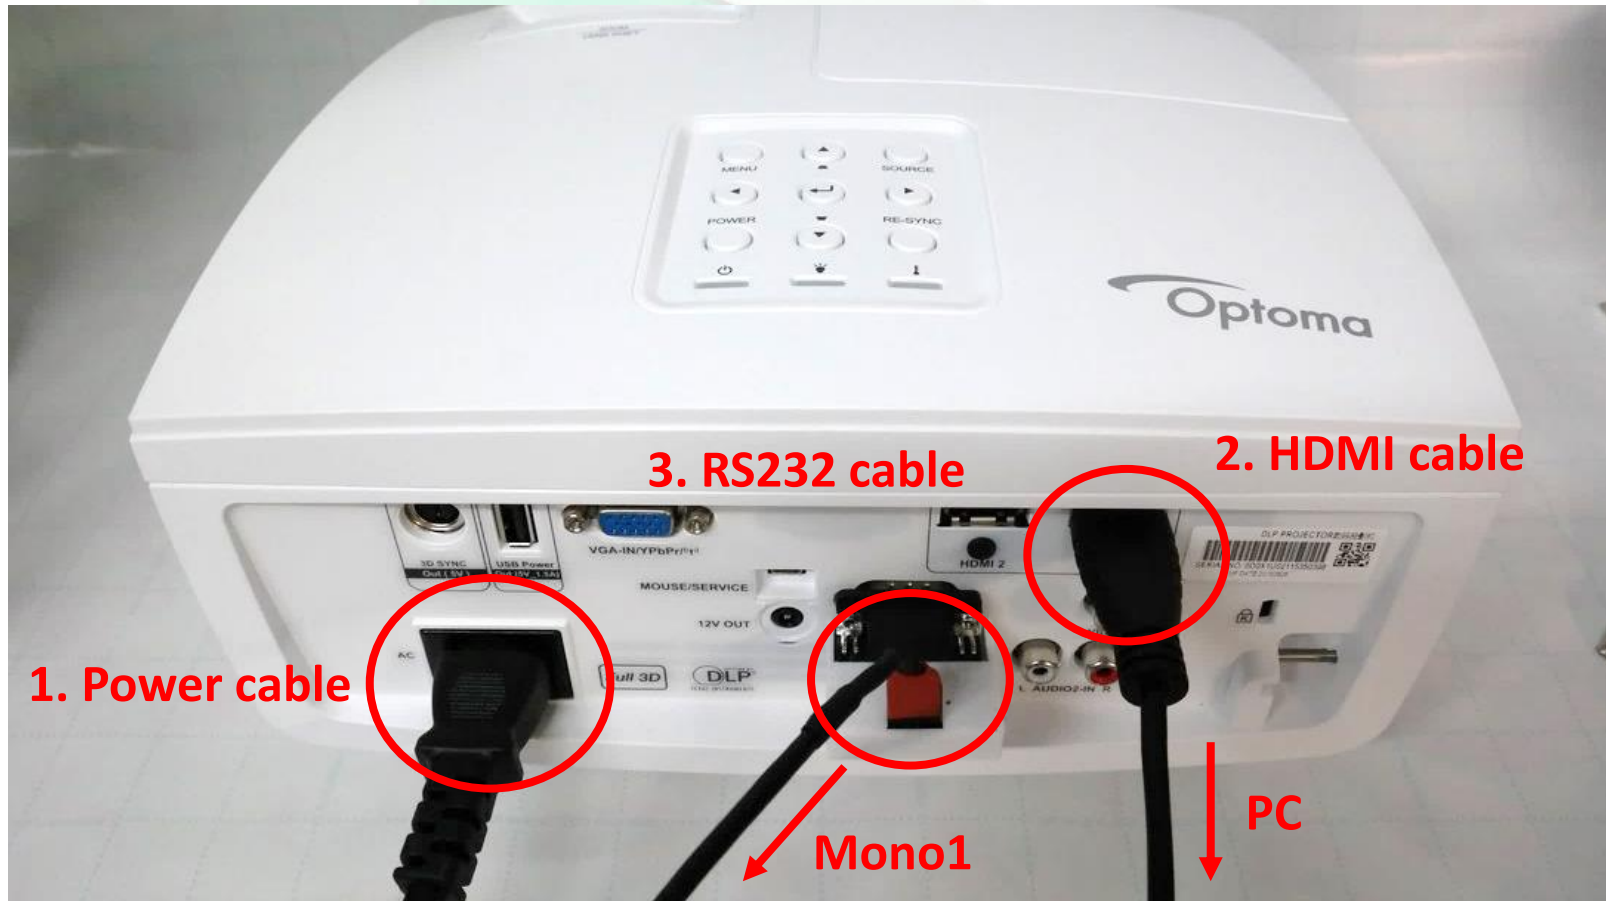

- Connect 3 cables on the projector; power cable → HDMI cable → RS232 cable


Mono1 cable connections




- Connect 3 cables on the projector; 12V DC adapter → USB A male → USB B male
- Connect USB B male cable last. Or the connection between Mono1 and Projector might fail.

MonoWare connection


- Launch MonoWare
- Go to 'Printer Setting' and refresh COM ports

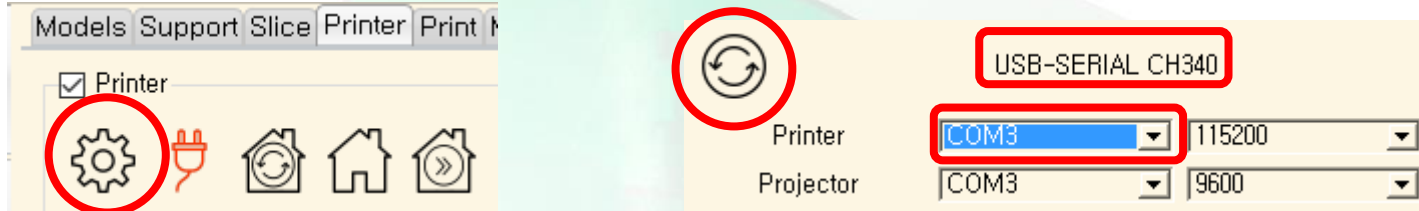

- Select a COM port that shows USB-SERIAL CH340.
- Baud rate is usually 115200. Don't need to change.
- Press OK button to save and finish the window.
- Press Connect button. Then MonoWare will connect to Mono1.

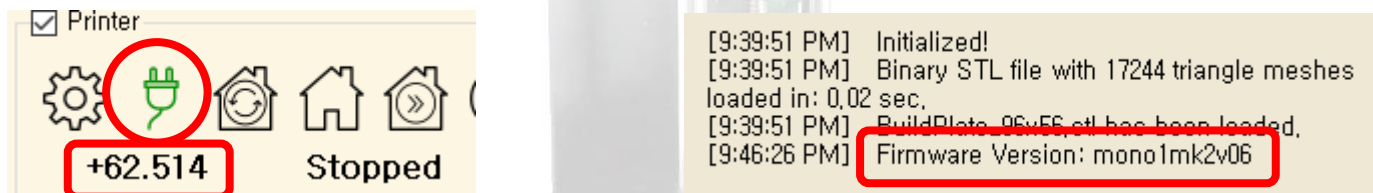

- If the connection is successful, the firmware version will be displayed and the motor position will be updated.
- Press 'Check projector bulb hours' button several times until the actual bulb hours are displayed on the message box. This makes sure the connection between Mono1 and projector established.

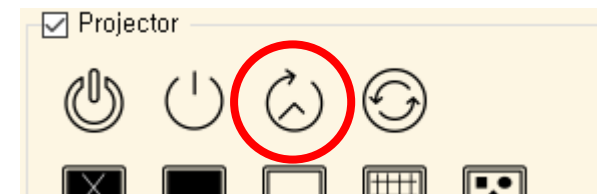

Troubleshooting

Q: Can't find the COM port with CH340.

A: CH340 driver is not properly installed. Go to http://www.wch.cn/download/CH341SER_EXE.html and install the driver.

Q: Connection icon turns Green, but no firmware version and no motor position is displayed.

A: COM port is not correct. Go to 'Printer Setting' again and check if you correctly choose a COM port with CH340

Q: I selected the COM port with CH340, but still don't see the firmware version.

A: Firmware might be corrupted. Upload a new firmware.





Thank you!