

LED Parking Garage Light

Hale Series



Hale Series

Beyond LED's Hale Series Parking garage fixture is the most economical fixture of its kind. At Beyond LED we know every parking garage application is unique. To that end our approach is to apply a total space evaluation to understand what you want to accomplish so we can design a lighting solution for the total parking garage space. Hale fixtures offer high-performance, energy-efficiency, and the best technology to deliver parking garage lighting for optimum "sealability", safety and security. Beyond LED products are supported by pre-sale & post-sale, service and layout assistance.

- Up to 130 Lumens per watt
- Quick and easy mounting and installation
- Die Cast Aluminum Housing
- 1/2" conduit entries on two sides
- 3/4" conduit entry on top for pendant mounting
- IP65 Waterproof Rated
- Universal 100-277Vac


lale Serie	S						
SKU #	Model #	Watts	Lumens	ССТ	IP	Input Voltage	Certifications
151702	BLT-PG02-40WAANA1-50K	40W	5200Lm	5000K	IP65	100-277Vac	UL & DLC
151703	BLT-PG02-55WAANA1-50K	55W	7150Lm	5000K	IP65	100-277Vac	UL & DLC
151704	BLT-PG02-75WAANA1-50K	75W	9750Lm	5000K	IP65	100-277Vac	UL & DLC
151705	BLT-PG02-100WAANA1-50K	100W	13000Lm	5000K	IP65	100-277Vac	UL & DLC


 \square

ALLAN NIT


Dimensions



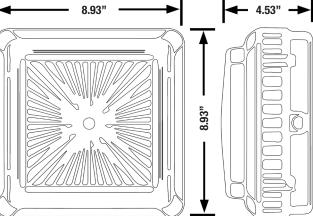

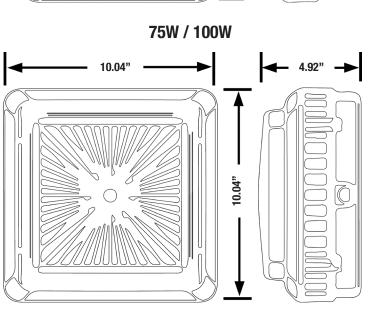

CORRELATED COLOR TEMPERATURE (CCT)

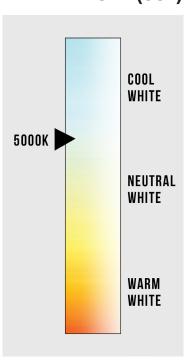

(866) 786-1117 • www.BeyondLEDTechnology.com Due to continuous product improvement, information in this document is subject to change.




40W Specifications

	Input Power	40W				
	Lumen	5200Lm				
OPTICAL	Lumen Efficacy	126-132 LM/W				
OPTICAL	Color Temperature	5000K				
	CRI	>80				
	Viewing Angle	160°				
	Input Voltage	100-277VAC 50/60Hz				
	PF	≥0.9				
ELECTRICAL	тно	≤20%				
	Driver Brand	Beyond Brand Driver				
	Optional Accessory	Motion sensor, Surge Protective Device				
	LED Type	SMD2835 (0.5W)				
	LED QTY	120 PCS				
MATERIALS	Housing	Aluminum + PC				
MATERIALS	Housing Color	Any colors				
	Cover	Stripe PC Cover				
	Waterproof Rating	WET (IP65)				
	Operating Temperature	-4°F to 113°F				
	Operating Humidity	20%-90% RH				
OTHERS	Storage Temperature	-22°F to 176°F				
	Storage Humidity	10%-95% RH				
	Warranty Time	5 Years				



40W Distribution Diagram

DATA OF LA	MP		PHOTOME	TRIC DATA Eff: 130	0.78 lm/W
MODEL		Imax (cd)	1353	S/MH(C0/180)	2.10
NOMINAL POWER(W) 40		LOR (%)	100.0	S/MH(C90/270)	2.10
RATED VOLTAGE (V)	120	TOTAL FLUX(lm)	5368.6	η UP, DN (C0-180)	1.9,48.3
NOMINAL FLUX(lm)	5368.57	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8,48.0
LAMPS INSIDE	1	η up(%)	3.7	CIBSE SHR NOM	2.00
TEST VOLTAGE(V) 120.0		η down (%)	96.3	CIBSE SHR MAX	0.00

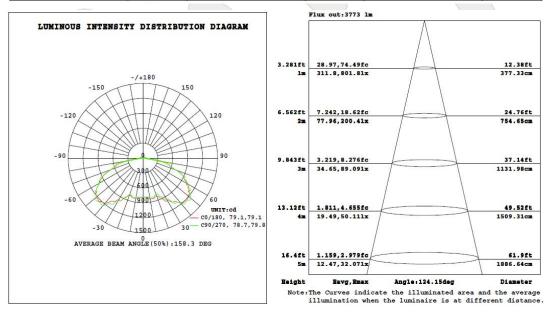







Due to continuous product improvement, information in this document is subject to change.

55W Specifications


	Input Power	55W				
	Lumen	7150Lm				
OPTICAL	Lumen Efficacy	127-133 LM/W				
	Color Temperature	5000K				
	CRI	>80				
	Viewing Angle	160°				
	Input Voltage	100-277VAC 50/60Hz				
	PF	≥0.9				
ELECTRICAL	THD	≤20%				
LEEGINIOAL	Driver Brand	Beyond Brand Driver				
	Optional Accessory	Motion sensor, Surge Protective Device, Emergency power				
	Optional Accessory	supply				
	LED Type	SMD2835 (0.5W)				
	LED QTY	165 PCS				
MATERIALS	Housing	Aluminum + PC				
WATERIALS	Housing Color	Any colors				
	Cover	Stripe PC Cover				
	Waterproof Rating	WET (IP65)				
	Operating Temperature	-4°F to 113°F				
	Operating Humidity	20%-90% RH				
OTHERS	Storage Temperature	-22°F to 176°F				
	Storage Humidity	10%-95% RH				
	Warranty Time	5 Years				





55W Distribution Diagram

DATA OF LA	MP	PHOTOMETRIC DATA Eff: 131.				
MODEL		Imax (cd)	1838 S/MH(C0/18		2.09	
NOMINAL POWER (W) 55		LOR (%)	100.0	S/MH(C90/270)	2.09	
RATED VOLTAGE (V)	120	TOTAL FLUX(lm)	7305.2	η UP, DN (C0-180)	1.9,48.4	
NOMINAL FLUX (lm)	7305.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8,47.9	
LAMPS INSIDE 1		η up(%)	3.7	CIBSE SHR NOM	2.00	
TEST VOLTAGE(V) 120.0		n down (%)	96.3	CIBSE SHR MAX	0.00	

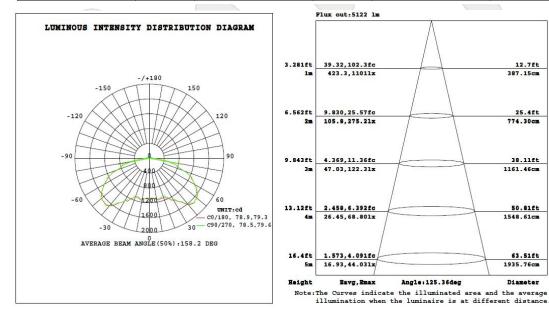







Due to continuous product improvement, information in this document is subject to change.

75W Specifications


	Input Power	75W				
	Lumen	9750Lm				
OPTICAL	Lumen Efficacy	127-133 LM/W				
OPTICAL	Color Temperature	5000K				
	CRI	>80				
	Viewing Angle	160°				
	Input Voltage	100-277VAC 50/60Hz				
	PF	≥0.9				
ELECTRICAL	THD	≤20%				
	Driver Brand	Beyond Brand Driver				
	Optional Accessory	Motion sensor, Surge Protective Device				
	LED Type	SMD2835 (0.5W)				
	LED QTY	225 PCS				
MATERIALS	Housing	Aluminum + PC				
MATERIALS	Housing Color	Any colors				
	Cover	Stripe PC Cover				
	Waterproof Rating	WET (IP65)				
	Operating Temperature	-4°F to 113°F				
	Operating Humidity	20%-90% RH				
OTHERS	Storage Temperature	-22°F to 176°F				
	Storage Humidity	10%-95% RH				
	Warranty Time	5 Years				





75W Distribution Diagram

DATA OF LA	MP	PHOTOMETRIC DATA Eff: 131.61				
MODEL		Imax (cd)	2566	S/MH(C0/180)	2.12	
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)	2.06	
RATED VOLTAGE (V)	120	TOTAL FLUX(lm)	9894.2	η UP, DN(C0-180)	2.3,48.0	
NOMINAL FLUX(lm) 9894.21		CIE CLASS	DIRECT η UP, DN (C180-3		2.3,47.4	
LAMPS INSIDE 1		η up(%)	4.6	CIBSE SHR NOM	2.00	
TEST VOLTAGE(V) 120.0		η down (%)	95.4	CIBSE SHR MAX	0.00	

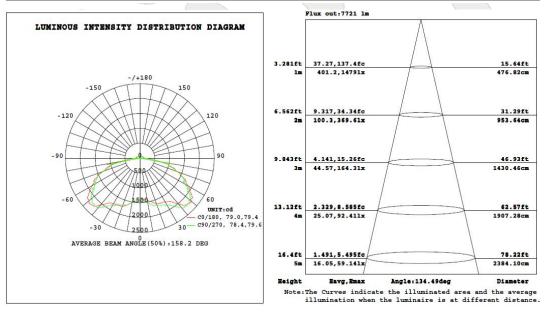



(866) 786-1117 • www.BeyondLEDTechnology.com Due to continuous product improvement, information in this document is subject to change.



100W Specifications


	Input Power	100W				
	Lumen	13000Lm				
ODTICAL	Lumen Efficacy	126-132 LM/W				
OPTICAL	Color Temperature	5000K				
	CRI	>80				
	Viewing Angle	160°				
	Input Voltage	100-277VAC 50/60Hz				
	PF	≥0.9				
ELECTRICAL	тно	≤20%				
	Driver Brand	Beyond Brand Driver				
	Optional Accessory	Motion sensor, Surge Protective Device				
	LED Type	SMD2835 (0.5W)				
	LED QTY	300 PCS				
MATERIALS	Housing	Aluminum + PC				
MATERIALS	Housing Color	Any colors				
	Cover	Stripe PC Cover				
	Waterproof Rating	WET (IP65)				
	Operating Temperature	-4°F to 113°F				
	Operating Humidity	20%-90% RH				
OTHERS	Storage Temperature	-22°F to 176°F				
	Storage Humidity	10%-95% RH				
	Warranty Time	5 Years				





100W Distribution Diagram

DATA OF	LAMP	PHOTOMETRIC DATA Eff: 130.52				
MODEL	- 20	Imax (cd)	3483	2.13		
NOMINAL POWER (V) 100	LOR(%)	100.0	S/MH(C90/270)	2.08	
RATED VOLTAGE () 120	TOTAL FLUX(lm)	13300	η UP, DN(C0-180)	2.3,48.1	
NOMINAL FLUX(lm) 13299.8		CIE CLASS	DIRECT	η UP, DN (C180-360)	2.3,47.4	
LAMPS INSIDE 1		η up(%)	4.6	CIBSE SHR NOM	2.00	
TEST VOLTAGE (V) 120.0		η down (%)	95.4	CIBSE SHR MAX	0.00	

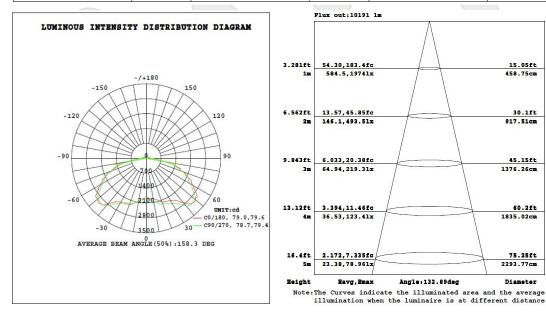






(866) 786-1117 • www.BeyondLEDTechnology.com Due to continuous product improvement, information in this document is subject to change.





Packing

SKU #	Watts	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151702	40W	1	12" X 11" X 7"	6 Lb			
151702	40W	4	23" X 15" X 12"	23 Lb			
151703	55W	1	12" X 11" X 7"	6 Lb			
151703	55W	4	23" X 15" X 12"	24 Lb			
151704	75W	1	13" X 12" X 8"	8 Lb			
151704	75W	2	16" X 13" X 13"	18 Lb			
151705	100W	1	13" X 12" X 8"	9 Lb			
151705	100W	2	16" X 13" X 13"	19 Lb			

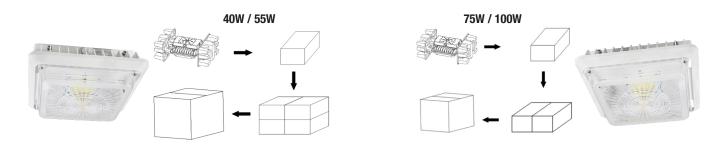

User Notice

- Please turn off the power before installing or changing assembly parts.
- The input voltage and lamps should be matching. Before connecting the power line, please make sure the wiring section is insulated.
- Only professionals should install and disassemble the lamps.

Trouble Shooting

- Flickering light Turn off the power and turn on again in 3 minutes. If the same phenomena occurs, then call Support.
- Not working Please check all power connections.

Installation

Cautions:

- 1. Can not use the electric generator to test the LED lamp.
- 2. Please abide by related country, regional and local law and regulations when install this fixture.
- 3. Please turn off the power before installation or maintenance.
- 4. Proper earth grounding is required to ensure safety.


Notice:

- 1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- 2. Please wear gloves to avoid injury before installation.
- 3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

Attention:

- 1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
- 2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

Wiring Diagram:

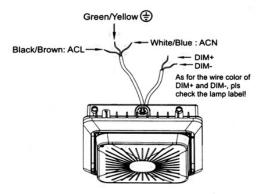

☑Installation Method I :

- 1. Disassemble the driver box cover by loosen the two screws on the driver box; Figure 1-1
- 2. Loosen the 3/4 plug on the driver box cover by screwdriver; Figure 1-2
- 3. Fix the driver box cover on the 3/4 tube; Figure 1-3
- 4. Insert the mounting hole of radiator horizontally to the shaft of driver cover; Figure 1-4
- 5. Connect the input line and ground; If the fixture is equipped with sensor, adjust the sensor settings, Take relevant waterproof measures after the wires are connected ;Figure 1-5
- 6. Turn the radiator up then cover the driver box, Figure 1-6
- 7. Lock the two cap screws, the product is installed. Figure 1-7

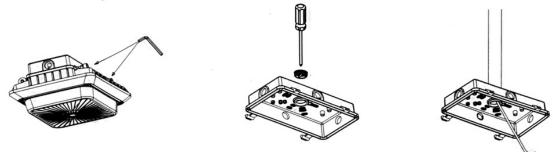


Figure 1-2

Figure 1-1



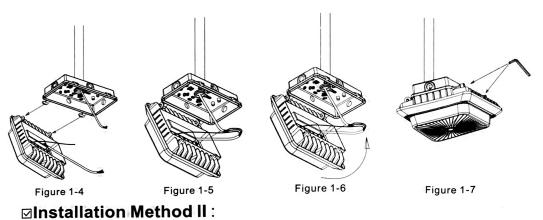


Figure 1-3





Installation




1. Disassemble the driver box cover by loosen the two screws on the driver box; Figure 2-1

- Disassemble the driver box cover by loosen the two screws on the driver box, Figure 2
 Loosen the 3/4 plug on the driver box cover by screwdriver; Figure 2-2
- 3. Drill the holes on the ceiling accordingly to fit the plate; Figure 2-3
- 4. Fix the driver box cover on the ceiling; Figure 2-4

5. Insert the mounting hole of radiator horizontally on the shaft of driver cover; Figure 2-5

- 6. Connect the input line and ground; If the fixture is equipped with sensor, adjust the sensor settings; Take relevant waterproof measures after the wires are connected ;Figure 2-6
- 7. Turn the radiator up then cover the driver box, Figure 2-7
- 8. Lock the two cap screws, the product is installed. Figure 2-8

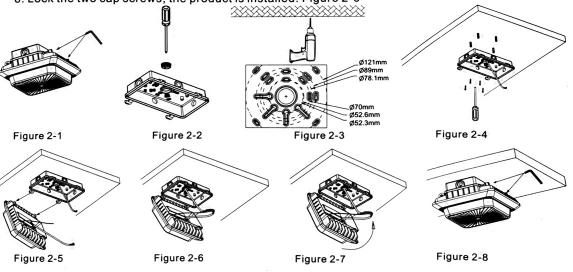


□Installation Method III :

- 1. Disassemble the driver box cover by loosen the two screws on the driver box; Figure 3-1
- 2. Loosen the 3/4 plug on the driver box cover by screwdriver; Figure 3-2
- 3. Drill holes on the ceiling; Figure 3-3
- 4. Fix the driver box cover on the ceiling; Figure 3-4
- 5. Fix the lower bracket on the driver box cover; Figure 3-5
- 6. Align with the holes of upper and lower bracket; tighten with screws; Figure 3-6
- 7. Insert the mounting hole of radiator horizontally on the shaft of driver cover; Figure 3-7
- 8. Use M20 waterproof connector when connecting AC wire or dimming wire, take relevant waterproof measures at both sides of inlet. Figure 3-8
- Connect the input line and ground; If the fixture is equipped with sensor, adjust the sensor settings; Take relevant waterproof measures after the wires are connected; Figure 3-9
- 10. Turn the radiator up then cover the driver box, Figure 3-10
- 11. Lock the two cap screws, the product is installed. Figure 3-11

LED CANOPY LIGHTS

Installation

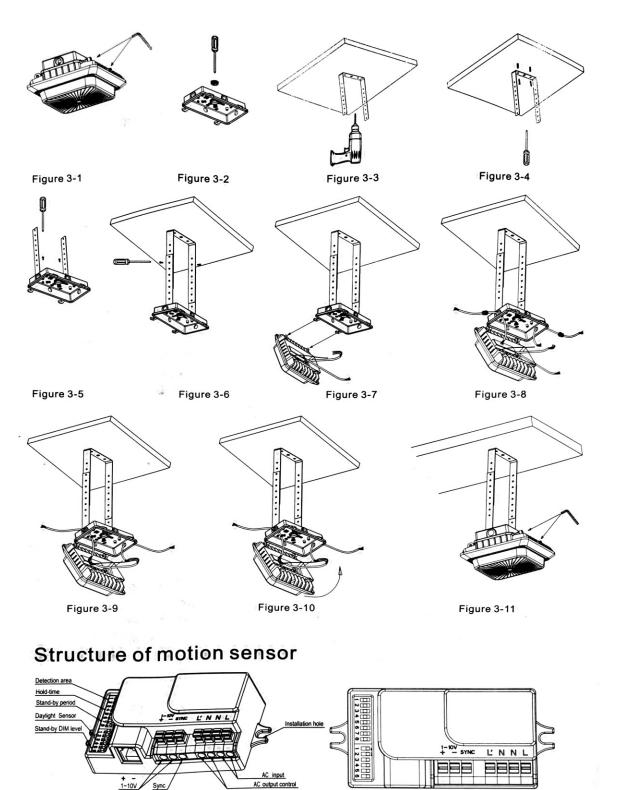

LED CANOPY LIGHTS

(866) 786-1117 • www.BeyondLEDTechnology.com







Installation

Setting:

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

		1			2		-
ON	Ι	0	N	ON		100)%
+	II	0	N	-		75	%
	III	-		C	N	50	1%
	IV	-	÷.		-	25	%
		3	4	1	5		1
	I	-	0	+			5S
	II		0	-	ON		
ON t		201		۲	_	_	0S
		ЭN	-	4	ON	-	0S
	IV	-	-	4	ON	-	nin
-	V	NC	0	N	-	20r	
-	VI	-	÷		-	+•	ω
		6	7		8	-	
	Ι	ON	0	-	ON		0S
ON t	II	-	0	N	ON	_	5S
Ė	III		-		ON ON	5r 10r	nin
	V	ON	0	N	-	30r	_
	VI	-	0	_	-		1h
	VII	-	-		-	+	∞
1		1	2	2			
ON t	I	ON	0	N	50	%	
	II	-	0	N	30	%	
	III	ON	-		20	%	
	IV	-,	-	ł	10	%	
	1 1 1	3	4		5	6	-
~	Ι	ON	0	Ν	ON	ON	
ON t	II	-	0	N	-	ON	
	III	ON	-		ON	ON	30Lux
	V		0	N	ON -	ON ON	50Lux 100Lux
	VI		-		ON	-	150Lux
	VI		t-		-	-	Disable

Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application . Factory setting: I

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Factory setting: VI

Stand-by period

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people. When set to Disable mode, the low light is maintained until motion is detected. Factory setting: I

Stand-by dimming level

The low light level you would like to have after the hold time in the long absence of people.

Factory setting: I

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

100lux, 100lux,50lux: twilight operation, 10lux, 5lux: darkness operation only. Note that daylight sensor is active only when lamp totally switches off.

Factory setting: VII

Warning / Avertissement

MIN 75°C SUPPLY CONDUCTOR


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. LES FILS D'ALIMENTATION 75°C MIN CE PRODUIT DOIT ÊTRE INSTALL É SEL ON LE CODE D'INSTALLATION

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CANOPY LIGHTS

ш

Application

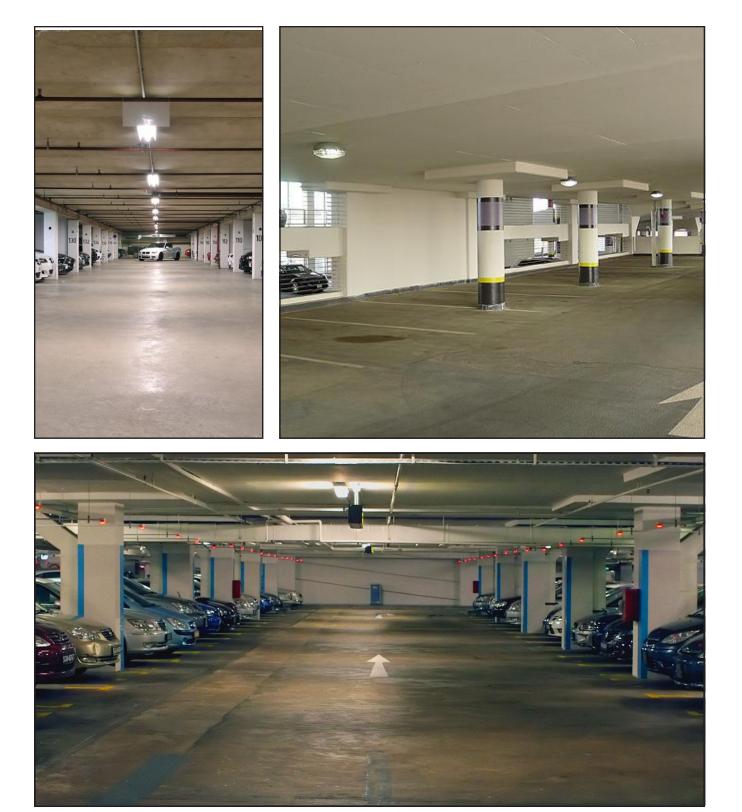

(866) 786-1117 • WWW.BeyondLEDTechnology.com Due to continuous product improvement, information in this document is subject to change.

