


WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C and to be horizontally mounted with the LEDs facing down.
- This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.
- MIN 75°C SUPPLY CONDUCTORS.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- CAUTION - RISK OF FIRE.
- This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

Installation Guide

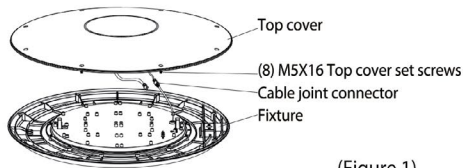


(Figure 1)

1. Remove top cover by loosening eight (8) M5X16 top cover set screws and separate the cable joint connector.

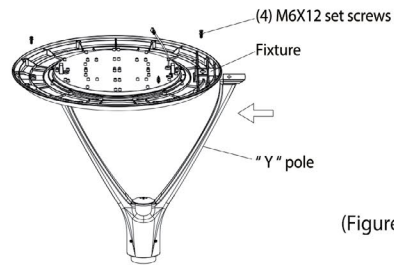


(Figure 2)

2. Push the Y-pole horizontally along the fixture track groove and secure the fixture and Y-pole with (4) M6X12 set screws.

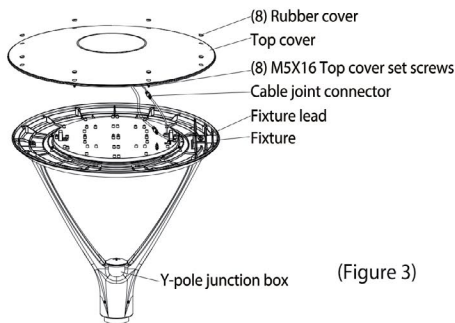


(Figure 3)

3. Connect incoming wires to fixture wires directly into the Y-pole junction box. Return top cover to its original position and secure with (8) M5X16 top cover set screws and make sure (8) rubber cover in the corresponding position.

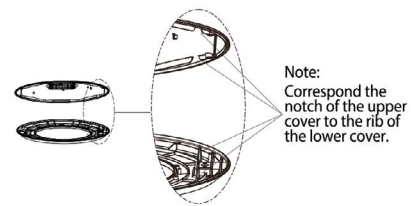

(Figure 4)



4. (1) Remove the waterproof plug and pull the fixture lead.
 (2) If using pole with 2-3/8" tenon, slipfit the fixture onto the tenon of the pole and secure it with (4) set screws. If using a pole with 3" tenon, discard the 2 3/8" pole tenon provided.
 (3) Connect wires (voltage to black, white to common, green to ground).
 (4) Once connections are completely made, carefully push all wires down into the tenon and secure it with waterproof plug.

