

CHLORIDE

by  Signify

Exit/Emergency

CMF/CNM series

Die formed steel unit, 6V, 25-100W



Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

Example: CMF25F2IC

Series/Battery	Lamp Heads*	# of Heads	IC	Options
6 V, Lead Calcium CMF25 - 25 W CMF36 - 36 W CMF50 - 50 W CMF75 - 75 W CMF100 - 100 W	6 V, Nickel Cadmium (Metal Chrome PAR 36) 6 VDC Tungsten Y - 8 W A - 18 W L - 25 W C - 30 W 6 VDC Halogen F - 6 W Q - 8 W CHY - 12 W	Blank - No Heads 1 - One 2 - Two 3 - Three ⁴ *Optional lamp heads available, consult factory or refer to lamp heads page.	IC - Intelli-Charge Diagnostics	A - Ammeter BD - Battery Disconnect Switch BM - Lamp Heads Installed on Bottom of Enclosure ² DL - UL Damp Location Listed (0°C to 40°C) EX - Special Input Transformer (specify voltage & frequency) ¹ F1 - 120 VAC Input Fuse F2 - 277 VAC Input Fuse P1 - 120 VAC Power Switch P2 - 277 VAC Power Switch SM - Lamp Heads Installed on Side of Enclosure ³ SP - Special Paint, Specify Color T - Self-Testing Diagnostics TA - Audible Self-Testing Diagnostics TD - Time Delay, 15 Minutes V - Voltmeter

Accessories⁵ (Order Separately)

ICIR - Intelli-Charge Infra-Red Remote
SSMP - Mounting Plate (25-50 W)
SMMP - Mounting Plate (75-100 W)
SKIT - Strapping Kit For Use With Mounting Plates To Affix To Columns, Poles and I-beams
WG5 - Wire Guard (25-100 W)

Footnotes

- ¹ Some option combinations may impact UL listing. Consult factory for specifics.
- ² Bottom mounted lamp heads (BM) available on 75-100 W units only.
- ³ Side mounted lamp heads (SM) are not installed onto the enclosure at the factory.
- ⁴ 75-100 W units only.
- ⁵ Consult Signify to confirm whether specific accessories are BAA-compliant.

codes and standards

- UL listed to Standard 924
- UL damp location listing option 32°F (0°C) to 104°F (40°C)
- IBC, BOCA, and OSHA illumination standard
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code)
- City of Chicago approved (CHY heads only)
- New York City approved

construction

- Enclosure is constructed of 20 gauge steel (25-50 W) or 18 gauge steel (75-100 W) with a 20 gauge cover and a white corrosion resistant, epoxy powder coat finish.
- Nine standard and custom colors available, consult factory.

installation

- Easily mounted with key hole slots or optional mounting plates.
- All housings have six available 1/2" conduit knockouts.

CMF/CNM Die formed steel unit

6V, 25-100W

electronics

- 120/277 VAC dual voltage input with surge protection is standard on all models.
- All models feature the Intelli-Charge circuit where the charging system is microprocessor driven with software embedded diagnostic routine and temperature compensation.
- All models include brownout detection, AC lockout, low voltage disconnect, AC power indicator, charge status indicator, audible user-interface controls, visual LED system fault indicator, and tactile push-to-test switch.
- Additional equipment safety features include reverse battery polarity detection and protection, and reverse utility power detection and protection.
- All models include an on-board IR receiver for use with the optional hand-held remote (ICIR).
- (optional) self-testing electronics

The diagnostic/charging platform with optional self-testing mode automatically runs a one minute self-test every 30 days and a 30 minute test on the sixth and twelfth month in accordance with NFPA 101.

A one minute or 90 minute test may be initiated via the push to test switch on the unit or by activating the appropriate test command on the optional IR test device.

options

- **A** – The ammeter option includes an analog meter electrically connected to the charging circuit for visual reference and indication of the current level being delivered to the battery.
- **BD** – The battery disconnect switch allows for the electrical switching between the battery and the connected load (lamp heads) whether they be directly mounted to the equipment or installed as remote lamp heads. The switch will be located internally to the equipment and is not made accessible other than those who perform maintenance on the equipment.
- **DL** – Damp location listed products include various levels of corrosion protection on printed circuit board assemblies and other metallic parts. Environmental testing throughout a range of ambient temperature and 88% relative humidity.
- **EX** – The special input transformer option allows for input voltage and frequencies beyond the standard 120/277 VAC, 60 Hz input.
- **F1** – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 120 VAC circuits.
- **F2** – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 277 VAC circuits.
- **P1** – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 120 VAC circuits. This option allows for opening the utility feed to the equipment for servicing or maintenance.

- operating temperature range

Standard Location: 65°F (19°C) to 85°F (30°C).

Damp Location: 32°F (0°C) to 104°F (40°C).

- power consumption

6 V lead calcium, 25-100 W units – 0.125 A (120 VAC), 0.060 A (277 VAC)

6 V NiCad, 25-50 W units – 0.159 A (120 VAC), 0.065 A (277 VAC)

6 V NiCad, 75 W units – 0.223 A (120 VAC), 0.094 A (277 VAC)

lamps

- Illumination is accomplished with two PAR 36 lamp heads mounted on the top or side of the enclosure.
- 75-100 W units can accommodate up to three lamp heads mounted directly to the top, side or bottom of the housing.

battery

- Maintenance free sealed lead calcium battery with 5 year life.
- Maintenance free sealed nickel cadmium battery with 10 year life.
- Provides a minimum of 90 minutes emergency illumination.

warranty


- Five full year warranty on electronics and unit (excluding lamps).

- **P2** – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 277 VAC circuits. This option allows for opening the utility feed to the equipment for servicing or maintenance.
- **T** – The self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display.
- **TA** – The audible self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display and an audible alarm.
- **TD** – The time delay circuit causes the emergency lighting equipment to remain under battery power for a period of 15 minutes after the utility power has been restored.
- **V** – The voltmeter option includes an analog meter electrically connected between the battery and lamp load for visual reference and indication of the battery terminal voltage when the equipment is operating in the emergency mode.

CMF/CNM Die formed steel unit

6V, 25-100W


dimensions

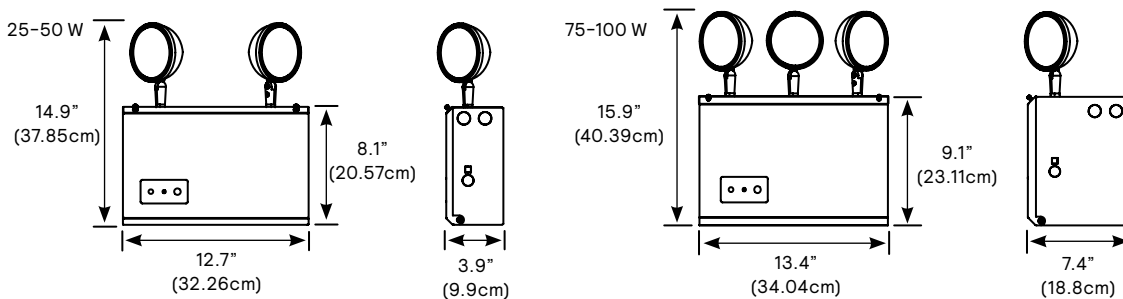

performance

Meets Life Safety Code illumination standard: average of 1.0 FC, no point less than 0.1 FC, max to min ratio of 40:1. Assumes open space with no obstructions, mounting height: 7.5' and reflectances: 80/50/20. Analysis based on independently tested photometrics.

Wall mounted 7.5' AFF, 6 V 12 W PAR 36 Halogen Lamps
1 FC Average

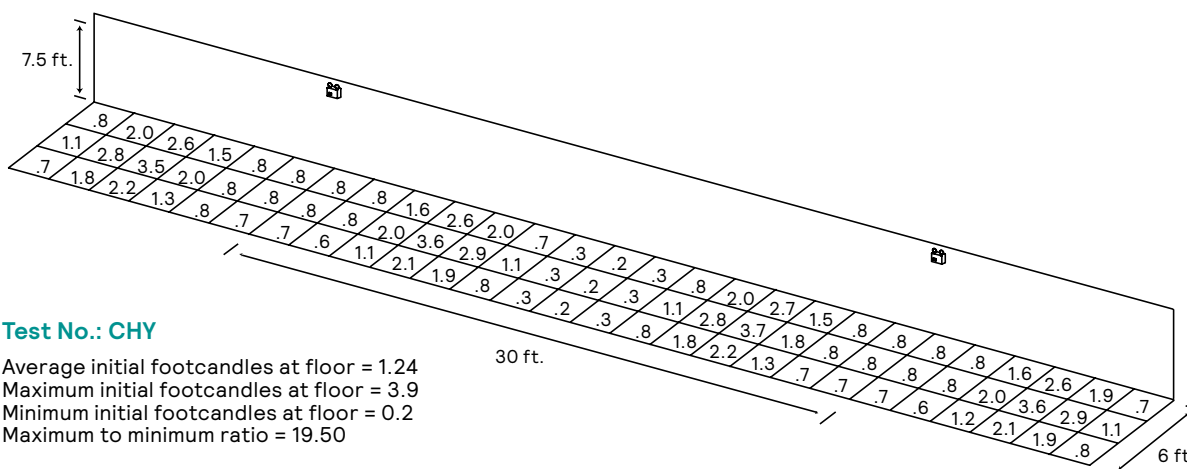

Test No.: CHY

Average initial footcandles at floor = 1.24
Maximum initial footcandles at floor = 3.9
Minimum initial footcandles at floor = 0.2
Maximum to minimum ratio = 19.50

Buy American Act of 1933 (BAA):

This product is manufactured in one of our US factories and, as of the date of this document, this product was considered a commercially available off-the-shelf (COTS) item meeting the requirements of the BAA. This BAA designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies. Prior to ordering, please visit www.signify.com/baa to view a current list of BAA-compliant products to confirm this product's current compliance.



© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
200 Franklin Square Drive,
Somerset, NJ 08873
Telephone 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.