


## Divide Surface Wavestream (Also applies to Wall Mount - Vertical and Horizontal) 4', 8', CONTINUOUS, CEILING, WALL

**WARNING:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national electrical codes and be performed by a certified electrician.


### 1. REMOVING FIXTURE FROM PACKAGING

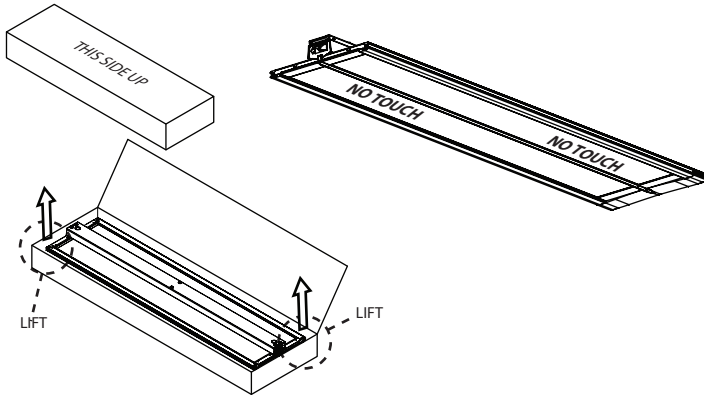

- A. Ensure "THIS SIDE UP" is visible and packaging is oriented in the designated direction.
- B. Using CLEAN work gloves, carefully lift fixture out of packaging materials while holding on to opposite ends of fixture.
- C. BLUE PROTECTIVE FILMS must remain on fixture until construction debris is no longer present.


**NOTE: AVOID CONTACT WITH LENSES**

### 2. REMOVE SURFACE BRACKET

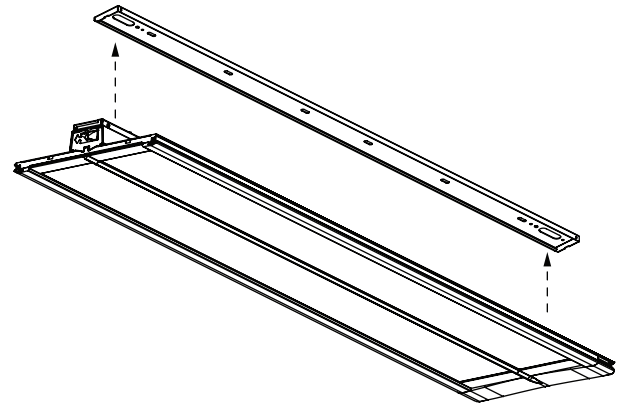

- 1. Remove SURFACE MOUNTING BRACKET from Fixture.


### 3. INSTALL SURFACE BRACKET TO CEILING

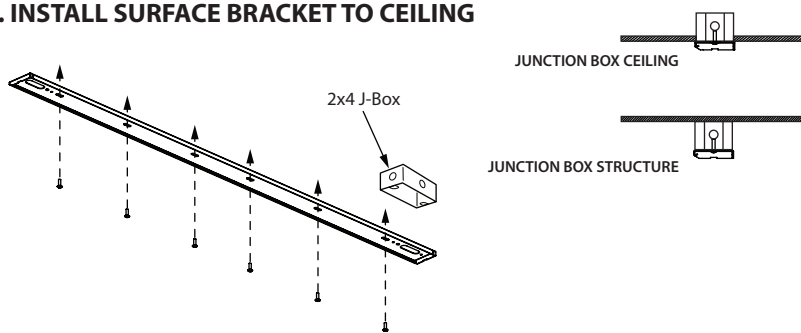

- A. Starting with J-Box located at one end, fasten the MOUNTING BRACKET to ceiling/structure (hardware by others) using all mounting holes.


**IMPORTANT NOTE:** Ceiling and Structure installation requires use of a 2"x4" Junction Box, mounted with long side parallel to fixture mounting direction.

### 4. END CAPS

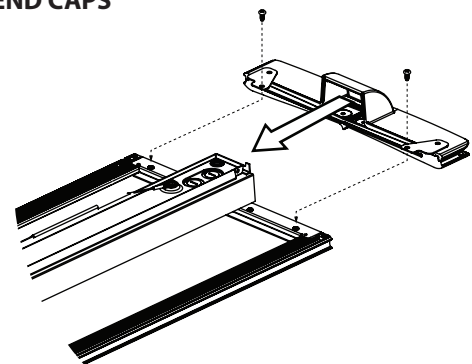


- A. Attach END CAP on FIRST and LAST fixture of continuous row.  
If a single fixture, attach end cap on both ends of fixture.

### 5. SAFETY CABLES

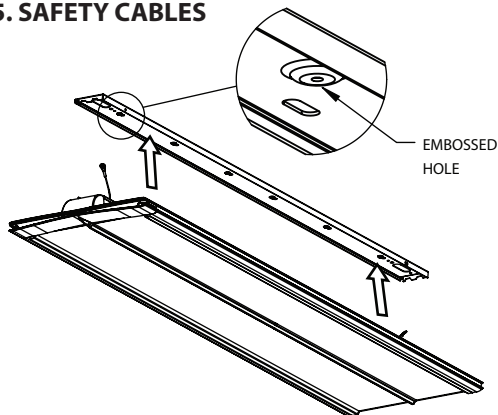

- A. Attach SAFETY CABLES to SURFACE MOUNTING BRACKET using provided hardware at embossed holes (shown).

### 6. POWER CONNECTION

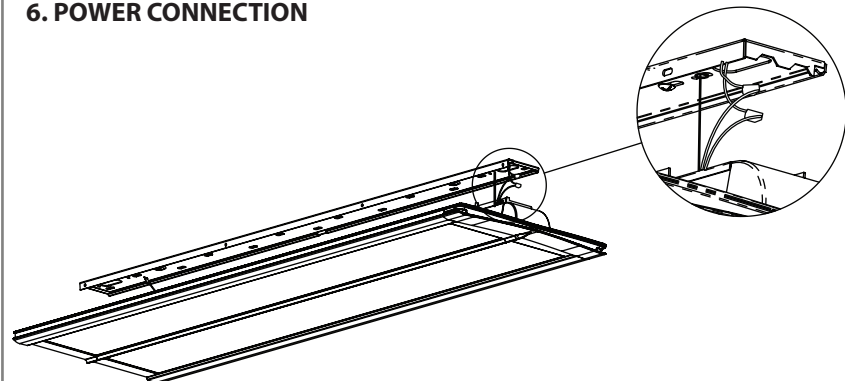


- A. Make power connections between Fixture and J-Box following all National and Local Electrical Codes.

Not all options available. Please consult your Cooper Lighting Solutions Representative for availability. Specifications and Dimensions subject to change without notice.


### Divide Surface Wavestream 4', 8', CONTINUOUS

**WARNING:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national electrical codes and be performed by a certified electrician.


#### 7. INSTALL FIXTURE TO SURFACE BRACKET

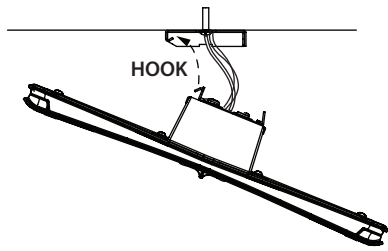

**A.** Hook fixture to MOUNTING BRACKET as shown. Make sure to feed excess power cables into ceiling.

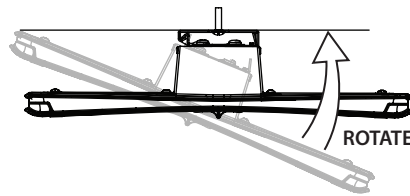


**B.** Rotate fixture to horizontal position while ensuring remaining power wires are not pinched.

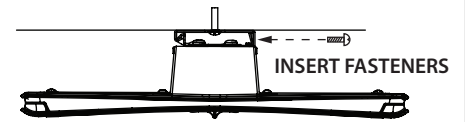


**C.** Secure fixture in position with (4x) 10-32 x 3/8" fasteners, provided.


#### 8. ROW MOUNTING

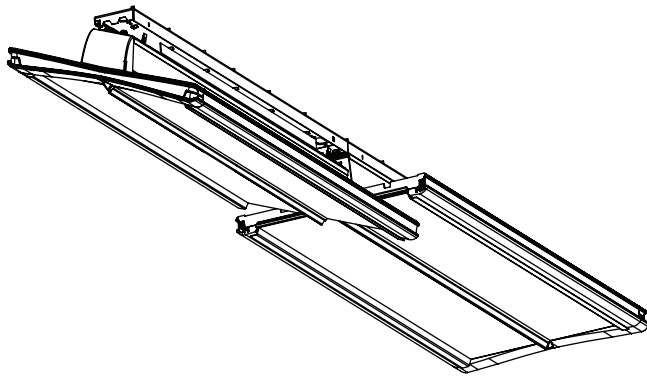


**A.** For any subsequent fixture in a continuous row, repeat the steps for fastening the mounting bracket (making sure of proper alignment), attaching safety cables, and hooking the fixture to the mounting bracket.



**B.** Once securely hooked, slide fixture away from neighboring fixture to create a gap sufficient enough to make through-wire connections.




**C.** Once through-wire connections are made, tilt the fixture to horizontal and slide fixture to close gap. Ensure that through-wires are fed into fixture while sliding so wires are not pinched or damaged. Secure fixture to mounting bracket with provided (4x) hardware.

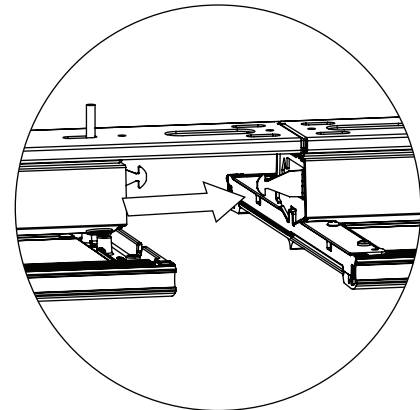

**D.** Final fixture position.

#### 9. REMOVE BLUE PROTECTIVE FILM

**A.** Remove BLUE PROTECTIVE FILM after site has been cleared of construction debris. Recycle film after removal.

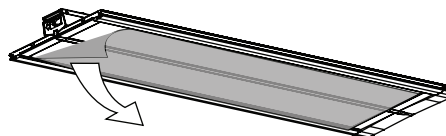

Not all options available. Please consult your Cooper Lighting Solutions Representative for availability. Specifications and Dimensions subject to change without notice.

### Divide Surface Wavestream 4', 8', CONTINUOUS

**WARNING:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national electrical codes and be performed by a certified electrician.

THIS SPACE INTENTIONALLY LEFT BLANK

#### 10. FIXTURE MAINTENANCE / CLEANING

Always follow recommended cleaning and handling procedures when cleaning the WaveStream™ lens. It can be permanently damaged if cleaned or handled improperly.

Before cleaning a WaveStream™ lens, take time to inspect the surfaces carefully in order to determine the type and severity of the contaminants. The process of cleaning the lens can result in damage to the optical surface if repeated multiple times.

For WaveStream™ lenses with multiple contaminants, the order in which they are removed can be important. For instance, if a WaveStream™ lens is contaminated with oil and dust, it is possible that wiping the oil off first will scratch the optical surface as the dust is drug along the surface by the wipe.

#### BLOWING OFF THE SURFACE OF AN OPTIC

Dust and other loose contaminants should be blown off before any other cleaning technique is employed. Using compressed air over the entire lens is recommended to prevent static buildup.

When using compressed air, hold the can upright throughout the procedure. Also, start the flow of air with the nozzle pointed away from the lens. Hold the can approximately 6" from the optic and use short bursts. Move the nozzle of the compressed air can over the optic with the nozzle at a grazing angle to the optical surface in a constant one-way direction. Due to the non-contact and solvent-free nature of this cleaning method, it should be used as a first step in cleaning all optics.

#### ADDITIONAL CLEANING METHODS

Fingerprints and large dust particles can be removed by gently wiping the surface with a clean microfiber cloth. If additional cleaning is required a mild solution of distilled water and Dawn® dish soap (between 1:20 and 1:10 parts Dawn to distilled water, respectively) could be used to wash the lens. The WaveStream™ lens should not remain wet any longer than necessary to remove the contaminants. Dry off surface with deionized air. Avoid pooling of water as that tends to leave streaks on the optical surface. This method is only recommended as a last resort as it increases the risk of damaging the lens.

**Notes:**

- Avoid any organic solvents. In addition, avoid any cleaning products including ammonia, ketones, window cleaners, or other alcohol based cleaners and solvents containing thinners, acetone, benzene and tetrachloride.

### WARNING:

RISK OF FIRE, ELECTRICAL SHOCK, CUTS AND OR OTHER CASUALTY HAZARDS. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. COOPER LIGHTING SOLUTIONS ASSUMES NO RESPONSIBILITY FOR CLAIMS BROUGHT ABOUT BY IMPROPER OR CARELESS INSTALLATION OR HANDLING OF THIS PRODUCT.

#### ATTENTION RECEIVING DEPARTMENT:

NOTE ACTUAL FIXTURE DESCRIPTION OF ANY SHORTAGE OR NOTICEABLE DAMAGE ON DELIVERY RECEIPT. FILE CLAIM FOR COMMON CARRIER (LTL) DIRECTLY WITH CARRIER. CLAIMS FOR CONCEALED DAMAGE MUST BE FILED WITHIN 15 DAYS OF DELIVERY. ALL DAMAGED MATERIAL, COMPLETE WITH ORIGINAL PACKING MUST BE RETAINED



**Edges may cut.  
Handle with care**




**Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.**



**Risk of Fire and Electric Shock. If not qualified, consult an electrician.**

**NOTICE: GREEN GROUND SCREW PROVIDED IN PROPER LOCATION. DO NOT RELOCATE**

**NOTICE: IF SUPPLY WIRES ARE LOCATED WITHIN 3 INCHES OF BALLAST, USE WIRE RATED FOR AT LEAST 90°C (194°F).**



Not all options available. Please consult your Cooper Lighting Solutions Representative for availability. Specifications and Dimensions subject to change without notice.