




Assembly Instruction for 1972 RB

Use drawing 1 for reference

1. Slip loop (1) along wire and thread onto nipple (A) on the top of roof (2).
2. Take main cage assembly (4) on mount it to the roof (2) by slipping studs (C) through the holes (B) in the roof (2). Then thread ball knob (3) onto exposed end of stud (C).
3. Fixture can be lamped through the bottom of the main cage assembly (4). Please Note: Maximum wattage for this fixture is 100 watts.


Fixture is ready for hanging.
Please follow the mounting instructions on the back of this instruction sheet.

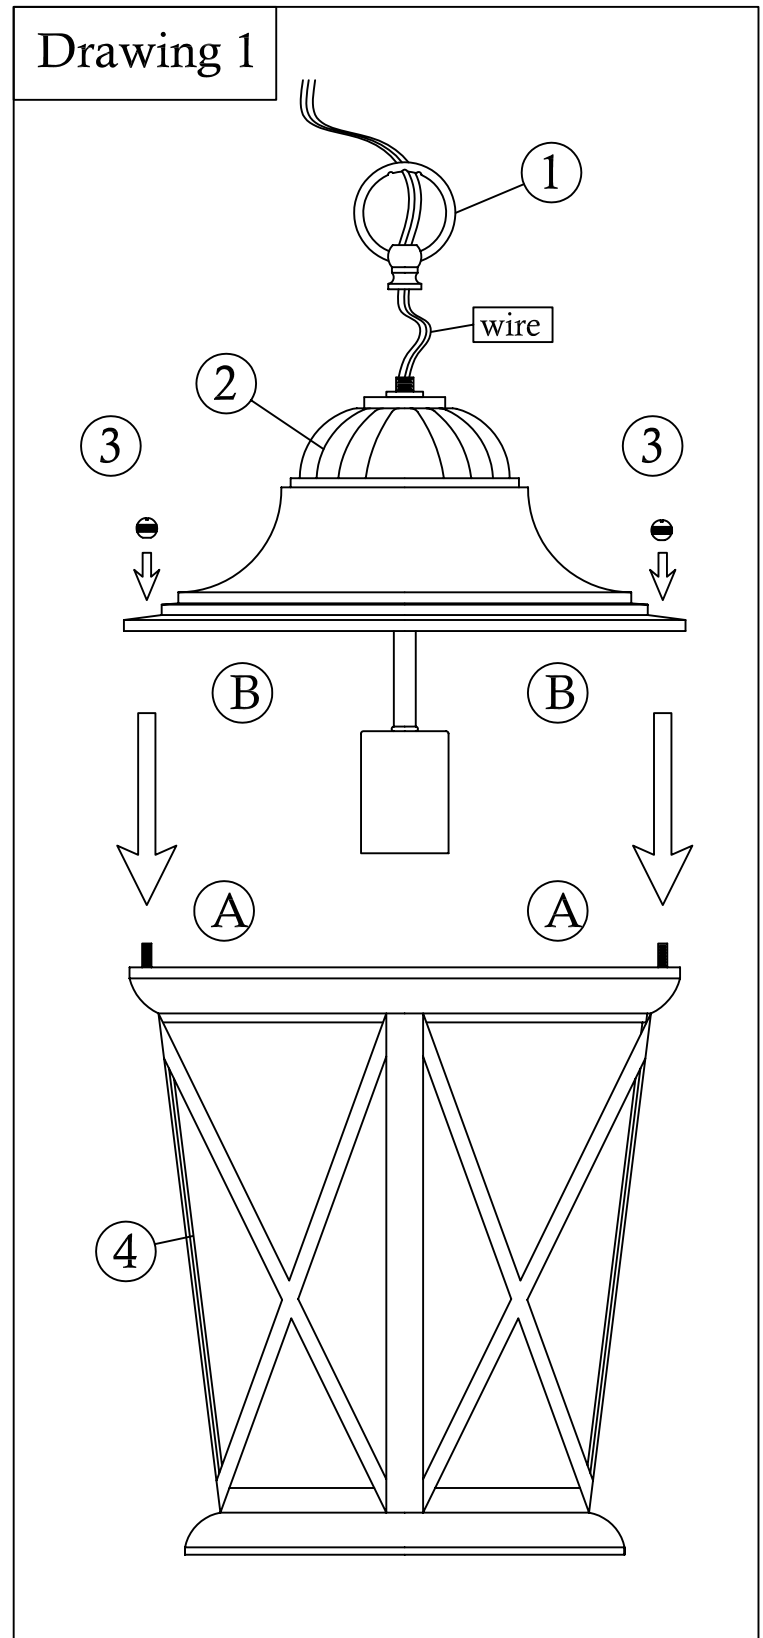

Mounting Instructions for 1972 RB

Mounting instructions

1. Shut current off before starting. If the fixture you are replacing is turned on and off by a wall switch, simply turn the switch off. If not, remove the appropriate fuse (or open the circuit breakers) until the fixture is dead. Do not restore current - either by fuse, breaker or switch - until the new fixture is completely wired and in place.
2. Fasten mounting strap (1) to outlet box (A) with the original outlet box screws (2).
3. Thread nipple (3) in to the mounting strap (1), as illustrated.
4. Thread loop (4) on to end of nipple (3).
5. Slip canopy (B) over loop (4) and adjust height of loop so half of thread area is exposed. (see Drawing 3 below)
6. Taking the chain, determine the length you require, and attach one end of the chain to the fixture. Now slip loop collar (4A) and canopy (B) onto chain.
7. Now attach other end of chain to loop (4). Please get assistance during this step. Since fixture may be heavy and difficult to hold while attaching chain.
8. Unwrap supply wire and ground wire and weave them up through the chain. Then slip supply wire and ground wire through center of loop (4).
9. Connect ground wire to mounting strap (1) using green ground screw (5).
10. Now connect outlet box wires to fixture leads. Important: connect white outlet box wire (6) to ribbed or white fixture lead (6A). Then connect black or red outlet box wire (7) to smooth or black fixture lead (7A).
11. Slip canopy up firmly against the ceiling, and secure by turning the threaded collar (4A) on loop (4) until tight.

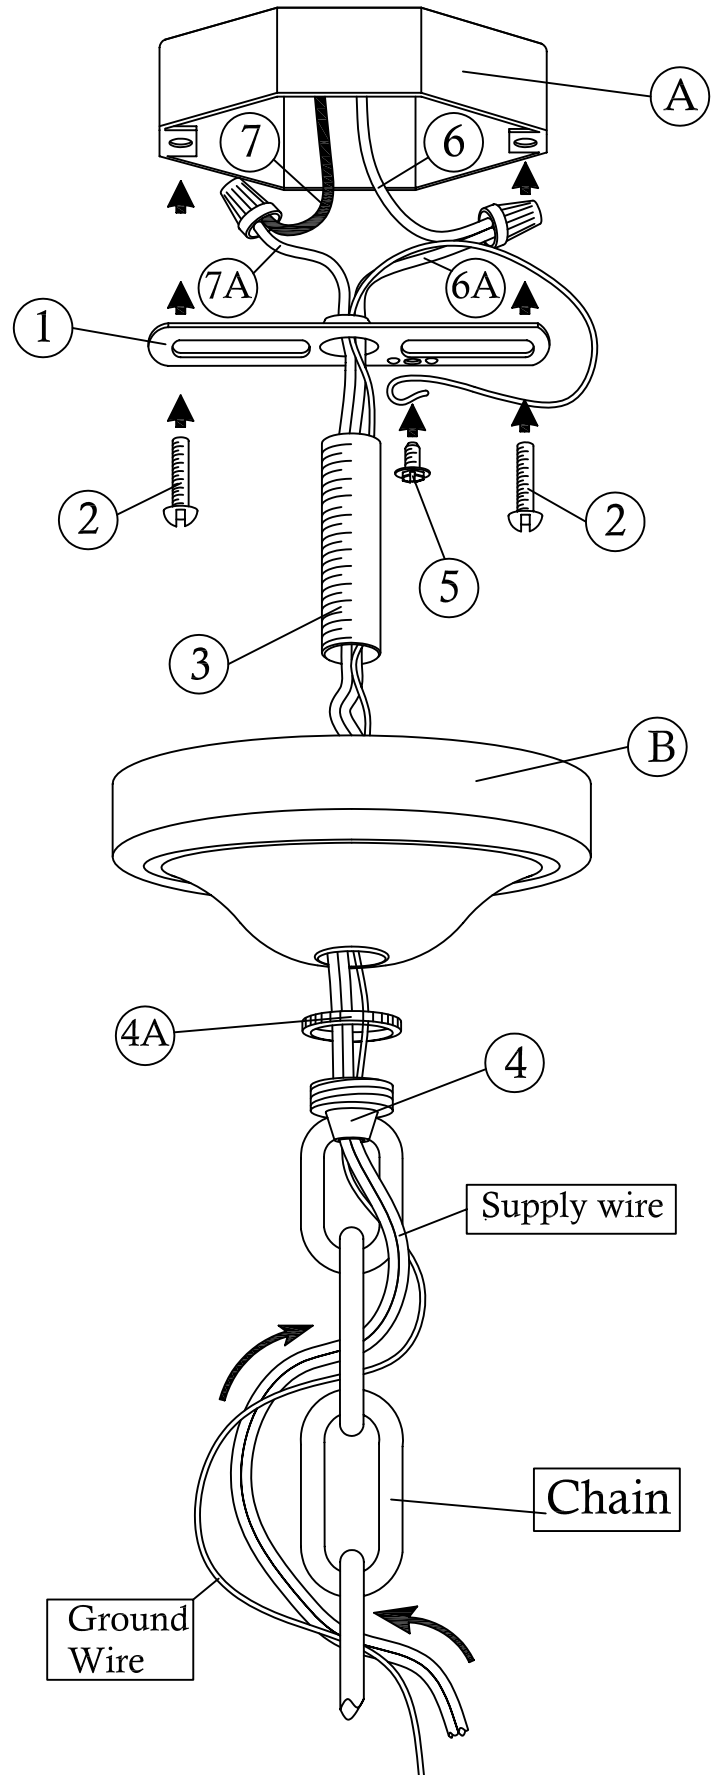

Drawing 3

half of thread area of loop (4) is to be exposed. This will allow collar (4A) to be threaded on later.

