

PROJECT:


TYPE:

SOURCE:

NOTES:


PURELED SPECIFICATIONS (E CULUSTED LISTED

Cree XHP-50-2 Plug and Play field replaceable LED board
600 Lumens @ 1050mA (6 watts), 420 Lumens @ 700mA (4 watts), 240 Lumens @ 350mA (2 watts), delivered from luminaire with unobstructed beam.
100 Lumens minimum @ 6 watts, delivered from luminaire with unobstructed beam
90+
2700K, 3000K, 4000K
15, 25, 38, 60
IP66
Electronics = 5 years Body Cop/ SS = 10 years Body Aluminium = 5 years
AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No. 250.7, No. 250.0-08 CE

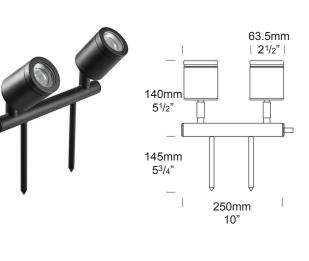

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

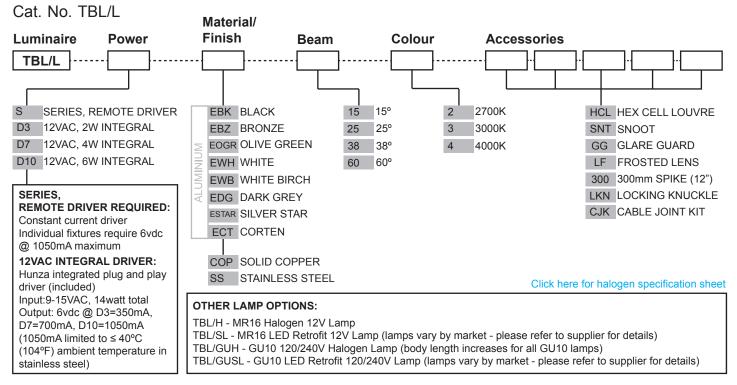

Click for here Remote Power Supply Guidance Charts



LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: high corrosion resistant 63.5mm (21/2") x 10mm (3/8") aluminium.

End cap: solid aluminium 63.5mm (21/2") rod, with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Copper:

Body: 63.5mm (21/2") x 10mm (3/8"). End cap: solid copper 63.5mm (21/2") rod.

316 Stainless Steel:

Body: 63.5mm (21/2") x 10mm (3/8"). End cap: solid 316 stainless steel 63.5 (21/2") rod

ACCESSORIES

Knuckles:

Aluminium and Copper luminaires - 360° rotation and 0-90° elevation, solid brass with anti rust spring. Stainless Steel luminaires - 360° rotation and

0-90° elevation, full stainless steel construction.

Step Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass. Lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Cable:


Water resistant rubber with HUNZA[™] Anti-Syphon[™] barrier system.

Mounting:

Ground spike 150mm (6") or 300mm (12") inserted directly into the earth.

Luminaire Weight:


Alum: 0.800kg (1lb 12oz) Cop: 1.700kg (3lb 12oz) SS: 1.600kg (3lb 8oz)

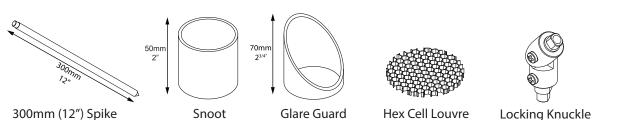


BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: hunzalighting.com/downloads

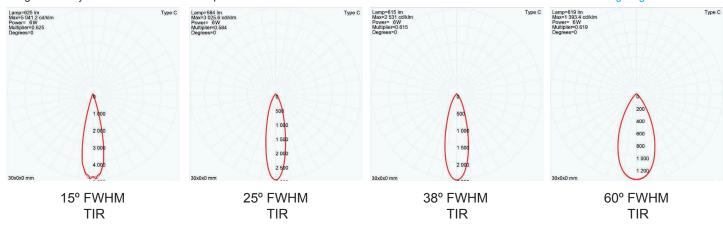


WIRING GUIDE

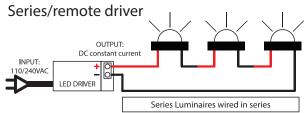

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: hunzalighting.com/downloads

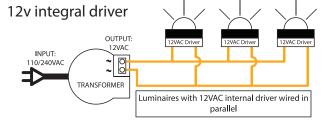

PURE OUTDOOR LIGHTING HUNZA

HUNZA FACTORY Saint Johns Auckland 1072 New Zealand

130 Felton Mathew Ave

Ph: +64-9-528 9471 Fax: +64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com

Aug 2017 Specifications may change without notification INTERNATIONAL CONTACTS:

http://www.hunzalighting.com/contact.php This document contains proprietary information of Hunza. Its receipt or po not convey any rights to reproduce or disclose its content.