

IS-L3RP Lytecaster 3.75" Accent Replacement Optics

Read and understand these instructions before installing luminaire.

This luminaire is intended for installation in accordance with the National Electrical Code and Local Regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at breaker box before proceeding.

Retain these instructions for maintenance reference.

CAUTION: Only for use with L308 Series Finishing Sections provided by Philips Lightolier.

CAUTION: Use only L3 series Accessory Films, Trim Sections, Finishing Sections and Rough-In Sections provided by Philips Lightolier. Use of other manufacturers products voids the Underwriters Laboratories listing and could constitute a fire hazard.

CAUTION: To avoid product failure, disconnect power at supply prior to connecting or disconnecting Finishing Section to/from Rough-In Section.

Items needed for the installation:

1. L3RP Series Replacement Optic
2. Small Phillips Screwdriver

Installing Replacement Optic into Finishing Section - Step A:


1. Pull Down to Remove Trim Section from ceiling and disconnect Trim Section wire harness from Rough-In Section wire harness. See IS-L3 for further removal & installation instructions.
2. Remove Finishing Section from Trim Section as shown in (fig. 1a). Upon re-installation, if the Trim Section has a mounting spring with a semi-circular cutout, make a note to orient the heat sink on the Finishing Section in relation to the mounting spring as shown in (fig 1a). If neither mounting spring has a semi-circular cutout, the Finishing Section can be re-mounted in either orientation.
3. If present, remove Accessory Holder by pulling off from Finishing Section. Retain Film if present.

Installing Replacement Optic into Finishing Section - Step B:

1. Remove two phillips screws from existing Finishing Section and remove Optic from heatsink as shown in (fig. 2a)
2. Install new Optic onto heatsink with existing phillips screws or new ones provided. Do not touch LED, pull or pinch wires (fig. 2a). Make sure to adequately tighten screws.
3. Re-install Accessory Holder and Film onto Finishing section if present (fig. 1b) and then re-install Finishing Section as shown in (fig. 1a).

Installing Completed Finishing Section & Trim Section into Rough-In Section:

See instruction sheet IS-L3 that comes with all L3 Series Trim Sections.

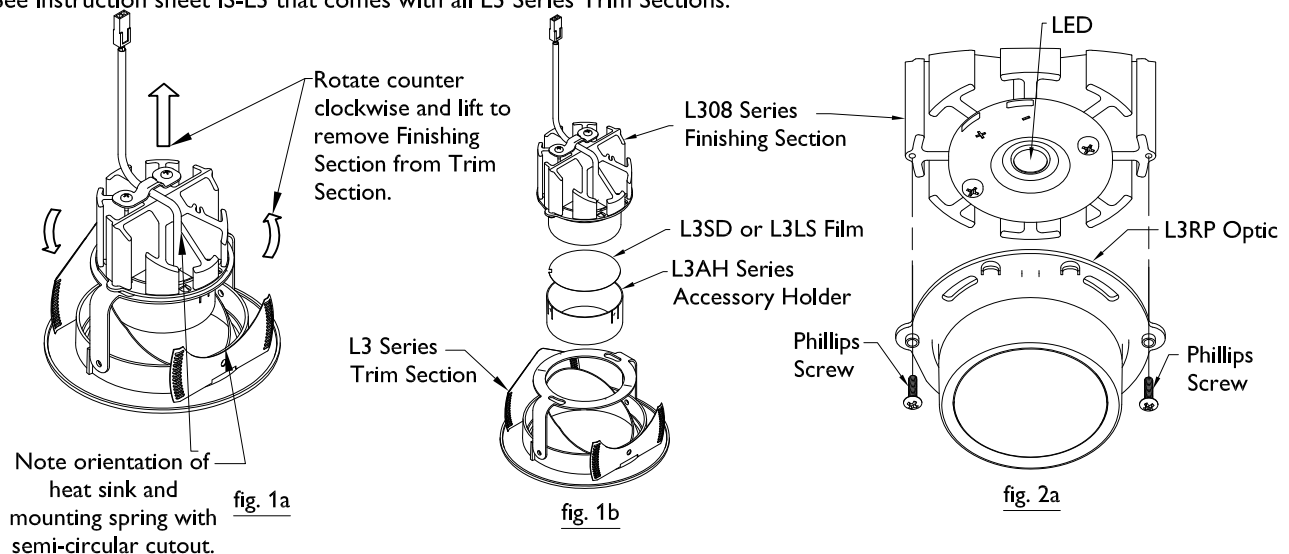

IS-L3RP Lytecaster Optiques de rechange d'accentuation 3,75 po

Veillez lire attentivement et bien comprendre ces instructions avant l'installation.

Ce luminaire est prévu pour une installation conforme au National Electrical Code (NEC) et aux réglementations locales applicables. Pour assurer une entière conformité aux codes et réglementations locaux, veuillez contacter un inspecteur en électricité avant de procéder à l'installation. Pour prévenir un choc électrique, couper l'électricité au coffret de fusibles ou au disjoncteur avant de procéder.

Conserver ces instructions comme référence pour l'entretien

MISE EN GARDE : Utiliser avec les sections de finition série L308 par Philips Lightolier seulement.

MISE EN GARDE : Utiliser avec les pellicules accessoires, sections garnitures, sections de finition et cadres de montage série L3 par Philips Lightolier seulement. L'usage de produits de tout autre fabricant annule l'homologation par Underwriters Laboratories et pourrait poser un risque d'incendie.

MISE EN GARDE : Pour éviter une défaillance du produit, débrancher le courant d'alimentation avant le raccordement/déconnexion de la section de finition à/de la section cadre de montage.

Articles requis pour l'installation :

1. Optique de rechange série L3RP
2. Petit tournevis Phillips.

Installation de l'optique de rechange dans la section de finition - Étape A :

1. Retirer vers le bas la section garniture du plafond et débrancher le faisceau de câblage de la section garniture de celui de la section cadre de montage. Se reporter à IS-L3 pour d'autres instructions sur le retrait et l'installation.
2. Retirer la section de finition de la section garniture (vig. 1a). Pour réinstaller, si la section garniture est dotée d'un ressort de montage à découpe semi-circulaire, s'assurer de réorienter le dissipateur thermique sur la section de finition par rapport au ressort de montage (vig. 1a). Si aucun ressort de montage n'est doté d'une découpe semi-circulaire, la section de finition peut être réinstallée dans un sens ou l'autre.
3. S'il y a lieu, enlever le porte-accessoires, le dégager de la section de finition. Conserver la pellicule s'il y en a une.

Installation de l'optique de rechange dans la section de finition - Étape B :

1. Enlever les deux vis Phillips de la section de finition existante et l'optique du dissipateur thermique comme ci-dessous (vig. 2a).
2. Installer l'optique de rechange sur le dissipateur thermique avec les vis Phillips existantes ou les nouvelles vis fournies. Ne pas toucher à la source DEL, tirer ou coincer les fils (vig. 2a). S'assurer de serrer adéquatement les vis.
3. Réinstaller le porte-accessoires et la pellicule sur la section de finition s'il y a lieu (vig. 1b), puis réinstaller la section de finition comme ci-dessous (vig. 1a).

Installation des sections de finition et garniture dans la section cadre de montage :

Se reporter aux instructions IS-L3 fournies avec toutes les sections garnitures série L3.

