
Livestock Scales Aluminium Platform Construction Guide

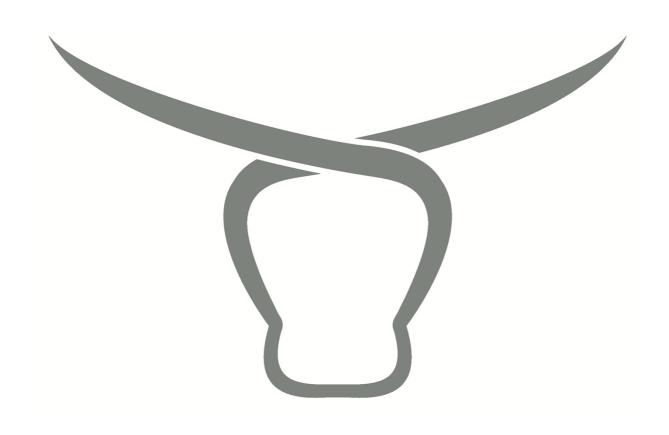

Aluminium Platform

This is our recommended platform construction as the total weight of the platform is less than 35kg for 2000mm x 700mm in size (standard crush dimensions)

An Aluminium platform can be quickly built by your local fabrication / engineering company with the following guidance:

Aluminium materials required (marine grade): listed below

50 x 50 x 5mm Angle (platform edges) 50 x 50 x 5mm RHS Square Tube (platform spine) 6mm aluminium tread diamond plate on top of frame 15 x 200 x 60mm drilled and tapped plates (4) for the (4) load cells

Take the measurements for the platform size you need (to comfortably fit your crush) along with the images below and a local welder / fabricator and they will be able to build you a light weight, low profile super strong Aluminium platform that will be strong and rigid.

Ensure when measuring the crush internal dimensions, you open and close all access doors and observe any obstructions that may cause problems when attempting to install the platform and load cells / load bars.

Allow a 5 to 10 mm gap between the edge of the platform and the edge of the crush so you have plenty of room to move when installing the platform and for opening access doors etc


Aluminium is the recommended material (marine grade) for platform construction as it will be lightweight and able support the max weight requirements for general livestock weighing.

Lightweight, Low Profile, Heavy Duty – Aluminium Platform Design



50mm Angle, 50mm Square Tube with 6mm Diamond Tread
Less than 35 kg total weight

Platform Design for Scales Kit (4 x steel feet)

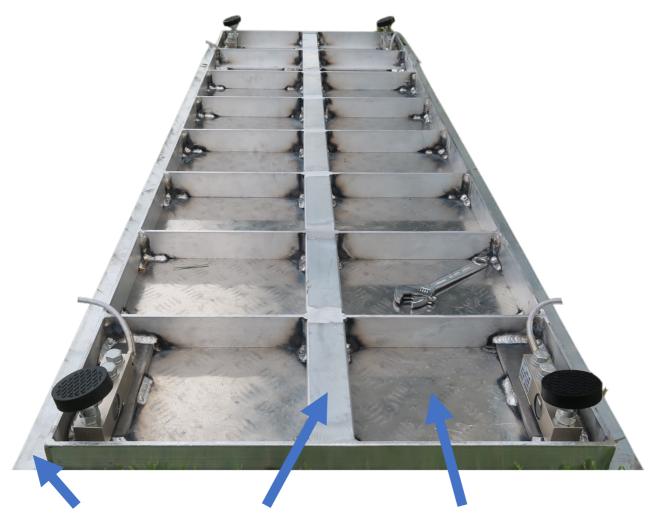

50mm Angle, 50mm Square Tube with 6mm Diamond Tread


200 x 60 x 15mm drilled and tapped plates for the load cells



Add the provided Spacer and bolts to secure load cells



Ensure a good clearance gap is maintained (at least 2mm)

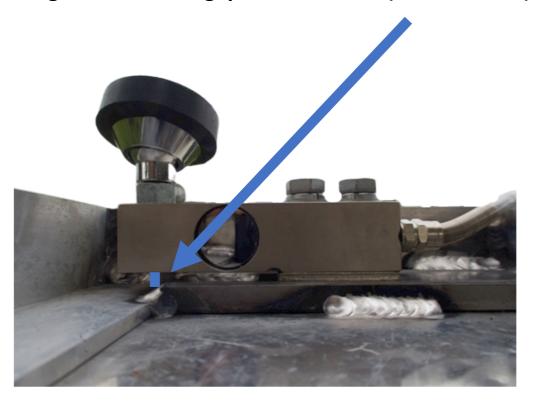


Construction of Platform for Load Bars


Add 2 x 6mm Aluminium Plates




Drill holes into the 6mm plates to secure platform

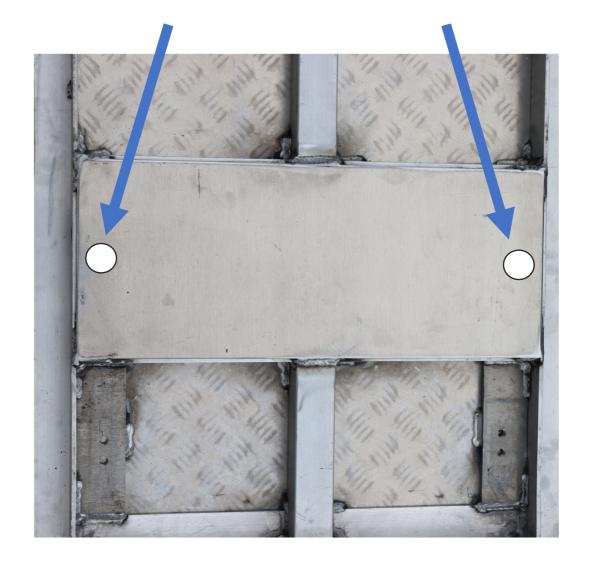

Preparing the Load Bars for Platform Installation

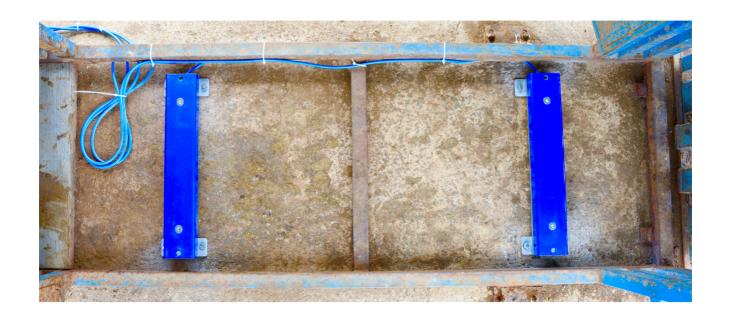

When attaching the platform <u>ensure</u> the floating top section is not damaged when tightening the bolts

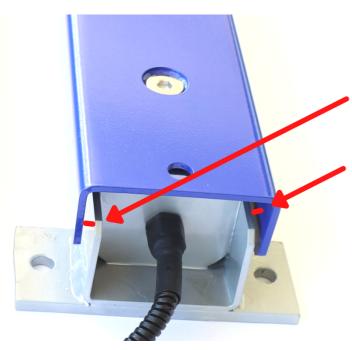

A gap of at least 5mm must be maintained between the floating top section and the main structure for the load bars to work correctly

Platform size – 2000mm x 700mm (35kg)



Aluminium Platform Secured in Position

