

# INSTALLATION AND ASSEMBLY INSTRUCTIONS

## LXL/LDL2 SERIES LED LINEAR LUMINAIRE



Listed to UL2108 & UL8750  
LED Luminaire,  
Suitable for Damp Locations

**WARNING:** Risk of fire or electrical shock. Disconnect power before installing or servicing.


**CAUTION:** To prevent the risk of fire, do not install closer than 0 inches to cabinet wall or in a compartment smaller than 18.5 inches by 1 inches by 12 inches.

**IMPORTANT:** Use with LSI Industries Inc. RB3 or PSE series Power Supplies ONLY!

- For under-cabinet or shelf mount.
- For Damp Locations.
- Not for use with dimmer.

1. If supplied, reference layout drawing for LED strip placement.
2. Lay out LED strips to desired lit areas, using the appropriate length LED strip. Ensure each LED strip leads can reach Power Supply or next LED strip. Ensure Quick Connects match up (Male to Female ONLY).

**WARNING-IMPROPER CONNECTION  
WILL RESULT IN FIXTURE FAILURE!**

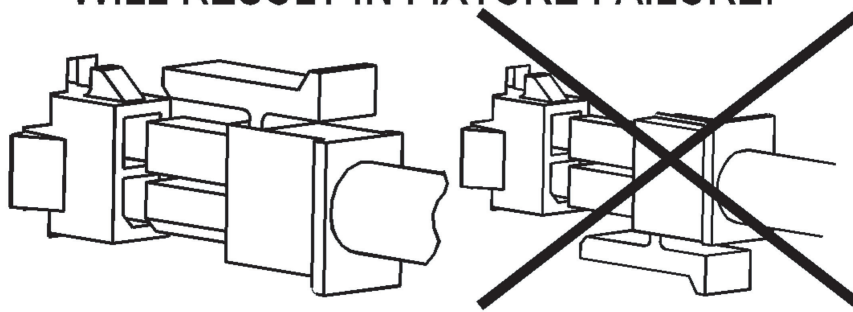

3. LED strips are quick-connected together in the following MAXIMUM lengths:

	LXL	LDL2
PSE 40	4.5'	6.5'
PSE 100	11.5'	16'
RB3 100	11.5'	16'

4. Install strip to desired surface using suitable fasteners (not supplied).

**NOTE: Holes on LED strips accommodate #10 screws.**



A Company with a Smart Vision

LSI Industries Inc. 10000 Alliance Road Cincinnati, Ohio 45242 (513) 793-3200 Fax (513) 793-0147 www.lsi-industries.com

356468 Rev. 10/10

P 1 of 1

©2010 LSI Industries Inc.

### Installation Questions?

Call LSI Field Service Department at:  
1-800-436-7800 Ext. 3300  
Fax: 1-877-861-1368