

Project		Catalog #		Type	
Prepared by		Notes		Date	



# McGraw-Edison

## GPC Galleon Pedestrian Companion

Area / Site Luminaire

### Product Features



### Product Certifications




### Interactive Menu

- Ordering Information [page 2](#)
- Product Specifications [page 2](#)
- Optical Configurations [page 3](#)
- Energy and Performance Data [page 4](#)
- Control Options [page 6](#)


### Quick Facts

- Choice of sixteen high-efficiency, patented AccuLED Optics
- Quick mount pole or mast-arm mounting configurations
- Eight lumen packages from 3,215 up to 17,056 lumens
- IP66 rated housing and LED light squares


### Dimensional Details

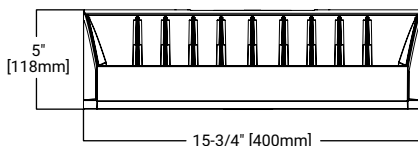


Mast Arm Mount

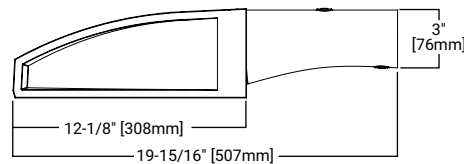

Quick Mount Arm

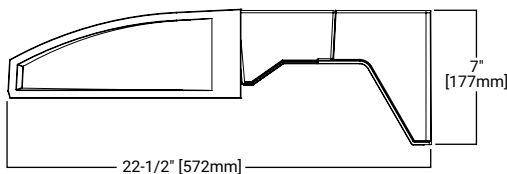

Quick Mount Arm (Pole Mounting Details)

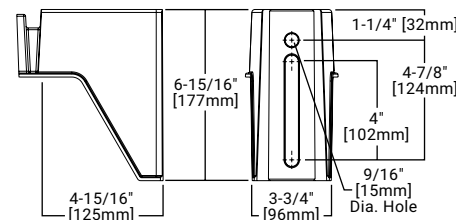

**NOTES:**

1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.

Ordering Information

SAMPLE NUMBER: GPC-SA2C-740-U-T4FT-GM

Product Family	Light Engine		Color Temperature	Voltage	Distribution	Mounting Options	Finish
	Configuration	Drive Current					
<b>GPC</b> =Galleon Pedestrian Companion <b>BAA-GPC</b> =Galleon Pedestrian Companion, Buy American Act Compliant <sup>34</sup> <b>TAA-GPC</b> =Galleon Pedestrian Companion, Trade Agreements Act Compliant <sup>34</sup>	<b>SA1</b> =1 Square <b>SA2</b> =2 Squares <sup>2</sup>	<b>A</b> =615mA <b>B</b> =800mA <b>C</b> =1000mA <b>D</b> =1200mA <sup>4</sup>	<b>722</b> =70CRI, 2200K <b>727</b> =70CRI, 2700K <b>730</b> =70CRI, 3000K <b>735</b> =70CRI, 3500K <b>740</b> =70CRI, 4000K <b>750</b> =70CRI, 5000K <b>760</b> =70CRI, 6000K <b>827</b> =80CRI, 2700K <b>830</b> =80CRI, 3000K <b>AMB</b> =Amber, 590nm <sup>3,4</sup>	<b>U</b> =120-277V 1=120V 2=208V 3=240V 4=277V 8=480V <sup>6,7</sup> 9=347V <sup>6</sup> <b>DV</b> =277-480V DuraVolt Drivers <sup>7,8,36</sup>	<b>TT2</b> =Type II <b>T2R</b> =Type II Roadway <b>T3</b> =Type III <b>T3R</b> =Type III Roadway <b>T4FT</b> =Type IV Forward Throw <b>T4W</b> =Type IV Wide <b>SL2</b> =Type II w/Spill Control <b>SL3</b> =Type III w/Spill Control <b>SL4</b> =Type IV w/Spill Control <b>SLL</b> =90° Spill Light Eliminator Left <b>SLR</b> =90° Spill Light Eliminator Right <b>RW</b> =Rectangular Wide Type I <b>SNQ</b> =Type V Square Narrow <b>5MQ</b> =Type V Square Medium <b>5WQ</b> =Type V Square Wide <b>AFL</b> =Automotive Frontline	<b>QM</b> =Quick Mount Arm for Round or Square Pole <sup>2,13</sup> <b>MA</b> =2-3/8" Mast Arm <sup>2,14</sup>	<b>AP</b> =Grey <b>BZ</b> =Bronze <b>BK</b> =Black <b>DP</b> =Dark Platinum <b>GM</b> =Graphite Metallic <b>WH</b> =White
Options (Add as Suffix) <sup>1</sup>			Controls and Systems Options (Add as Suffix)		Accessories (Order Separately) <sup>35</sup>		
<b>F</b> =Single Fused (120, 277 or 347V. Must Specify Voltage) <b>FF</b> =Double Fused (208, 240 or 480V. Must Specify Voltage) <b>10K</b> =10kV Surge Module <b>20K</b> =20kV UL 1449 Fused Surge Protective Device <b>DIM</b> =External 0-10V Dimming Leads <sup>9,19</sup> <b>L90</b> =Optics Rotated 90° Left <b>R90</b> =Optics Rotated 90° Right <b>HSS</b> =Factory Installed House Side Shield <sup>23</sup> <b>GRSBK</b> =Factory Installed Glare Shield, BK <sup>4,27</sup> <b>GRSWH</b> =Factory Installed Glare Shield, WH <sup>4,27</sup> <b>UPL</b> =Uplight Housing <sup>13</sup> <b>HA</b> =50°C High Ambient <sup>12</sup> <b>LCF</b> =Light Square Trim Plate Painted to Match Housing <sup>22</sup> <b>MT</b> =Factory Installed Mesh Top <b>CC</b> =Coastal Construction finish <sup>5</sup> <b>CE</b> =CE Marking and Small Terminal Block <sup>24</sup> <b>AHD145</b> =After Hours Dim, 5 Hours <sup>16</sup> <b>AHD245</b> =After Hours Dim, 6 Hours <sup>16</sup> <b>AHD255</b> =After Hours Dim, 7 Hours <sup>16</sup> <b>AHD355</b> =After Hours Dim, 8 Hours <sup>16</sup> <b>DALI</b> =DALI Driver <sup>11</sup>			<b>BPC</b> =Button Type Photocontrol (120, 208, 240 or 277V. Must Specify Voltage) <b>PR</b> =NEMA 3-PIN Twistlock Photocontrol Receptacle <b>PR7</b> =NEMA 7-PIN Twistlock Photocontrol Receptacle <sup>15</sup> <b>SPB1</b> =Dimming Occupancy Sensor with Bluetooth Interface, <8' Mounting <sup>19,33</sup> <b>SPB2</b> =Dimming Occupancy Sensor with Bluetooth Interface, 8'-20' Mounting <sup>19,33</sup> <b>SPB4</b> =Dimming Occupancy Sensor with Bluetooth Interface, 21'-40' Mounting <sup>19,33</sup> <b>MS-LXX</b> =Motion Sensor for On/Off Operation <sup>17,18,19</sup> <b>MS/DIM-LXX</b> =Motion Sensor for Dimming Operation <sup>17,18,19</sup> <b>ZW</b> =WaveLinx-enabled 4-PIN Twistlock Receptacle <sup>29,30</sup> <b>ZD</b> =WaveLinx Module with DALI driver and 4-PIN Receptacle <sup>29,30</sup> <b>SWPD4XX</b> =WaveLinx Sensor Only, 7'-15' <sup>31,32</sup> <b>SWPD5XX</b> =WaveLinx Sensor Only, 15'-40' <sup>31,32</sup> <b>WOBXX</b> =WaveLinx Sensor with Bluetooth, 7'-15' <sup>31,32</sup> <b>WOFXX</b> =WaveLinx Sensor with Bluetooth, 15'-40' <sup>31,32</sup> <b>LWR-LW</b> =Enlighted Wireless Sensor, Wide Lens for 8'-16' Mounting Height <sup>18,20,21</sup> <b>LWR-LN</b> =Enlighted Wireless Sensor, Narrow Lens for 16'-40' Mounting Height <sup>18,20,21</sup>		<b>QA/RA1013</b> =Photocontrol Shorting Cap <sup>28</sup> <b>QA/RA1016</b> =NEMA Photocontrol - Multi-Tap 105-285V <sup>28</sup> <b>QA/RA1201</b> =NEMA Photocontrol - 347V <sup>28</sup> <b>QA/RA1027</b> =NEMA Photocontrol - 480V <sup>28</sup> <b>MA1252</b> =10kV Circuit Module Replacement <b>MA1059XX</b> =Thru-branch Back Box (Must Specify Color) <b>LS/HSS</b> =Field Installed House Side Shield <sup>23,25</sup> <b>LS/GRSBK</b> =Glare Shield, Black <sup>8,25,27</sup> <b>LS/GRSWH</b> =Glare Shield, White <sup>8,25,27</sup> <b>LS/PFS</b> =Perimeter Shield, Black <b>FSIR-100</b> =Wireless Configuration Tool for Occupancy Sensor <sup>17</sup> <b>WOLC-7P-10A</b> =WaveLinx Outdoor Control Module (7-pin) <sup>26,29</sup> <b>SWPD4-XX</b> =WaveLinx Wireless Sensor, 7' - 15' Mounting Height <sup>29,30,31,32</sup> <b>SWPD5-XX</b> =WaveLinx Wireless Sensor, 15' - 40' Mounting Height <sup>29,30,31,32</sup>		
<p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>DesignLight Consortium® Qualified. Refer to www.designlights.org, Qualified Products List under Family Models for details.</li> <li>Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional information</li> <li>Narrow-band 590nm +/- 5nm for wildlife and observatory use. Choose drive current A; supplied at 500mA drive current only. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option.</li> <li>Not available with HA option.</li> <li>Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654.</li> <li>Require the use of a step down transformer. Not available in combination with sensor options at 1200mA.</li> <li>480V not to be used with ungrounded or impedance grounded systems.</li> <li>DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit <a href="http://www.signify.com/duravolt">www.signify.com/duravolt</a> for more information.</li> <li>Cannot be used with other control options.</li> <li>Low voltage control leads extended 18" from fixture.</li> <li>Not available in 1200mA. When used with CBP or HA options, only available with single light square.</li> <li>Not available in 1200mA, UPL or CBP options. Available with single light square.</li> <li>Quick mount arm adapter is factory installed. Pole mounting bracket shipped in box. Suitable for 1.5G. Fits square and round poles up to 6" O.D.</li> <li>Mast arm adapter factory installed (2-3/8" O.D. arm only). Suitable for 3G vibration.</li> <li>Compatible with standard 3-PIN photocontrols, 5-PIN or 7-PIN ANSI controls.</li> <li>Requires the use of BPC photocontrol or the PR7 or PR photocontrol receptacle with photocontrol accessory. See After Hours Dim supplemental guide for additional information.</li> <li>The FSIR-100 configuration tool is required to adjust parameters such as high and low modes, sensitivity, time delay and cutoff. Consult your lighting representative at Cooper Lighting Solutions for more information.</li> <li>Replace LXX with L08 (&lt;8' mounting), L20 (8'-20' mounting) or L40W (21'-40' mounting).</li> <li>Includes integral photosensor.</li> <li>Enlighted wireless sensors are factory installed requiring network components in appropriate quantities.</li> <li>Bronze sensor is shipped with Bronze fixtures. White sensor shipped on all other housing color options.</li> <li>Not available with HSS or GRS options.</li> <li>Not for use with 5NQ, 5MQ, 5WQ or RW optics. The light square trim plate is painted black when the HSS option is selected.</li> <li>CE is not available with the 1200, DALI, LWR, MS, MS/DIM, BPC, PR or PR7 options. Available in 120-277V only.</li> <li>One required for each light square.</li> <li>Requires PR7.</li> <li>Not for use with T4FT, T4W or SL4 optics.</li> <li>Cannot be used in conjunction with additional photocontrol or other controls systems (BPC, PR, PR7, MS, LWR).</li> <li>WAC Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed.</li> <li>Requires ZW or ZD receptacle.</li> <li>Replace XX with sensor color (WH, BZ, or BK).</li> <li>Smart device with mobile application required to change system defaults. See controls section for details.</li> <li>Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to <a href="http://DOMESTIC.PREFERENCES">DOMESTIC.PREFERENCES</a> website for more information.</li> <li>Components shipped separately may be separately analyzed under domestic preference requirements.</li> <li>For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.</li> <li>Not available in 1 square configuration at 800mA or below. Not available with any control option except SPB.</li> </ol>							

Product Specifications

Construction

- Driver enclosure thermally isolated from optics for optimal thermal performance
- Die-cast aluminum heat sinks
- IP66 rated housing
- 1.5G vibration rated

Optics

- Patented, high-efficiency injection-molded AccuLED Optics technology
- 13 optical distributions
- Dark Sky Approved (3000K CCT and warmer only)

Electrical

- LED driver assembly mounted for ease of maintenance
- Standard with 0-10V dimming
- Optional 10kV or 20kV surge module
- Suitable for operation in -40C to 40C ambient environments. Optional 50C high ambient (HA) configuration.

Mounting

- Gasketed and zinc plated rigid steel mounting attachment
- "Hook-N-Lock" mechanism for easy installation

Finish

- Housing finished in super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Heat sink is powder coated black
- RAL and custom color matches available
- Coastal Construction (CC) option available


Typical Applications

- Outdoor, Parking Lots, Walkways, Roadways, Building Areas


Warranty

- Five-year warranty

Optical Distributions

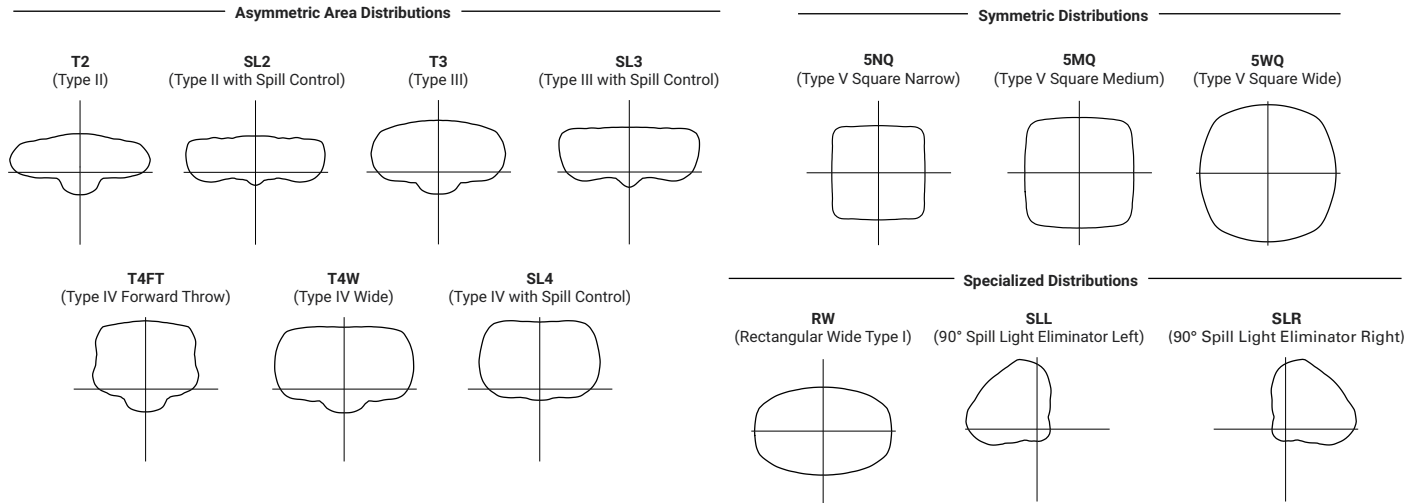

Optic Orientation

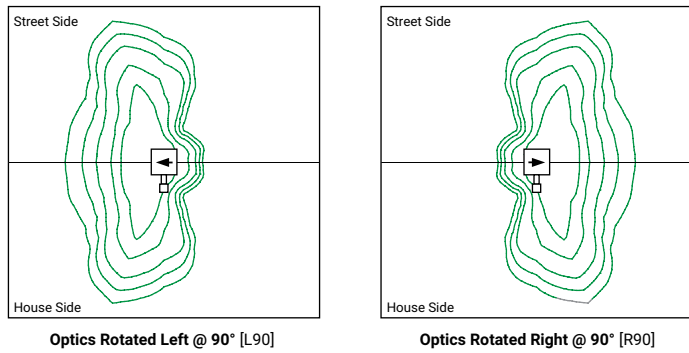


Energy and Performance Data

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

Lumen Maintenance

Drive Current	Ambient Temperature	TM-21 Lumen Maintenance (60,000 Hours)	Projected L70 (Hours)
Up to 1A	Up to 50°C	> 95%	> 416,000
1.2A	Up to 40°C	> 90%	> 205,000

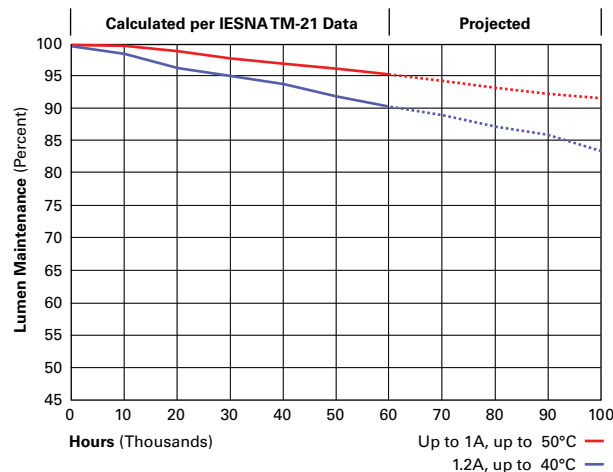

Energy and Performance Data

 [View GPC Galleon Pedestrian IES files](#)

4000K/5000K/6000K CCT, 70 CRI

Number of Light Squares		1				2			
Drive Current		615mA	800mA	1050mA	1.2A	615mA	800mA	1050mA	1.2A
Nominal Power (Watts)		34	44	59	67	66	86	113	129
Input Current @ 120V (A)		0.30	0.39	0.51	0.58	0.58	0.77	1.02	1.16
Input Current @ 208V (A)		0.17	0.22	0.29	0.33	0.34	0.44	0.56	0.63
Input Current @ 240V (A)		0.15	0.19	0.26	0.29	0.30	0.38	0.48	0.55
Input Current @ 277V (A)		0.14	0.17	0.23	0.25	0.28	0.36	0.42	0.48
Input Current @ 347V (A)		0.11	0.15	0.17	0.20	0.19	0.24	0.32	0.39
Input Current @ 480V (A)		0.08	0.11	0.14	0.15	0.15	0.18	0.24	0.30
<b>Optics</b>									
T2	Lumens	4,883	5,989	7,412	8,131	9,543	11,703	14,485	15,891
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G3
	Lumens per Watt	144	136	126	121	145	136	128	123
T3	Lumens	4,978	6,105	7,556	8,288	9,729	11,929	14,764	16,196
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3
	Lumens per Watt	146	139	128	124	147	139	131	126
T4FT	Lumens	5,008	6,140	7,599	8,337	9,783	11,998	14,850	16,290
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	147	140	129	124	148	140	131	126
T4W	Lumens	4,942	6,060	7,502	8,229	9,658	11,843	14,658	16,080
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3
	Lumens per Watt	145	138	127	123	146	138	130	125
SL2	Lumens	4,874	5,979	7,399	8,117	9,528	11,684	14,461	15,863
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B3-U0-G3
	Lumens per Watt	143	136	125	121	144	136	128	123
SL3	Lumens	4,976	6,104	7,555	8,287	9,727	11,927	14,763	16,194
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	146	139	128	124	147	139	131	126
SL4	Lumens	4,729	5,799	7,178	7,873	9,239	11,333	14,025	15,387
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G3	B1-U0-G3	B2-U0-G4	B2-U0-G4
	Lumens per Watt	139	132	122	118	140	132	124	119
5NQ	Lumens	5,134	6,296	7,793	8,547	10,033	12,303	15,226	16,704
	BUG Rating	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2
	Lumens per Watt	151	143	132	128	152	143	135	129
5MQ	Lumens	5,228	6,412	7,935	8,705	10,216	12,529	15,508	17,011
	BUG Rating	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2
	Lumens per Watt	154	146	134	130	155	146	137	132
5WQ	Lumens	5,242	6,428	7,956	8,728	10,244	12,563	15,548	17,056
	BUG Rating	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2
	Lumens per Watt	154	146	135	130	155	146	138	132
SLL/SLR	Lumens	4,373	5,365	6,640	7,283	8,547	10,481	12,973	14,231
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	129	122	113	109	130	122	115	110
RW	Lumens	5,087	6,238	7,721	8,472	9,941	12,190	15,088	16,553
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2
	Lumens per Watt	150	142	131	126	151	142	134	128

\* Nominal lumen data for 70 CRI. BUG rating for 4000K/5000K. Refer to IES files for 3000K BUG ratings.

3000K CCT, 80 CRI

Number of Light Squares		1				2			
Drive Current		615mA	800mA	1050mA	1.2A	615mA	800mA	1050mA	1.2A
Nominal Power (Watts)		34	44	59	67	66	86	113	129
Input Current @ 120V (A)		0.30	0.39	0.51	0.58	0.58	0.77	1.02	1.16
Input Current @ 208V (A)		0.17	0.22	0.29	0.33	0.34	0.44	0.56	0.63
Input Current @ 240V (A)		0.15	0.19	0.26	0.29	0.30	0.38	0.48	0.55
Input Current @ 277V (A)		0.14	0.17	0.23	0.25	0.28	0.36	0.42	0.48
Input Current @ 347V (A)		0.11	0.15	0.17	0.20	0.19	0.24	0.32	0.39
Input Current @ 480V (A)		0.08	0.11	0.14	0.15	0.15	0.18	0.24	0.30
<b>Optics</b>									
T2	Lumens	3,880	4,759	5,890	6,461	7,583	9,300	11,510	12,628
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G3
	Lumens per Watt	114	108	100	96	115	108	102	98
T3	Lumens	3,956	4,851	6,004	6,586	7,731	9,479	11,732	12,870
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2
	Lumens per Watt	116	110	102	98	117	110	104	100
T4FT	Lumens	3,980	4,879	6,038	6,625	7,774	9,534	11,800	12,945
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	117	111	102	99	118	111	104	100
T4W	Lumens	3,927	4,816	5,961	6,539	7,675	9,411	11,648	12,778
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3
	Lumens per Watt	116	109	101	98	116	109	103	99
SL2	Lumens	3,873	4,751	5,880	6,450	7,571	9,285	11,491	12,605
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	114	108	100	96	115	108	102	98
SL3	Lumens	3,954	4,851	6,004	6,585	7,729	9,478	11,731	12,868
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	116	110	102	98	117	110	104	100
SL4	Lumens	3,758	4,608	5,704	6,256	7,342	9,006	11,145	12,227
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G3	B1-U0-G3	B1-U0-G3
	Lumens per Watt	111	105	97	93	111	105	99	95
5NQ	Lumens	4,080	5,003	6,193	6,792	7,973	9,776	12,099	13,274
	BUG Rating	B2-U0-G0	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2
	Lumens per Watt	120	114	105	101	121	114	107	103
5MQ	Lumens	4,154	5,095	6,305	6,917	8,118	9,956	12,323	13,518
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2
	Lumens per Watt	122	116	107	103	123	116	109	105
5WQ	Lumens	4,166	5,108	6,322	6,936	8,140	9,983	12,355	13,553
	BUG Rating	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2
	Lumens per Watt	123	116	107	104	123	116	109	105
SLL/SLR	Lumens	3,475	4,263	5,276	5,787	6,792	8,329	10,309	11,309
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens per Watt	102	97	89	86	103	97	91	88
RW	Lumens	4,042	4,957	6,135	6,732	7,900	9,687	11,990	13,154
	BUG Rating	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2
	Lumens per Watt	119	113	104	100	120	113	106	102

\* Nominal lumen data for 70 CRI. BUG rating for 4000K/5000K. Refer to IES files for 3000K BUG ratings.




**Control Options**

**0-10V** This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.



**Photocontrol** (BPC, PR, and PR7) Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

**After Hours Dim (AHD)** This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a “dusk-to-dawn” period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

**Dimming Occupancy Sensor (SPB, MS/DIM-LXX and MS-LXX)** These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

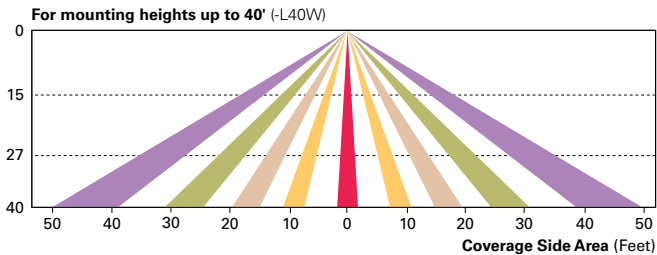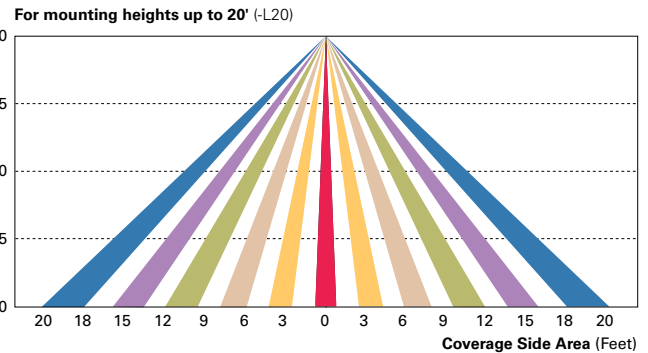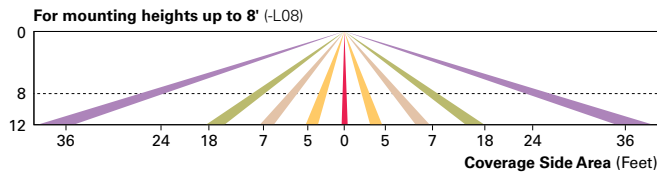

**Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)** The Enlighted control system is a connected lighting solution, combining LED luminaires with an integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes while collecting valuable data about building performance and use. Software applications utilizing energy dashboards maximize data inputs to help optimize the use of other resources beyond lighting.

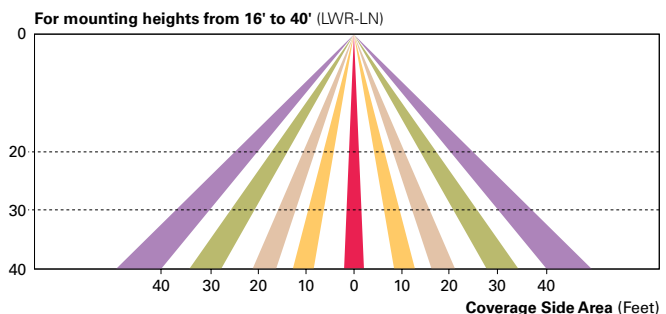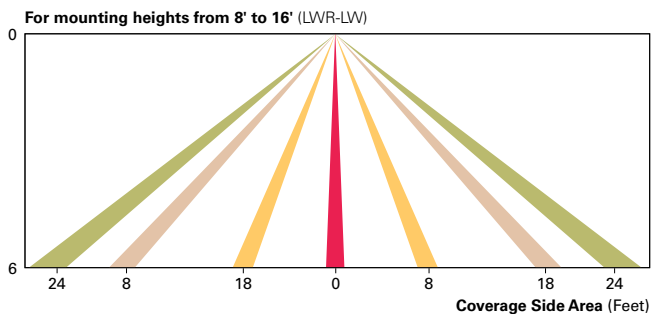

**WaveLinX Wireless Outdoor Lighting Control Module (WOLC-7P-10A)** The 7-pin wireless outdoor lighting control module enables WaveLinX to control outdoor area, site and flood lighting. WaveLinX controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.