
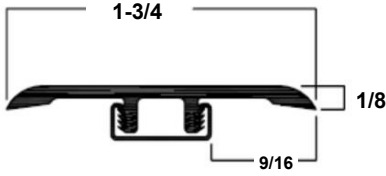

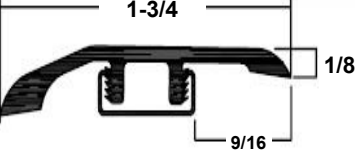

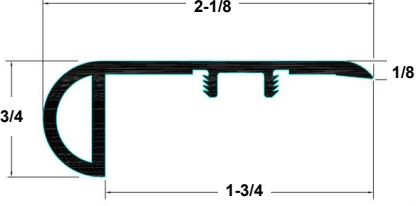

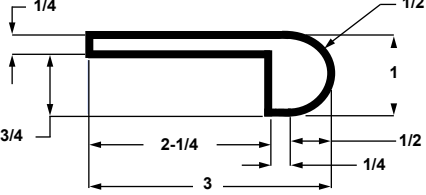



# MOLDING PROFILES & SPECIFICATION SHEET

<p><b>T-Molding</b> 72" • 10pc/ct</p> 	 <p>Dimensions: 1-3/4, 1/8, 9/16</p>
<p><b>Multipurpose Reducer</b> 72" • 10pc/ct</p>  <p>Vinyl Tiles or Carpet</p>	 <p>Dimensions: 1-3/4, 1/8, 9/16</p>
<p><b>Overlap Stair Nose</b> 94" • 5pc/ct</p>  <p>Stair Riser, Sub-Floor</p>	 <p>Dimensions: 2-1/8, 1/8, 3/4, 1-3/4</p>
<p><b>Qtr Round</b> 94" • 10pc/ct</p> 	<p>Finishes the perimeter of the floor. Should not be affixed to the vertical surface and not affixed to the flooring itself.</p>
<p><b>Flush Stair Nose</b> 94" • 10p c/ct</p> <p>*Available only for for 6.5mm thick products</p>	 <p>Dimensions: 1/4, 1/2, 1, 3/4, 2-1/4, 1/2, 1/4, 3</p>
<p><b>Snap Trak</b> (Packed with each molding)</p> 	<p>Position track 3/16" away from resilient vinyl floor. Screw track to subfloor. Snap molding onto track. Track in adjustable from 3.8mm to 5.2mm thick vinyl flooring.</p>

### Additional Info:

**Simple SnapTrack Installation:** Same concept as Laminate flooring moldings used with Stairnosing, T-Molding and Multipurpose Reducer.

**Adjustable:** Stair Nosing, Multipurpose Reducer and T-Molding utilize a metal track which allows one sku to work with thicknesses of vinyl from 3.0mm –5.2mm.

**Matched Molding:** The same décor vinyl and wear layer that is used for the flooring is used for the molding.

**Warranty:** The same wear layer is used as with the flooring which will allow the moldings to wear just as long as the coordinating flooring.