LED Strip Light -- SIDE BEND Series



This flexible LED light strip SIDEBEND is great for sideview light output project where space is limited. The 5m (16.4') LED light strip is available with a white finish and can be easily cut into 1-LED segments and installed with its peel-and-stick adhesive backing.

Features

- Slim, flexible and cuttable design allows for easy installation and illuminates every edge with light.
- Great for special cases need side view light, and short cut point makes free-cuting available.
- Easy installation featuring 3M VHB adhesive backing.
- Dimmable available with PWM, Forward phase, Triac, 0-10V, MLV, ELV.
- 50,000h long lifespan with 5 years limited warranty.
- UL listed.














Specification


Input Voltage	12VDC				
Dimmable	PWM, Forward phase, Triac, 0-10V, MLV, ELV				
Lead Wire	20 AWG, 2ft				
Color Temperature	2700K	3000K	4000K	6500K	
Brightness	411 lm/ft	434 lm/ft	457 lm/ft	457 lm/ft	
Light Efficacy	93 lm/W	99 lm/W	103 lm/W	103 lm/W	
Power Consumption	4.4W/ft				

LED Quantity	36 LEDs/ft	
No Voltage Drop	16.4 ft Max	
LED Chip	4020	
Operating Temperature	-13°F~104°F	
Lumen Maintenance	50,000 hrs	
CRI	90+	
IP Rating	IP20 (Dry location)	

Dimension

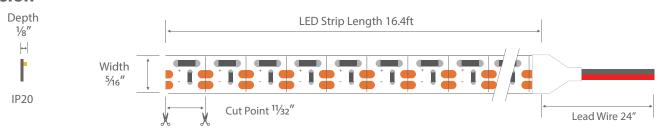

Order Information

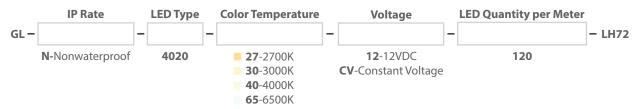

Voltage Drop Guidance Chart

This table provides general guidelines for determining Wire Gauge based on total load and distance from LED transformer to beginning of luminaire.

12V Voltage Drop & Wire Length Distance Chart (3% Drop or 11.64V)

Wire Gauge (AWG)	10W 0.83A	20W 1.7A	30W 2.5A	40W 3.3A	50W 4.2A	60W 5A
20	18ft	9ft	6ft	5ft	4ft	3ft
18	34ft	17ft	11ft	8ft	6ft	5ft
16	54ft	27ft	18ft	13ft	10ft	9ft

Step 1: Calculate Total Load: Check the power consumption of the LED light (e.g. 3W/ft). Calculate the total load of the LED light based on the light length (e.g. 10ft). The total load is 3W/ft x 10ft = 30W.

Step 2: Find Distance from Transformer to the Light Beginning: Check the distance between the transformer to the beginning of the light onsite. Let's assume it is 10ft. Round up to the nearest one on the table (Column 30W), which is 11ft.

Step 3: Choose Suitable Wire Gauge: According to the table (Column 30W & Row 11ft), it's recommended to use 18AWG or up wire between the transformer and LED light to eliminate voltage drop.

Note: This table is calculated based on the theoretical voltage drop formula. The wire quality, the LED light technology and environment conditions affect the result also. This table is only for reference.

LED Strip Light Comparison Chart

	Series	Features	Color Temperature	Input Voltage	Lumen Output	No Voltage Drop	Power	CRI
1200C	DIM TO Light Effiency WARM 105LM/W		1800K~3000K	24VDC	Up to 462 lm/ft	16.4ft Max	4.4W/ft	97+
**************************************	INFINITE Max Run 65.6ft		2700K, 3000K, 3500K, 4000K	24VDC	Up to 234 lm/ft	65.6ft Max	3W/ft	90+
INDE	ECO	Cost Effective	2700K, 3000K, 4000K	12VDC	Up to 226 lm/ft	16.4ft Max	3W/ft	90+
**************************************	PRO	73 LEDs/ft	2700K, 3000K, 4000K	24VDC	Up to 575 lm/ft	16.4ft Max	4.4W/ft	90+
NAMES OF THE PROPERTY OF THE P	Brightest CRI 94+		1800K, 2700K, 3000K, 4000K, 6500K, Blue, Red		Up to 848 lm/ft	16.4ft Max	7W/ft	97+
12VOC (12VOC (12VOC) (12VOC (12VOC (12VOC (12VOC (12VOC (12VOC (12VOC (12VOC (12VOC)	NARROW 0.2in Width		2700K, 3000K, 4000K	12VDC	Up to 339 lm/ft	16.4ft Max	3W/ft	90+
•24/00	COB Seamless		2700K, 3000K, 4000K, 6500K	24VDC	Up to 416 lm/ft	16.4ft Max	4.4W/ft	90+
, 1986 	FOR High temperature Resistance		2700K, 3000K, 4000K, 6000K	24VDC	Up to 287 lm/ft	16.4ft Max	3W/ft	90+
	SIDE BEND	Bendable & Cut Flexible	2700K, 3000K, 4000K, 6500K	12VDC	Up to 457 lm/ft	16.4ft Max	4.4W/ft	90+
-2AVDC	TUNABLE WHITE Tunable		1800K-6500K	24VDC	Up to 498 lm/ft	16.4ft Max	7W/ft	97+
*12/00	FOR BREAD	Fresh Bread	2500K	12VDC	Up to 200 lm/ft	16.4ft Max	4.4W/ft	97+
*12100	FOR MEAT	Fresh Meat	2900K	12VDC	Up to 200 lm/ft	16.4ft Max	4.4W/ft	97+

Recommended Transformer (Sold Separately)

LED Dimmable Transformer - 5 in 1 dimming

G Series



Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
G-100W-12V	12V	100W	8 ²¹ / ₃₂ "x3 ³ / ₄ "x1 ²³ / ₃₂ "	FCC, UL, Class 2

LED Dimmable Transformer - Triac

F Series




Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
F-100W-12V	12V	100W	8.66x3.72x1.57in	FCC, ETL

LED Mini Dimmable Transformer - ELV




Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
MINI-TA-60-12V	12V	60W	2.70x1.29x0.84in	RU, Class 2

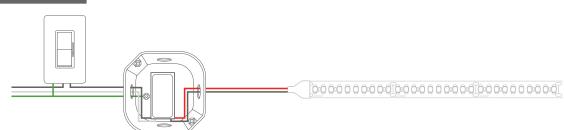

Mini Transforer Wiring Diagram (In Junction Box)

*This diagram is for references only. Please see LED Mini Dimmable Transformer Specification for a more accurate diagram.

LED Non-Dimmable Transformer



Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
APV-8W-12V	12V	8W	2.30x1.20x0.90in	CE, RU, Class 2
APV-35W-12V	12V	35W	3.30x2.20x1.20in	CE, RU, Class 2
XLG-100W-12V	12V	100W	5.51x2.48x1.26in	CE, RU
XLG-150W-12V	12V	150W	7.09x2.48x1.40in	CE, RU

GL LED US LIGHTING reserves the right to modify this specification without prior notices.