
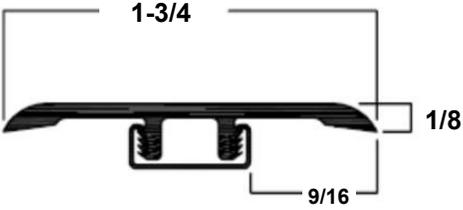

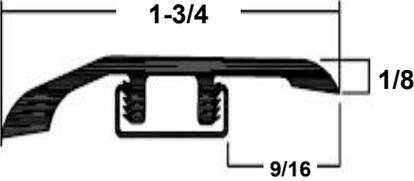

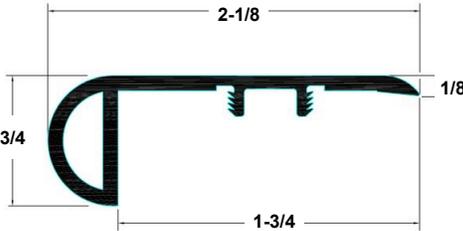




<p><b>T-Molding</b> 72" • 10pc/ct</p> 	
<p><b>Multipurpose Reducer</b> 72" • 10pc/ct</p>  <p>Vinyl Tiles or Carpet</p>	
<p><b>Overlap Stair Nose</b> 94" • 5pc/ct</p>  <p>Stair Riser Sub-Floor</p>	
<p><b>Qtr Round</b> 94" • 10pc/ct</p> 	<p>Finishes the perimeter of the floor. Should not be affixed to the vertical surface and not affixed to the flooring itself.</p>
<p><b>Snap Trak</b> (Packed with each molding)</p> 	<p>Position track 3/16" away from resilient vinyl floor. Screw track to subfloor. Snap molding onto track. Track is adjustable from 3.8mm to 5.2mm thick vinyl flooring.</p>

### Additional Info:

**Simple SnapTrack Installation:** Same concept as Laminate flooring moldings used with Stairnosing, T-Molding and Multipurpose Reducer.

**Adjustable:** Stair Nosing, Multipurpose Reducer and T-Molding utilize a metal track which allows one sku to work with thicknesses of vinyl from 3.0mm – 5.2mm.

**Matched Molding:** The same décor vinyl and wear layer that is used for the flooring is used for the molding.

**Warranty:** The same wear layer is used as with the flooring which will allow the moldings to wear just as long as the coordinating flooring.