

The assembly instruction for Cargo bike

1. Take out the Cargo bike from the frame.




2. Place Cargo bike on a flat surface, take out the front fender and front wheel, then assemble them well. And then assemble the front brake cable.



Note: Need to assemble a spacer and two washers on left side of front wheel.



3. Assemble the handlebar and instrument. **Especially note how are the instrument lines connected.**

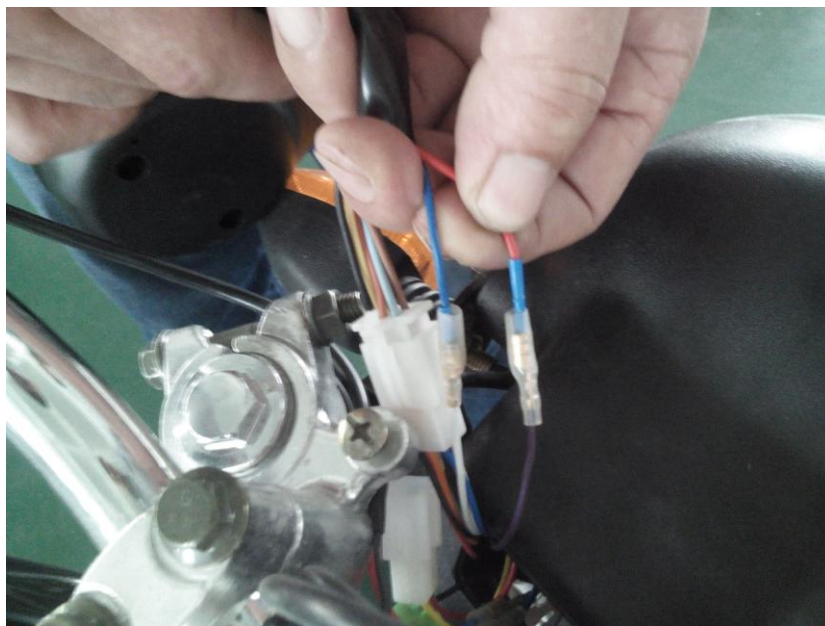


4. Please assemble head board firstly, and then assemble others boards.



5. Assemble the arm rest.




6. After installation and before driving, please open the switch(A).

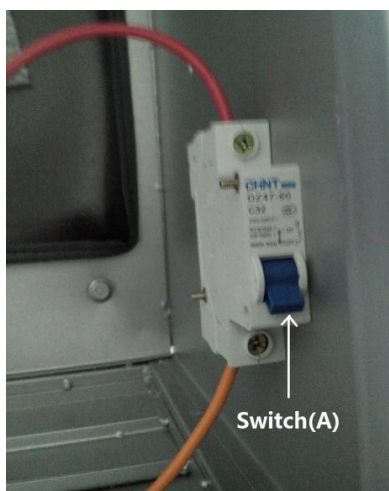

Others instruction:

1. Speed switch

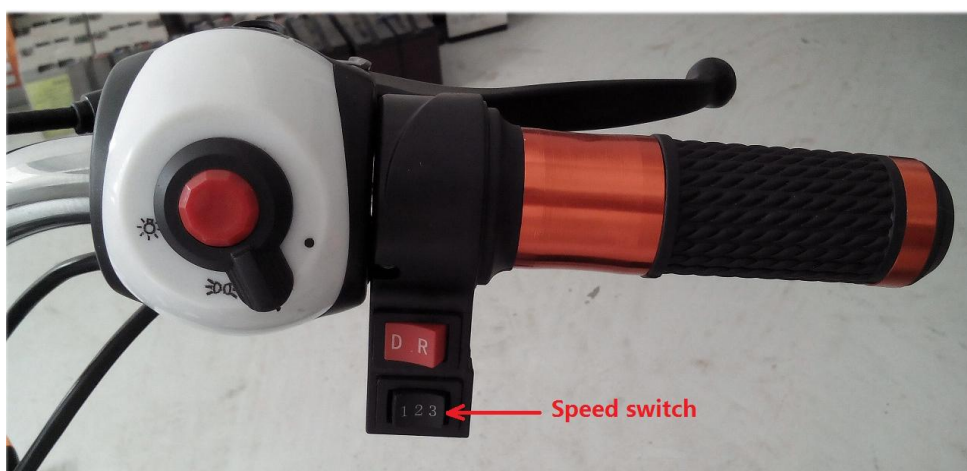


1: low speed

2: high speed

3: middle speed

2. Gear shift

The new Cargo bike has two gears, high-grade and low-grade. When climbing and very difficult to climb, you can stop the Cargo bike, and then change the low-grade to climb.

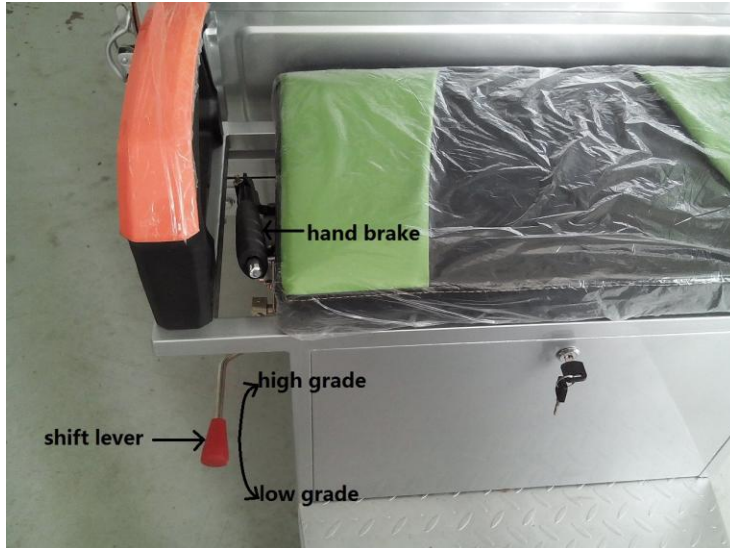

Note1: When changing the gears, you must stop the Cargo bike.

Note2: When stopping the Cargo bike, please pull the hand brake.