


CLEVERCLEAN PRO FOR BUILDING FACADES

INTENDED USES:

Developed for taking care of house facade, wallboard, wall panel, house exterior, insulated panels, sandwich panels, weather boardings, fiberglass panels, PVC cladding and other non-porous sidings from metal, plastic or painted wood.

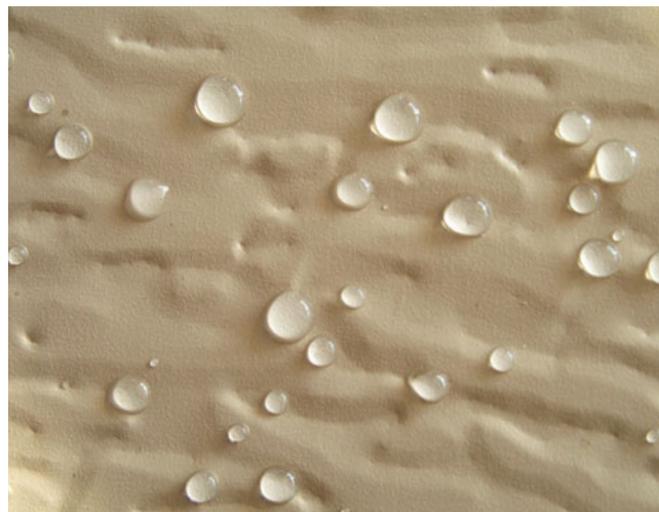

PRODUCT DESCRIPTION:

Green product based on nanotechnology are prepared from mixture from liquid polymers with included nano composition. They form in surface the optically transparent coating refreshing interior details of the clean house. Green products for home interior fill the defects in surfaces and visually eliminate them after polishing that enhances the effect "clean house".

Protect the house wall paneling from dirt and pollution using eco-friendly solution. Once coated with CleverCLEAN PRO for building facades house facade remains protected for a long time (up to one year) and makes regular house wash more infrequent and easy to complete. The outside of your house will look sparkling clean as the surfaces coated with pro product rejects all dirt and fouling.

House washing was never been easier before! Apart from water and dirt repellent protection, the house facing materials, sidings, panels and facades obtain protection from microbiological and floral growth. Algae on the walls, moss and lichen cannot grow on protected house facade as they don't have any surface to fixate.

Everyone loves clean house facades. Property cleaning and house wash requires a lot of time and thus this work is not very pleasant to do. Apart from that, house visual appearance worsens after some time. CleverCLEAN PRO for building facades protects your house visual appearance from ageing. The product refreshes surfaces and effectively protects from UV radiation, which is causing degradation and destruction of many materials used in sidings and house facades.

There are several ways to go green. One of them is using CleverCLEAN PRO for building facades when planning a house wash. Thanks to the protective layer all external filth is easily washed down, no need for using dangerous to environment toxic cleaners and detergents. You can save money on regular expensive washing liquids up to 90%. The protective and polishing product is also very economic- only 3 grams per square meter! Optimize your house cleaning business, gain time and minimize your expenses on materials and labor. You and your customers will value it.

TECHNICAL INFORMATION:

Parameter	Specification
Appearance	Milk color oily liquid
Vapor Density, air = 1	not determined
Volatility,%	not determined
Boiling point, °C min.	197
Melting point, °C max	-50
Evaporation rate	not determined
Viscosity, cSt	15-25
Specific Gravity, g/cm ³	1,086-1,120
Flash point, °C, min	72
Auto ignition Temp., °C,min	not determined
Solubility	Alcohol, Ether, Acetone

Removing coating from surface is possible with alcohol (ethyl or isopropyl), also by steam and next mechanically with microfiber cloth.

SURFACE PREPARATION:



Surface must be dry and clean before applying first time. For re-coating necessary only dry surface. It is not recommended to treat the window glass inside placement when not good air exchange because super hydrophobic surface can be reason of the unwanted sweat in window glass.


APPLICATION:

For application recommended microfiber cloths: terry structure for distribution/removing exceed of the product and plane (polish) structure for polishing coated surface. Both cloths must be prepared from 20% polyamide and 80% polyester and density not less 250g/m²

Coat is possible under any outdoor temperature.

Recommended use product quantity as less as possible. Consumption is only 3g/m² with possible losses. Useful coating in surface is only 1g/m².

	<p>Shake the bottle before use. Little wet terry cloth with product Cloth.Terry without excess. Close cap after use.</p>
	<p>Evenly distribute the product on dry surface by Cloth.Terry.</p>
	<p>Wait 3-5 min.</p>
	<p>Remove exceed the product by same terrycloth.</p>
	<p>Polish by plain cloth Cloth.Polish the surface.</p>



Don't expose the surface by rain or by action with wet cloth about 1,5-2 hours. Protective surface is obtained the best protection in 12 hours after coating.

PRODUCT HAZARDS AND SAFETY INFORMATION:

See Material Safety Data Sheet for complete Health and Safety information. Do not use in confined areas without the proper safety precautions/equipment.

ADDITIONAL DATA:

Product is prepared according to existing legislation European Union. Product has not volatile matter and holds the nano components tight inside its structure. Nano particles cannot be separated one from polymer mixture. it guarantees that nano-sized particles do not get "loose" and incur to human organism and harm our health and surrounding environment. Product waster

Lasting effect: 3 months min and depend from external environment.

PACKING OF THE NANOTECH EASY TO CLEAN PRODUCT CLEVERCLEAN PRO FOR BUILDING FACADES



Product is packed in 450g bottle.

20 bottles in carton;

Carton's size: 25cm x 36cm x 25cm

Carton's gross weight: 10.32kg

Pallet: 72 cartons/1140 bottles

Pallet's size: 120cm x 100cm x 215cm

Pallet's gross/net weight: 743kg/768kg

Labels in three languages: English, Estonian, Russian;

Order customized labels is beginning from 500 units min. per product.

SHIPPING AND EXPORT INFORMATION

Non-hazardous for any transrtation.

Export HS code: 3405909000



Nanoformula OÜ

VAT no. EE100140543, reg. no.10045133

Narva mnt.4, Voka, 41701, Estonia, Tel.:+372 39 71305, Fax: +372 39 71303

<http://www.nanoformula.eu>, email:info@nanoformula.eu