



One Sided Smokey Bear Display

The single sided Smokey (72" x 35.6" at base) has four "in-line" mounting holes. Holes 1-3 get the 2" lag screw w/ washer. Hole 4 gets a 4" x 3/8" bolt. If security lock is used, hole 4 gets the 3.5" security pin lock instead of 4" bolt. (the lock goes on back of post)

Hole 1

Hole 2

Hole 3


Hole 4

***4" x 3/8" bolt or Security lock here

The FDS has 4 mounting holes that receive 2" lag screws and washers

There are also 2 holes that mate up with the 2 holes in Smokeys arm. These receive the 5/16" x 3/4" machine screws and nylon lock nuts. The FDS goes in front of Smokeys arm.

***It is important that everything is assembled before posts are set, or cemented, in the ground to make sure that everything lines up correctly.

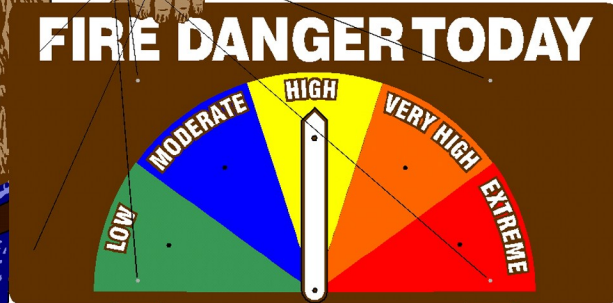

The rider sign also has 4 smaller mounting holes that get the #10 pan head 1.5" phillips screws

72"

22" - 24" typical below grade

93" long post

71" long post

71" long post

19.5" on center

27.125" on center

76.5"