

Installation Manual

VIVID Single Colour Dimming Controller

Date: 06/2018

Order Code	Product Code	Description
21100	DIMMING CONTROLLER	VIVID Dimmer to suit warm white/ white deck light 21101, 21102, 21104, 21105, RF hand held controller + receiver

Thank you for purchasing your new VIVID dimmer, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Technical Parameters (remote control)

Power Supply:	AAA battery (2 pcs)
Cover material:	ABS
Fabrication processing:	Multi-colour printing

Technical Parameters (controller)


Working voltage:	DC12V/24V
Output control:	1 Circuit
Control current:	6A/circuit
Dimension:	L85xW64xH24
Receiving range:	20 metres

How to use


1. Use your finger to touch the dimming ring, where can change the brightness from the highest to the lowest setting (100% - 1%, 50 grades to adjust).
2. Memory function. The previous setting will be retained after turning power on.
3. Matching code: Press Key 3 once within 3 seconds when power on again, the light will blink 3 times if matching is successful.
4. Clearing Code: Press Key 3 five times within 3 seconds when power on again, the light will blink 6 times if clearing is successful.
5. Caution: Don't touch or press the dimming ring while loading the batteries to protect the sensitiveness. Please use the remote controller 3 seconds after the batteries are loaded. Please reload the batteries when you find the dimming ring is not sensitive.

Key Functions

- Key 1: on
- Key 2: off
- Key 3: Highest brightness
- Key 4: Medium brightness
- Key 5: Lowest brightness

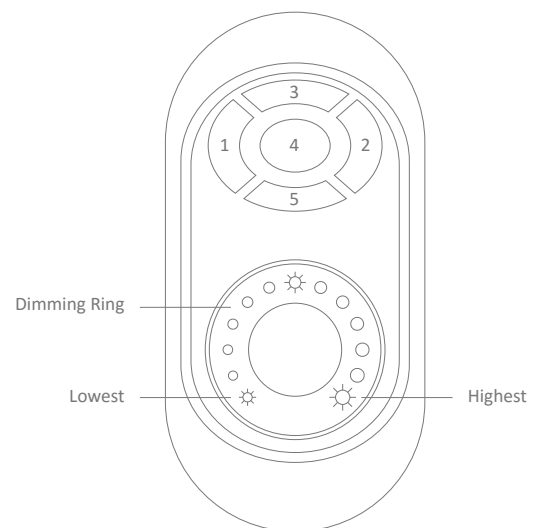

Connecting Chart

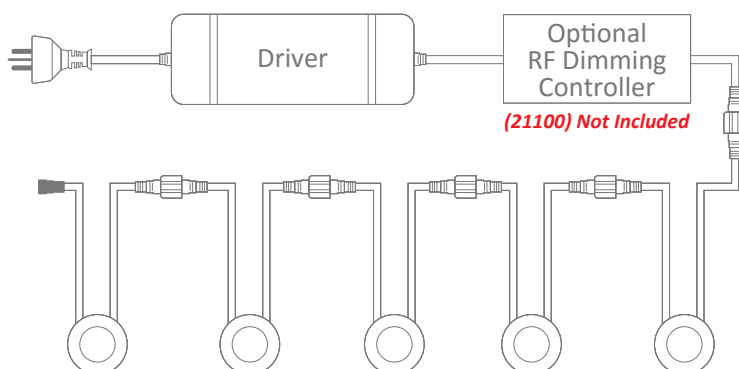

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas