

MALIBU Series Installation Guide

Thanks for choosing our Malibu Series ceiling fan.

We strongly recommend that you read this manual carefully before installation.



Models Parameters (Fan Only):-

MMF133MBR	1320mm 3 Blade Ceiling Fan Matt Black/Bamboo with remote control
MMF133MMR	1320mm 3 Blade Ceiling Fan Matt Black with remote control
MMF133OWR	1320mm 3 Blade Ceiling Fan Walnut with remote control
MMF133WWR	1320mm 3 Blade Ceiling Fan White with remote control

Models Parameters (Fan and Light):-


MMF1333MBR	1320mm 3 Blade Ceiling Fan Matt Black/Bamboo, 15W Tricolour LED Light with Remote Control
MMF1333MMR	1320mm 3 Blade Ceiling Fan Matt Black, 15W Tricolour LED Light with Remote Control
MMF1333OWR	1320mm 3 Blade Ceiling Fan Walnut, 15W Tricolour LED Light with Remote Control
MMF1333WWR	1320mm 3 Blade Ceiling Fan White, 15W Tricolour LED Light with Remote Control

Part List:

Qty 1x motor assembly	Qty 1x instruction manual	Qty 1x screw kit
Qty 1x balancing kit	Qty 1x hanging bracket	Qty 1x remote control kit
Qty 3x blades		

Application


Flat Surface / Ceiling

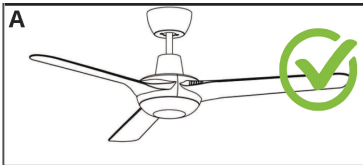

Slope Ceiling up to 15°



Corrugated Ceiling

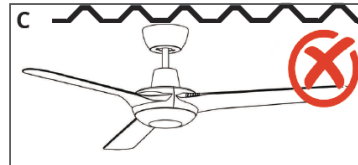


Apex Ceiling




How to Assemble

Fg.1

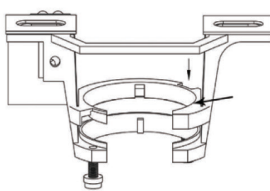


Secure the hanger bracket to ceiling beam or a suitable piece of timber inserted between the ceiling beams using the two long screws supplied with the package. (See Fg.1)

Fg.2




Place circular shockproof gasket above the hanger bracket. Align the bracket and screw the hanger bracket to the ceiling tightly. (See Fg.2)

Fg.3



Place fan into hanger bracket and align Ball Joint Slot with hanger bracket as illustrated. (See Fg.3)

Fg.4




After wiring is completed, attach the canopy to the hanger bracket by pushing upwards and twisting anti-clockwise. Tighten screws and ensure canopy is not touching the ball joint. (See Fg.4)

WARNING Installation **MUST** carry out by a qualified and licensed electrician.


How to Install Blades

Fig.5- Fan Only

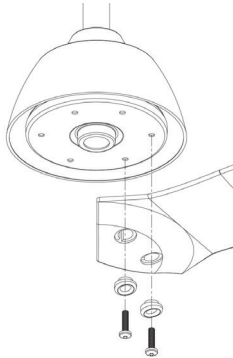

Attach the blade to the top of the motor using the 2 blade screws provided. Tighten the screws and repeat this procedure for all blades. (See Fig. 5)


Fig.6 - Fan and Light

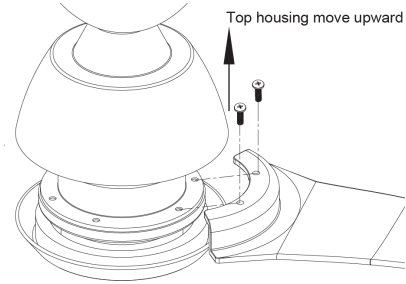

Push top housing upward. Attach the blade to the top of the motor using the 2 blade screws provided. Tighten the screws and repeat this procedure for all blades. (See Fig. 6)

How to Install / Remove the Glass Shade


Fig.7

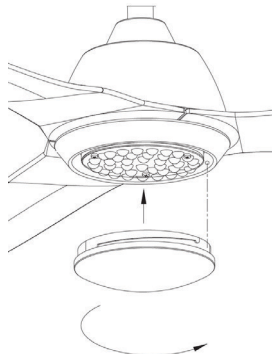

To install - place the glass shade and spin it clockwise.
To remove - turn the glass shade anti-clockwise.
(See Fig.7)

CCT (Colour Changeable Temperature)

Fig.8

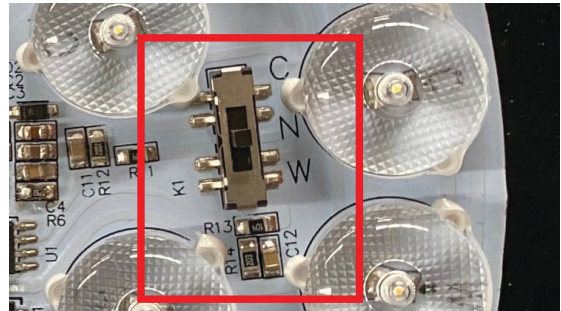

Choose colour temperature by flicking the switch in the LED (See Fig.8)


C = 3000K cool white

N = 4000K neutral white

W = 5000K warm white


WARNING Installation MUST carry out by a qualified and licensed electrician.

Instructions and Functions of Transmitter

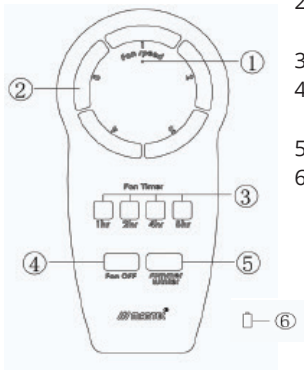

1. LED indicator light
2. Speed of the fan
(1 high speed - 5 low speed)
3. Timing control of the fan
4. Direction of the fan (reverse switch)
5. Fan ON/OFF
6. 12v battery to be used in transmitter

NB: Remote shown fan only

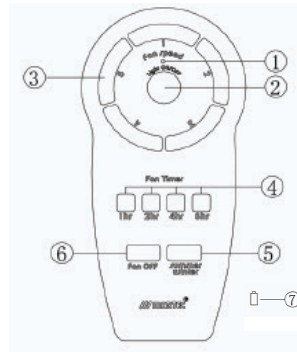


1. LED indicator light
2. Light ON/OFF
(Use to dim light within 1s)
3. Speed of the fan
(1 high speed - 5 low speed)
4. Timing control of the fan
5. Direction of the fan (reverse switch)
6. Fan ON/OFF
7. 12v battery to be used in transmitter

NB: Remote shown fan and light

Installing Receiver Remote Control


NB: Receiver shown fan and light

NB: Receiver shown fan only

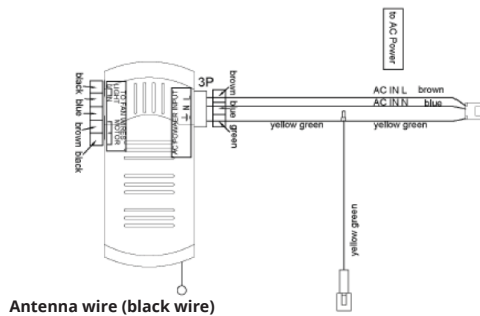

Antenna wire (black wire)

NB: Receiver shown fan and light

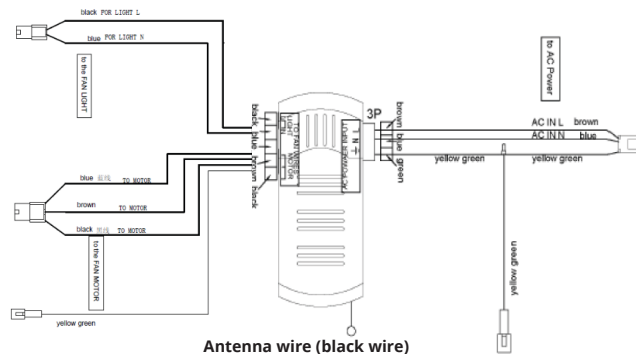


Antenna wire (black wire)

Important Reminders

- Receiver must be correctly installed in the mounting bracket
- When the transmitter cannot control the receiver, please check
 - i) has sufficient battery in the transmitter
 - ii) any existence of similar remote controlled products nearby that cause interference
- Replace battery if getting low as this will affect sensitivity of the transmitter
- Take the battery out from the transmitter when leaving used for a long time to avoid battery leaks
- Support up to 200W lighting power
- Isolation switch MUST be connected in the line
- Dimming switch on the light models is operated by tuning the light ON/OFF button within 1s. Light output will dim in stages from 24W to 9W to 3W approximately

WARNING Installation **MUST** carry out by a qualified and licensed electrician.

Wire Connections

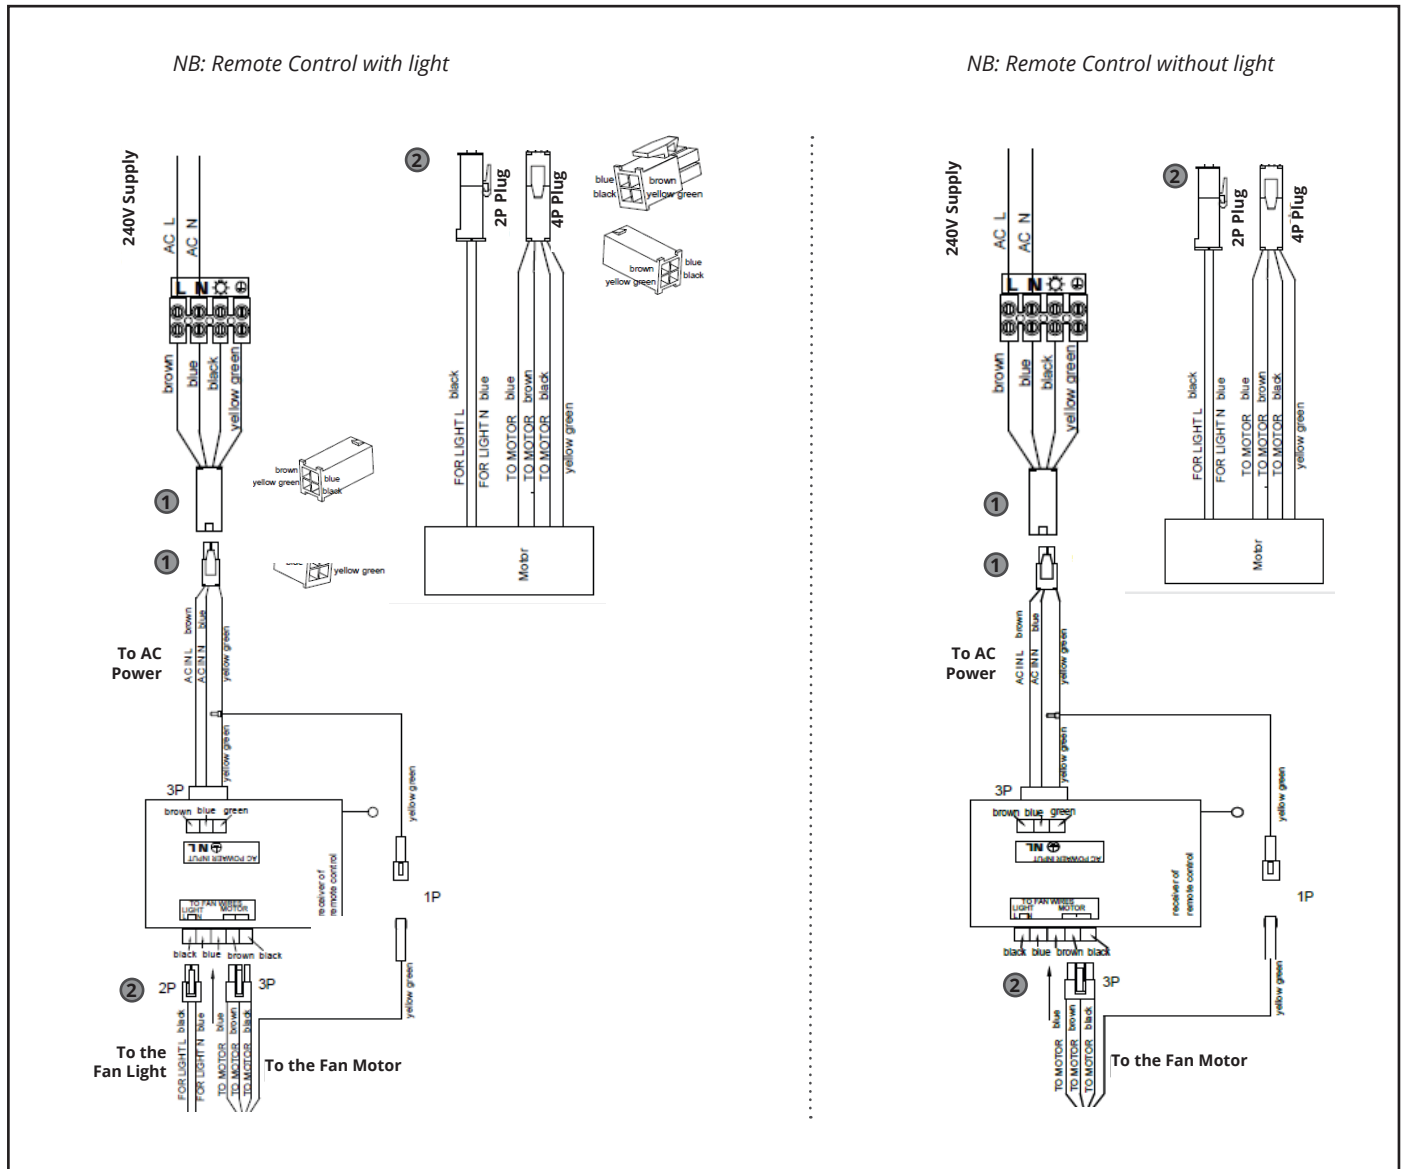

6* Year Warranty

Visit our website for details <https://www.martecaustralia.com.au/warranty-statement/>



WARNING

- Installation of fans **MUST** follow SAA standards and meet local authority regulations.
- Installation **MUST** be carried out by a qualified and licensed electrician.
- Fan and light **MUST** be earthed.
- Bracket **MUST** be firmly attached to a flat solid structure or timber frame.
- **DO NOT** mix blades from one model to another, all blades **MUST** be replaced if damaged.
- The warranty is **VOID** if product is not installed according to this installation guide.