



INSTRUCTION GUIDE

Residential Multi-Purpose Light

Model No.SLDFL0004C-4W-PIR/WW, SLDFL0004C-4W-PIR/CW

PACKAGING CONTENTS

- 1 x Light Fitting
- 1 x Solar Panel
- 1 x Mounted Bracket
- 1 x Pole Clamp
- 1 x Pack of Screws



LIGHTING MODES

ON - Light works Dusk to Dawn via solar panel

PIR - Light activates when PIR motion sensor is triggered (See **FIGURE 1** for dial diagram)

TIME DIAL- Select short or long length of time light will remain on after last movement is detected (5-40secs) (**FIGURE 1**)

SENS DIAL - Adjust dial to low or high sensitivity of the PIR sensor (**FIGURE 1**)

INSTALLATION METHOD

1. Remove contents from packaging
 2. Locate the “**ON/OFF/PIR**” power switch on the underside of the fitting and select your desired working mode
- (Note, your light is packaged & transported with the power switch in the “**OFF**” position)

ASSEMBLY & INSTALLATION

Light Fitting

1. Fix mounting plate by drilling 3 holes in selected wall
2. Using the supplied screws, attach the light fitting by drilling the fitting to the mounting plate (**FIGURE 1**)
3. To adjust the angle of the light, turn the swivel head

Solar Panel

If mounting your solar panel on a pole/post:

1. Connect your solar panel to the metal clamp using the supplied screws (**FIGURE 2**)
2. Bring the black clamp base through the metal clamp and tight to the bottom of the pole
3. Using the screw on the thread of the metal clamp, tighten so the clamp base is hard against the pole (**FIGURE 3**)

IMPORTANT NOTES

- **Please ensure you place your solar panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified.
- It's best not to install the fitting under a street light, porch light or similar as this may stop the automatic day-night sensor triggering and result in your lights not turning on

TROUBLE SHOOTING

| Phenomenon | Cause | Inspection Method | Solution |
|--|------------------------------|--|---|
| Light won't turn on | Switch hasn't been turned on | Determine what position the switch is in | Turn the switch on |
| | Battery has run flat | Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight | Charge the light in direct sunlight for 1-2 days then check again |
| The light only stays on for a short amount of time | Low Battery | 1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather | 1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel |
| | Battery Failure | 1. Access the light and & replace battery 2. Battery has matured | Contact SLD Customer Service to buy new batteries |

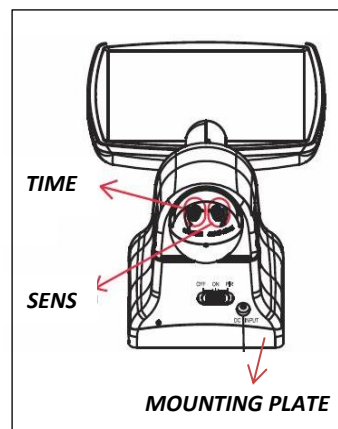


FIGURE 1



FIGURE 2




FIGURE 3