



INSTRUCTION GUIDE

Residential Wall Light

Model No. SLDWL0022-4.2W/BLK, SLDWL0022-4.2W/SS

PACKAGE CONTENTS

- 1 x Light Fitting
- 1 x Pack of mounting screws



FEATURES

1. IP44 Waterproof Rating
2. Pyro-electric Infrared Sensor
3. Built in Photo Electric Cell (Day/Night Sensor)
4. 3 Operation Settings
5. 6-9 Hours Operation per day
6. 4-6 Hours Charge time
7. Flush Wall Mount Base
8. Warm White LEDs

LIGHT FUNCTIONS

1. **Green** Indicator Light – A dim 40 lumen light stays on constantly throughout the night when no motion is detected. When the motion sensor is triggered the light goes to 150 lumen brightness and stays on for 40 seconds before switching back to dim.
2. **Blue** Indicator Light – The light is completely off until the motion sensor is triggered. When triggered, the light comes on at 200 lumen brightness and stays on for 40 seconds.
3. **Red** Indicator Light – The light comes on at night at 30 lumens and stays on the remainder of the night.

INSTALLATION METHOD

1. Remove contents from packaging
2. Decide where to mount your wall light (where the light will receive maximum direct sunlight – See “Important Notes”)
3. Press the button on the front face of your light “ON” to your desired setting.

Please refer to FIGURE 1 for the following steps:

4. Drill 3 holes in your chosen wall as per the dimensions & insert the plastic anchors.
5. Insert screw into the anchor at point (1) leaving the screw to project 5mm from the wall, now fix the light onto the wall by hooking the Keyhole over the screw at point (1).
6. Finally insert screws into points (2 & 3) from the front of the fitting to tightly secure.

IMPORTANT NOTES

- Please ensure you place your Solar Panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified.
- It's best not to install these lights underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	Charge the light in direct sunlight for 1-2 days then check again
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel
		Battery Failure	1. Access the light and & replace battery 2. Battery has matured

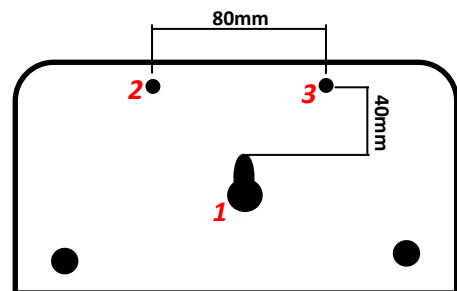


FIGURE 1