

Fovero Wall Sconce

(1) ATTENTION

- 1.1 To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- 1.2 All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with the methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 1.3 These fixtures are intended to be wall-mounted and must be supported by the building structure.
- 1.4 Do not operate the lighting fixture close to any combustible material.
- 1.5 Ensure that the fitting is cool and switched off before changing the bulb/fixture.
- 1.6 Do not use bulbs exceeding the maximum wattage as marked on the lighting fixture.
- 1.7 After installing the luminaries, use waterproof glue (ex. GE-108) for caulking compound.
- 1.7.1 Caulk completely around where the back of the backplate meets the wall surface to prevent water from falling into the outlet box.
- 1.7.2 Caulk completely around gap between the parts of the enclosure to prevent water from seeping into the enclosure.

(2) CAUTION BEFORE INSTALLATION

- 2.1 Prepare tools and materials required, e.g.: Ladder, Wrench, Wire Cutter, Screw Driver, Bulbs and Wiring supplies as required by electrical code.
- 2.2 Before starting the installation, disconnect the power by opening the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is NOT sufficient to prevent electrical shock.
- 2.3 If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring.
- 2.4 Make sure no rough or sharp edges are in contact with any of the wire, to ensure the insulation on any of the wires has not been damaged during the installation.
- 2.5 The bare or green insulated wire is for grounding, do not connect with current carrying wires.
- 2.6 First, connect the white fixture wire with the white supply wire. Then connect the black fixture wire with the black supply wire. After the fixture wires are connected with the supply wires, the bare parts of the wires need to be completely covered by a connector, to prevent it from causing a short circuit and electric leakage.

Diagram #1


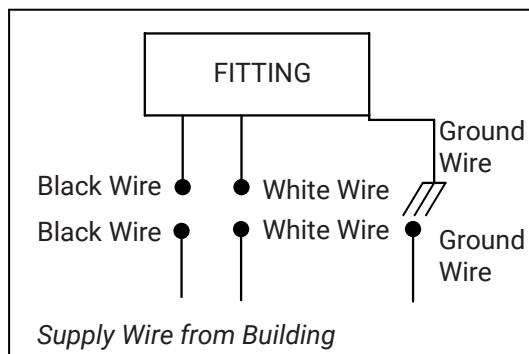


Diagram #2

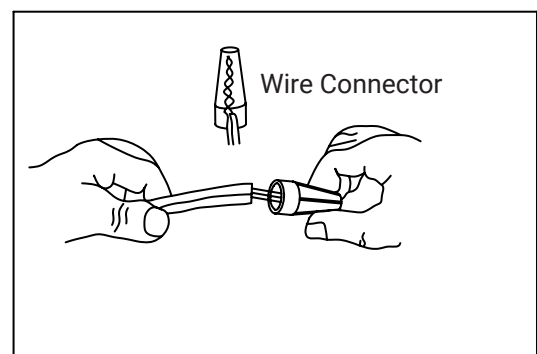

Fovero Wall Sconce

(3) INSTALLATION *Carefully unpack the fixture, layout all parts on a clean surface.*

1. Fasten [B] CROSSBAR to [A] OUTLET BOX with [C] SCREWS
2. Insert [F] NIPPLE into central hole of [B] CROSSBAR
3. Place [H] Fixture against wall, through the [F] NIPPLE to adjust it, so that [F] NIPPLE protrudes 1/4"-5/16" out.
4. Remove [H] FIXTURE, and fasten [G] HEX NUT against [B] CROSSBAR to secure [F] NIPPLE
5. Twist [D] FIXTURE GROUND WIRE and ground wire from outlet box using provided [M] WIRE CONNECTOR
6. Connect [H] FIXTURE wire with supply wire together as per DIAGRAM #1
7. Allowing [F] NIPPLE to pass through the center hole of [H] FIXTURE, secure [H] FIXTURE against the wall by threading [I] LOCK NUT and [O] RUBBER WASHER onto [F] NIPPLE
8. Position [H] FIXTURE, apply [J] CAULKING to outline the outside of [H] FIXTURE where it meets the wall to provide a watertight seal. Leave a small space at the bottom to allow any condensation of moisture to escape
9. Aim the threading of [K] SHADE to the nord socket of [H] FIXTURE, rotate [K] SHADE clockwise to secure [K] SHADE to [H] FIXTURE
10. Turn on electricity after assembling the bulbs to test if the bulbs work

