

Fovero Cord Hung Pendants

(1) ATTENTION

- 1.1 To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- 1.2 All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with the methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 1.3 These fixtures are intended to be ceiling-mounted and must be supported by the building structure.
- 1.4 Do not operate the lighting fixture close to any combustible material.
- 1.5 Ensure that the fitting is cool and switched off before changing the bulb/fixture.
- 1.6 Do not use bulbs exceeding the maximum wattage as marked on the lighting fixture.

(2) CAUTION BEFORE INSTALLATION

- 2.1 Prepare tools and materials required, e.g.: Ladder, Wrench, Wire Cutter, Screw Driver, Bulbs and Wiring supplies as required by electrical code.
- 2.2 Before starting the installation, disconnect the power by opening the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is NOT sufficient to prevent electrical shock.
- 2.3 If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring.
- 2.4 Make sure no rough or sharp edges are in contact with any of the wire, to ensure the insulation on any of the wires has not been damaged during the installation.
- 2.5 The bare or green insulated wire is for grounding, do not connect with current carrying wires.
- 2.6 First, connect the white fixture wire with the white supply wire. Then connect the black fixture wire with the black supply wire. After the fixture wires are connected with the supply wires, the bare parts of the wires need to be completely covered by a connector, to prevent it from causing a short circuit and electric leakage.

Diagram #1


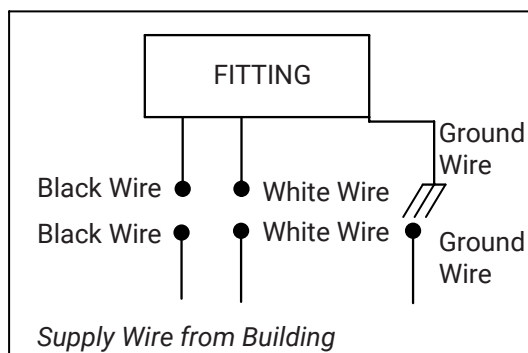


Diagram #2

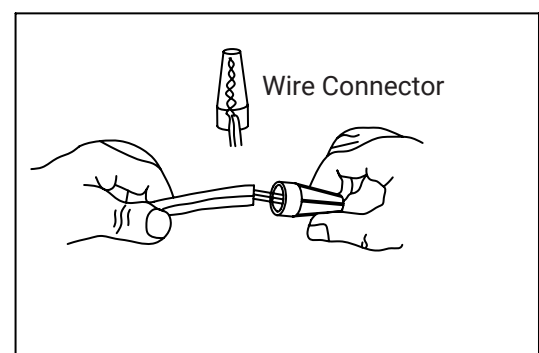

Fovero Cord Hung Pendants


(3) ASSEMBLY

Carefully unpack the fixture, layout all parts on a clean surface.

1. Insert [12] NIPPLE into central hole of [14] CROSSBAR and adjust to suitable length. Fasten [12] NIPPLE in suitable length by [13] HEX NUT. Make sure the nipple will not roll again.
2. Feed the fixture through [5] NUT CAP, [10] CANOPY, [12] NIPPLE and come out from [11] CORD STRAIN RELIEF. Cut & trim any excess wire, leaving enough wire for electrical connections. If you need to adjust the length of the cable, release [11] CORD STRAIN RELIEF first, then adjust the cable to the desired length. Reinstall [11] CORD STRAIN RELIEF.
3. Knot the cord as FIGURE B without [11] CORD STRAIN RELIEF

(4) INSTALLATION

1. [1] OUTLET BOX in the building.
2. Secure [14] CROSSBAR to [1] OUTLET BOX with the supplied [2] SCREWS.
3. Twist [3] FIXTURE GROUND WIRE and ground wire from outlet box. Tighten them using [9] WIRE CONNECTOR (provided)
4. Connect fixture wires with outlet box wire using [4] WIRE CONNECTORS. Carefully tuck all wire connectors into outlet box, and ensure that no wire connectors are loose, or any bare parts are exposed.
5. Screw on [12] NIPPLE to secure [10] CANOPY against the ceiling.
6. Turn on electricity after installing the bulbs to ensure the fixture work as intended.

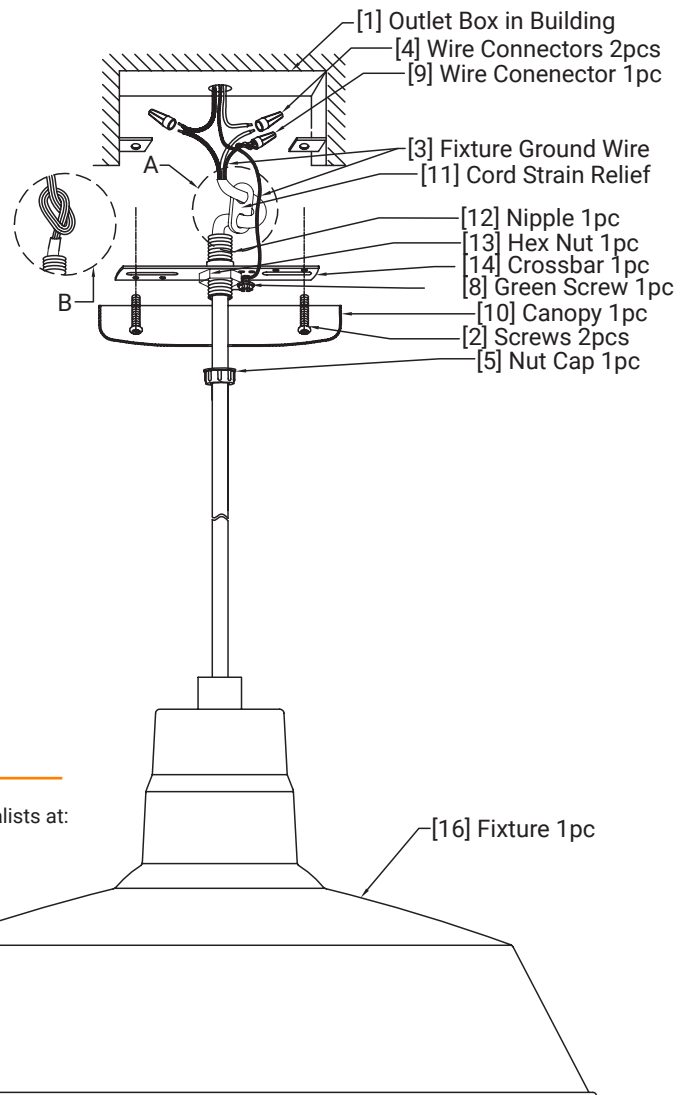

Customer Support

If you may have any questions/concerns, please call or email our lighting specialists at:



T: +1 (813) 649-8899



E: support@htm-lighting.com



To help protect the environment, please dispose of the product properly when it has reached the end of its use. Do not dispose of in household waste. Information on collection points and their opening hours can be obtained from your local municipalities.