




# GameSir Z2 E-sports Wireless Keypad & Mouse Combo

## User Manual

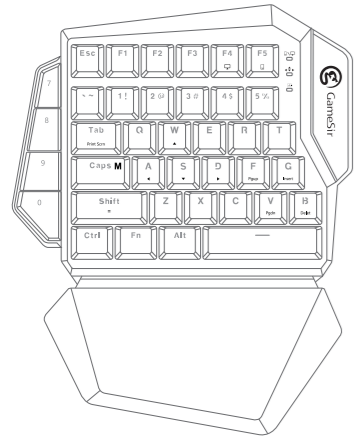

We hope this manual answered all questions you may have. If you have any further questions, please contact us:  
GameSir Facebook: <https://www.facebook.com/myGamesir>  
Twitter: <https://twitter.com/mygamesir>  
Customer Service: [cs@gamesir.hk](mailto:cs@gamesir.hk)

### PRODUCT DESCRIPTION

GameSir Z2 E-sports Wireless Keypad & Mouse Combo contains GameSir Z2 wireless one-handed gaming keypad and GameSir GM180 E-sports wireless gaming mouse. It is compatible with Windows PC/Android through stable 2.4GHz dongle, providing accurate and flexible keypad and mouse control. Built-in with 1000mAh lithium battery, GameSir Z2 wireless one-handed gaming keypad can be connected through 2.4GHz/Bluetooth. The slidable ergonomic palmrest perfectly suits different gestures for a faster control. GameSir GM180 E-sports wireless gaming mouse greatly optimizes aiming accuracy and stability to avoid external mouse's poor compatibility and high consumption.

### PACKAGE CONTENTS

- GameSir Z2 wireless one-handed gaming keypad (with 2.4GHz wireless dongle)
- GameSir GM180 E-sports wireless gaming mouse (with 2.4GHz wireless dongle)
- Micro USB cable (3.28 ft.)
- Detachable and slidable palmrest
- User Manual

### SYSTEM REQUIREMENT

- Windows 7 or above
- Android 4.0 or above
- iOS 10 or above



### REGISTRATION

Register your GameSir ID at <https://gamesir.hk/> to get latest updates about GameSir products and gaming news.

### YOUR BENEFITS



- \* 30 calendar days to return an item from the date you received it.
- \* 12-month replacement with the same model from the date you received it.
- \* Free online technical support at <https://gamesir.hk/>

### DEVICE LAYOUT

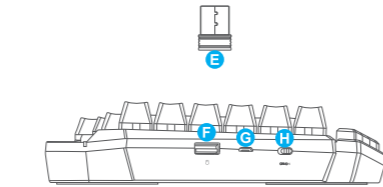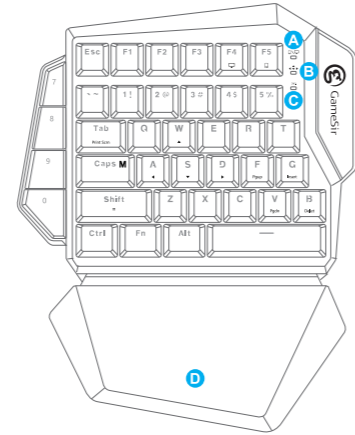

- A** Connection indicator light
- B** D-pad mode switch light
- C** Power light
- D** Detachable and slidable palmrest
- E** 2.4GHz dongle
- F** USB port
- G** Micro-USB
- H** Power Switch

### DEVICE LAYOUT



- A** Left button
- B** Right button
- C** Middle & Roller
- D** DPI Key
- E** Forward
- F** Backward
- G** Mouse skate
- H** Optical sensor
- I** Battery box
- J** 2.4GHz dongle

### Connect PC via 2.4GHz dongle

- Power on GameSir Z2 Keypad.
- Press Fn+F4 to switch to PC mode. The indicator light will flash in green, indicating GameSir Z2 Keypad can be connected.
- Insert GameSir Z2 Keypad's 2.4GHz dongle into Window PC's USB port.
- The indicator light will stay solid green. GameSir Z2 Keypad is successfully connected with PC.
- Insert GameSir GM180 mouse's 2.4GHz dongle into Window PC's USB port.
- Driver will be automatically installed on PC. After installation, GameSir Z2 Combo can work normally.

### Connect Android(4.0 or above) devices

- Turn on Bluetooth of Android device.
  - Power on GameSir Z2 Keypad.
  - Press Fn+F5 to switch to Bluetooth mode. The indicator light will flash in blue, indicating GameSir Z2 Keypad can be connected.
  - Download GameSir World app, enter "GameSir Spirit" > "Searching gamepad", connect the gamepad with your phone via Bluetooth.
  - The indicator light will stay solid blue, GameSir Z2 Keypad is successfully connected with Android devices.
  - Insert GameSir GM180 mouse's 2.4GHz dongle into Window PC's USB port.
  - GameSir Z2 Combo can work normally. Click "Gamepad Test" in GameSir World app to take a test.
- Scan the QR Code or browse the link below to download GameSir World app.



<https://gamesir.hk/gsw>

### COMBINATION FUNCTION KEYS

Equipped with various combination keys, GameSir Z2 Keypad can meet varied gaming demands through perfectly dealing with different types of games and scenes. GameSir Z2 Keypad owns two sets of unique default key layout profiles, which allow you to switch between W/A/S/D mode and D-pad mode by pressing Fn+W.

W/A/S/D mode: indicator light is on.

D-pad mode: power light and D-pad mode switch light are both on.

- Tab** FN+Tab: Print Scrn
- F** FN+F: PgUp
- V** FN+V: PgDn
- G** FN+G: Insert
- B** FN+B: Delete
- Shift** FN+Shift: =
- CapS M** FN+M: Caps Lock
- F1 F2** FN+F1+F2: Bluetooth force pairing: Disconnect current Bluetooth connection for new connection. Invalid after reboot.
- F3** FN+F3: 2.4GHz dongle force pairing

### GAMESIR GM180 MOUSE DPI ADJUSTMENT

GameSir GM180 mouse's default DPI is 1600. Press DPI key at its back to switch 3 levels of DPI adjustment (800/1200/1600).

### AUTOMATIC POWER OFF

When GameSir Z2 Keypad is connected, it will automatically power off within 600 seconds under no operation.

When GameSir Z2 Keypad is disconnected, it will automatically power off within 120 seconds under no operation.

\* When GameSir Z2 Keypad automatically powers off, please switch on and connect again with your devices.

### POWER INSTRUCTIONS

When GameSir Z2 Keypad is connected, power indicator is off.

When GameSir Z2 Keypad is charging or in low power condition (15% and below), power indicator flashes in red.


GameSir • Gaming is Winning.™

© 2018 GameSir Inc. All rights reserved. Product may vary slightly from those pictures.



## GameSir Z2 E-sports ワイヤレスゲーミングキーパッド & マウスコンボ

### 取扱説明書

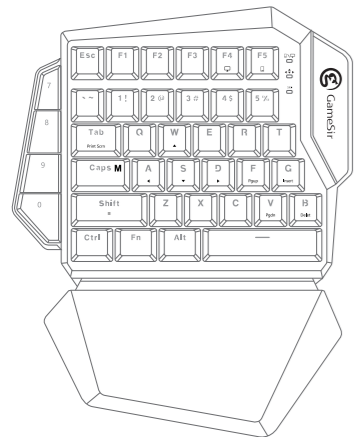

GameSir Facebook: <https://www.facebook.com/myGamesir>

Twitter: <https://twitter.com/mygamesir>

Customer Service: [cs@gamesir.hk](mailto:cs@gamesir.hk)

このたびは、弊社製品を買い上げいただき誠にありがとうございます。  
ご使用になる前に、この取扱説明書をよくお読みのうえ、本品を安全にご使用ください。  
お読みになったあとは、いつでも見られるように、大切に保管してください。

### ⚠️ ご注意:保護者の方へ必ずお読みください。

- 小さな部品がありますので3歳未満のお子様には絶対に与えないでください。
- 乳幼児の手の届くところに置かないでください。万一飲み込んだ場合は、すぐに医師に相談してください。
- 火気のある場所では絶対に使用しないでください。
- 長時間直射日光当てたり、高温となる場所に置かないでください。
- 本品を湿気やホコリの多いところに置かないでください。
- 本品に物を当てたり、落下させるような強い衝撃を与えないでください。
- 故障の原因になりますので、USB端子を直接手で触らないでください。
- ケーブル部を強く曲げたり引っ張ったりしないでください。
- お手入れの際には、乾いた柔らかい布を使用してください。
- ベンジン、シンナーなどの薬品は使用しないでください。
- 分解や修理、改造は絶対に行わないでください。
- 本来の目的以外には使用しないでください。本来の目的以外に使用した場合の事故や損害に対し、弊社は一切その責任を負いません。
- 光学式ライトの光を直接見ないでください。強い光より、目を痛める可能性があります。

\* 品質上の問題または提案がある場合に販売元またはアフターサービス担当者に連絡してください。

### 製品概要

GameSir Z2 E-sports ワイヤレスゲーミングキーパッド(以下「GameSir Z2ゲーミングキーパッド」と言います)とGameSir GM180 E-sportsワイヤレスゲーミングマウス(以下「GameSir GM180ゲーミングマウス」と言います)コンボは、2.4GHzドングルによって、Windows /Androidにて正確でハイフリーなキーボードとマウスのコントロールを実現します。E-sportsレベルメカニカル青軸を搭載し、1000mAhのリチウム電池を内蔵し、2.4Ghzと Bluetooth接続をサポートできます。

GameSir GM180ゲーミングマウスは、精度とバランスを最大幅に最適化され、外付けマウスの互換性など問題を避けるように設計されました。多段階調節可能な人間工学に基づいた着脱式レールパームレストで、プレイヤーを一步早く勝たせます。

### パッケージ内容

- GameSir Z2 ワイヤレスゲーミングキーパッド (2.4GHzドングル付き)
- GameSir GM180 ワイヤレスゲーミングマウス (2.4GHzドングル付き)
- Mirco USBケーブル (1M)
- 着脱式レールパームレスト
- 取扱説明書

### システム要件

Windows7以降/Android4.0以降/iOS10以降

### ユーザー登録


<https://gamesir.hk/>にてGameSir IDを作成して、ご購入の製品を登録すると、当製品の品質保証の状態に関するリアルタイム情報と、GameSir会員専用のメリットを得ることができます。

### 登録による特典

12カ月のメーカー限定保証


<https://gamesir.hk/>でのマニュアルの閲覧と無料オンラインテクニカルサポート (英語/日本語対応)

### 各部の名称

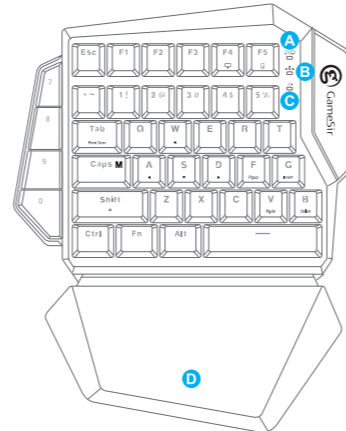

- A** インジケータライト
- B** 方向キーモードライト
- C** スクロールホイール
- D** 着脱式レールパームレスト
- E** 2.4GHzドングル
- F** マウス専用USBポート
- G** Mirco USBポート
- H** 電源スイッチ

### 各部の名称

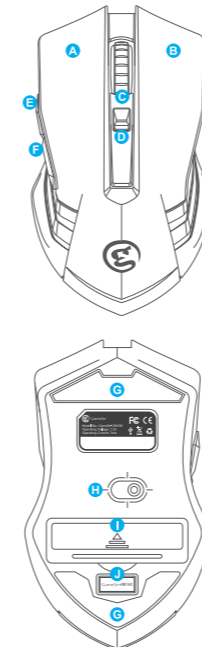

- A** 左マウスボタン
- B** 右マウスボタン
- C** スクロールホイール
- D** DPIステージ調整ボタン
- E** フォワードボタン
- F** バックボタン
- G** テフロンマウスソール
- H** 高精度オプティカルセンター
- I** バッテリーボックス
- J** 2.4GHzドングル

### 2.4GHzドングルでPCへの接続ステップ

- GameSir Z2ゲーミングキーパッドをオンにしてください。
- GameSir Z2ゲーミングキーパッドのFN+F4ボタンを同時に押し、pc接続モードに切り替わります。インジケータライトが緑光で点滅すると、GameSir Z2ゲーミングキーパッドは接続待ち状態に入ります。
- GameSir Z2ゲーミングキーパッドの2.4GHzドングルをPCのUSBポートに差し込んでください。
- インジケータライトが緑光で点灯になりますと、接続成功です。
- GameSir GM180ゲーミングマウスの2.4GHzドングルをPCのUSBポートに差し込んでください。
- PCは自動的に対応するドライバをインストールします。ドライバがインストールされると、GameSir Z2 E-sportsワイヤレスゲーミングキーパッド & マウスコンボを動作できるようになります。

### BluetoothでAndroidデバイス (4.0以降) への接続ステップ

- AndroidデバイスのBluetoothをオンにしてください。
- GameSir Z2ゲーミングキーパッドをオンにしてください。
- GameSir Z2ゲーミングキーパッドのFN+F5ボタンを同時に押し、Bluetooth接続モードに切り替わります。インジケータライトが青い光で点滅すると、GameSir Z2ゲーミングキーパッドは接続待ち状態に入ります。
- Bluetoothで直接に接続 /GameSir World app に入る> GameSir Spiritをタップ> GameSir Z2ゲーミングキーパッドを検索してお使いのデバイスに接続します。
- インジケータライトが青い光で点灯になりますと、接続成功です。
- GameSir GM180ゲーミングマウスの2.4GHzドングルをGameSir Z2ゲーミングキーパッドの2.4GHzドングル専用USBポートに差し込んでください。
- GameSir Z2 E-sportsワイヤレスゲーミングキーパッド & マウスコンボを動作できるようになります。

QRコードをスキャンするか下記のリンクにてGameSirWorldアプリをインストールしてください。



<https://gamesir.hk/gsw>

### コンビネーションキー

様々なコンビネーションキーを装備したGameSir Z2ゲーミングキーパッドは、プレイヤーのニーズを最大限に引き出し、違うタイプのゲームでも対応するように設計されました。更に、特有のダブルモードを備え、使用中にFN+W/A/S/Dで迅速に切り替わります。電源インジケータライトが点灯すると、デフォルトモードになっています。電源インジケータライトと方向キーモードの転換ライトが同時に点灯すると、方向キーモードになっています。

- Tab** FN+Tab: 【Print scrn】
- F** FN+F: 【PgUP】
- V** FN+V: 【Pgdn】
- C** FN+C: 【Insert】
- B** FN+B: 【Delete】
- Shift** FN+Shift: 【=イコール】
- Caps M** FN+M: 【Caps Lock】
- F1 F2** FN+F1+F2: Bluetoothを強制的にペアリングすることで、現行ペアリングしているデバイスの登録を解除して、新しいデバイスに接続できます。
- F3** FN+F3: 2.4GHzドングルを強制的にペアリングします。

### GameSir GM180ゲーミングマウスDPI調節

GameSir GM180ゲーミングマウスのデフォルトDPI値は1600です。  
DPIステージ調整ボタンを押し、3段階のDPI (800/1200/1600) を切り替えます。

### 自動シャットダウン

GameSir Z2ゲーミングキーパッドが接続済みの状態で600秒以上操作されないとき自動的にシャットダウンします。  
GameSir Z2ゲーミングキーパッドが接続なしの状態(接続待ち)で120秒以上接続されないとき自動的にシャットダウンします。  
自動的にシャットダウンした後、もう一度スイッチをオンしてお使いのデバイスに接続してください。

### バッテリー残量説明

GameSir Z2ゲーミングキーパッドが接続状態ではバッテリー残量のLEDインジケータライトがオフになります。  
GameSir Z2ゲーミングキーパッドが充電状態の場合またはバッテリー残量が15%に下回る場合は、バッテリー残量のLEDインジケータライトが赤く点滅します。

GameSir - Gaming is Winning.™ゲームサー、プレイが勝つを。™  
© 2018 GameSir Inc. All rights reserved.  
Product may vary slightly from those pictured.