

DEPLOYMENT GUIDE – Yodock® 2001M

The Yodock® 2001M has been tested pursuant to National Cooperative Highway Research Program (“NCHRP”) Report 350 specifications.


The Yodock® 2001M is a plastic Longitudinal Channelizing Device (“LCD”) used for traffic and pedestrian channelization, road closure, and perimeter security for vertical construction.

The Yodock® 2001M is eligible for FHWA reimbursement as an NCHRP Report 350 TL-3 longitudinal barricade.

When used with the Steel Rail Kit, the Yodock® 2001M is eligible for FHWA reimbursement as an NCHRP Report 350 TL-2 longitudinal barrier.

Features

1. Interlocking Coupler
2. Light Box Recess
3. Fill Cap & Port
4. Drain Hole & Plug
5. Forklift Ports

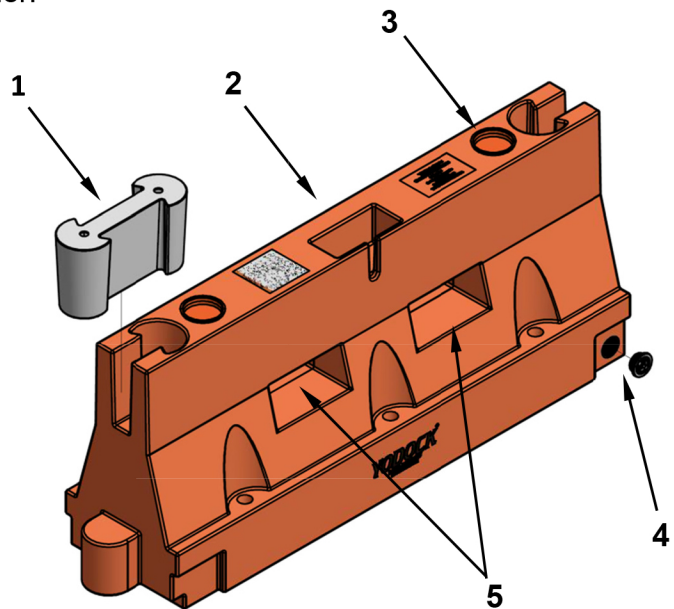

Specifications

- 6' length
- 18" width
- 32" height
- Empty: 85 lbs.
- Full: 750 lbs.

Recommended Tools

- Drain Wrench




FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN PROPERTY DAMAGE OR CAUSE PERSONAL INJURY / DEATH TO PEDESTRIANS AND VEHICLE OCCUPANTS.

Longitudinal Channelizing Device (LCD) Deployment

1. Determine the deployment location of the Yodock® 2001M and follow the instructions of the highway authority or project manager (if available).
2. Deploy the barricades in line with each other and join each unit to the next using an Interlocking Coupler.
3. If a corner connection is required, use the Yodock® 2001M Corner Connector and join it to the adjacent barricade run using an Interlocking Coupler.
 - a. Ensure that Connector Pins are securely in place (see p. 3).
 - b. Use an Interlocking Coupler to connect each side of the Corner Connector to the separate runs of the Yodock® 2001M Barricades.

NOTE: It is not required to fill the Corner Connector with water.

4. Ensure that all Drain Plugs are properly secured.
5. If not already done, remove one (or both) Fill Caps.
6. Completely fill each Yodock® 2001M with water to the top of the Fill Port.
7. Attach Fill Caps to prevent water loss and to keep debris out of the barricade.
 - 1) The LCD may be placed on cross slopes up to 5% (3°). – Figure A
 - 2) The LCD may be placed on longitudinal slopes up to 5% (3°). – Figure B
 - 3) The LCD has the ability to conform to a hill up to 5% (3°). – Figure C
 - 4) The LCD has the ability to conform to a ditch up to 5% (3°). – Figure D

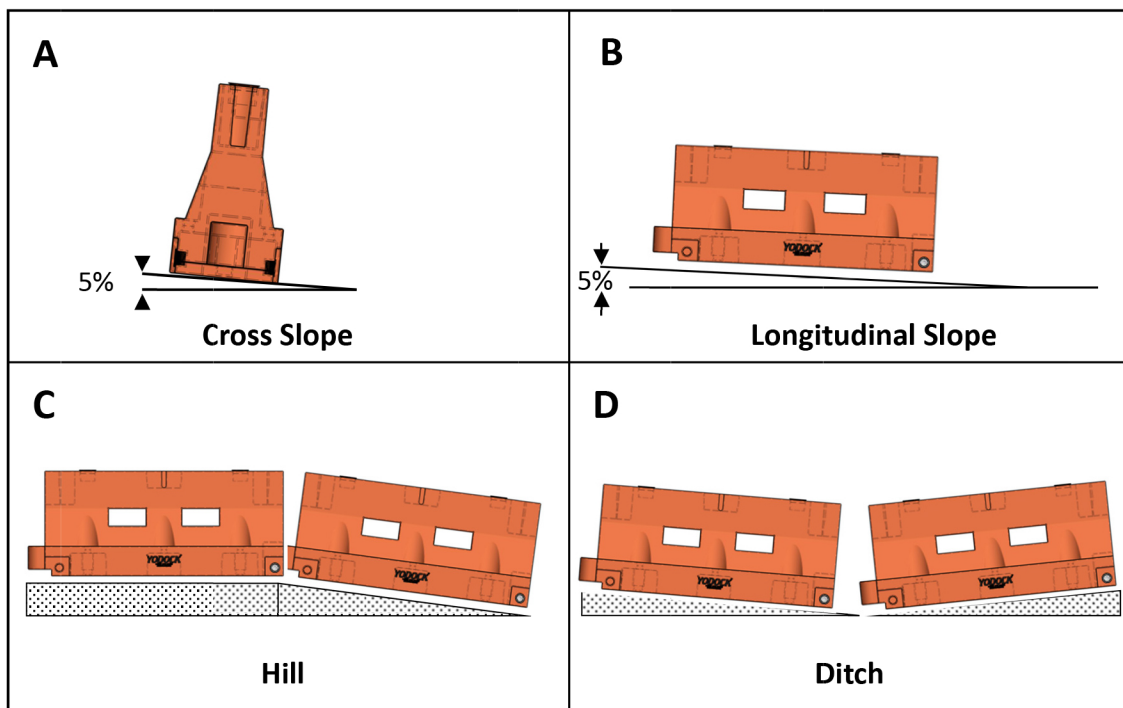


Yodock® 2001M Removal

1. Loosen Fill Caps to facilitate water removal.
2. Remove Drain Plug at base of barricade and let water drain completely.
3. After barricade is empty, attach Drain Plug, Fill Cap, and remove Interlocking Coupler.
4. Empty barricades can now be removed for transport and storage.

Optional Corner Connector Removal

1. Remove the Interlocking Coupler from both sides of the Corner Connector.
2. Slide the Corner Connector away from each barricade run.
3. The Corner Connector can now be removed for transport and storage.

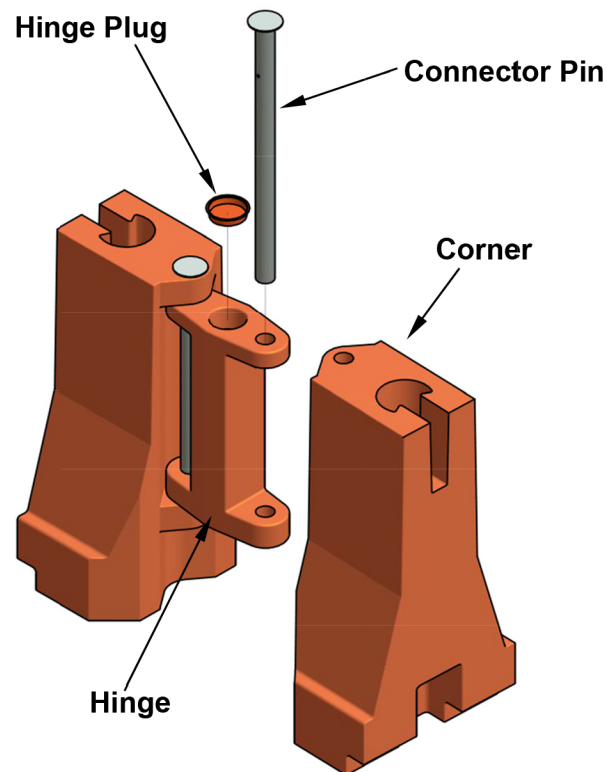

Corner Connector

Longitudinal Barrier (Yodock® 2001M with Steel Rail Kit TL-2)



Important: To be used only with approved Steel Rail Kit (see p. 5).

Deployment

1. Each Rail Kit contains two rails (one for each side of the unit), two Interlocking Couplers, two Connector Channels, and Grade 8 hardware.
2. With two people, place one rail on each side of the unit in preparation to set them in place.
3. With two people, lift the rail and slide the protrusions into the Yodock® 2001M forklift ports. Repeat the process for the other side.
4. Adjust the rails on each side so that the corresponding bolt holes on each rail line up in the forklift ports.
5. Insert the provided Grade 8, 3/4" x 2" bolts through the holes of the protrusions. Use a washer on both the bolt head and nut side of each fastener. Tighten all fasteners with either a standard or pneumatic socket wrench.
6. Units with rails are joined together by a Connector Channel that is bolted to the corresponding holes at both ends of the rails with the provided Grade 8 fasteners.
7. Slide the Connector Channel over the end of the rail with the open end facing out and line up the corresponding bolt holes. Repeat for the opposite side of the unit. Place the provided 3/4" x 5 1/2" Grade 8 bolts through the Connector Channel and rail and attach fasteners. Tighten all fasteners with either a standard or pneumatic socket wrench. **Be sure to use a washer on both the bolt head and nut side of each fastener.**
8. Slide the adjoining unit with rail into the attached Connector Channel and align all bolt holes. Insert the provided 3/4" x 5 1/2" Grade 8 bolts and tighten the Connector Channel fasteners with either a standard or pneumatic wrench. **Be sure to use a washer on both the bolt head and nut side of each fastener.**
9. Refer to the local authority's traffic control plan for proper deployment.


NOTES:



1. The beginning length of need for the Yodock® 2001M with Steel Rail Kit is 42'.
2. When deployed, the system with the Steel Rail Kit may present a blunt-end road feature to oncoming traffic. Consult local highway authority on an appropriate procedure to shield the blunt end or taper the end of the system out of the clear zone.

Note: For steps 3 – 6 refer to page 6.

3. The LCD may be placed on cross slopes up to 5% (3°). – Figure A
4. The LCD may be placed on longitudinal slopes up to 5% (3°). – Figure B
5. The LCD has the ability to conform to a hill up to 5% (3°). – Figure C
6. The LCD has the ability to conform to a ditch up to 5% (3°). – Figure D

STEEL RAIL KIT COMPONENTS

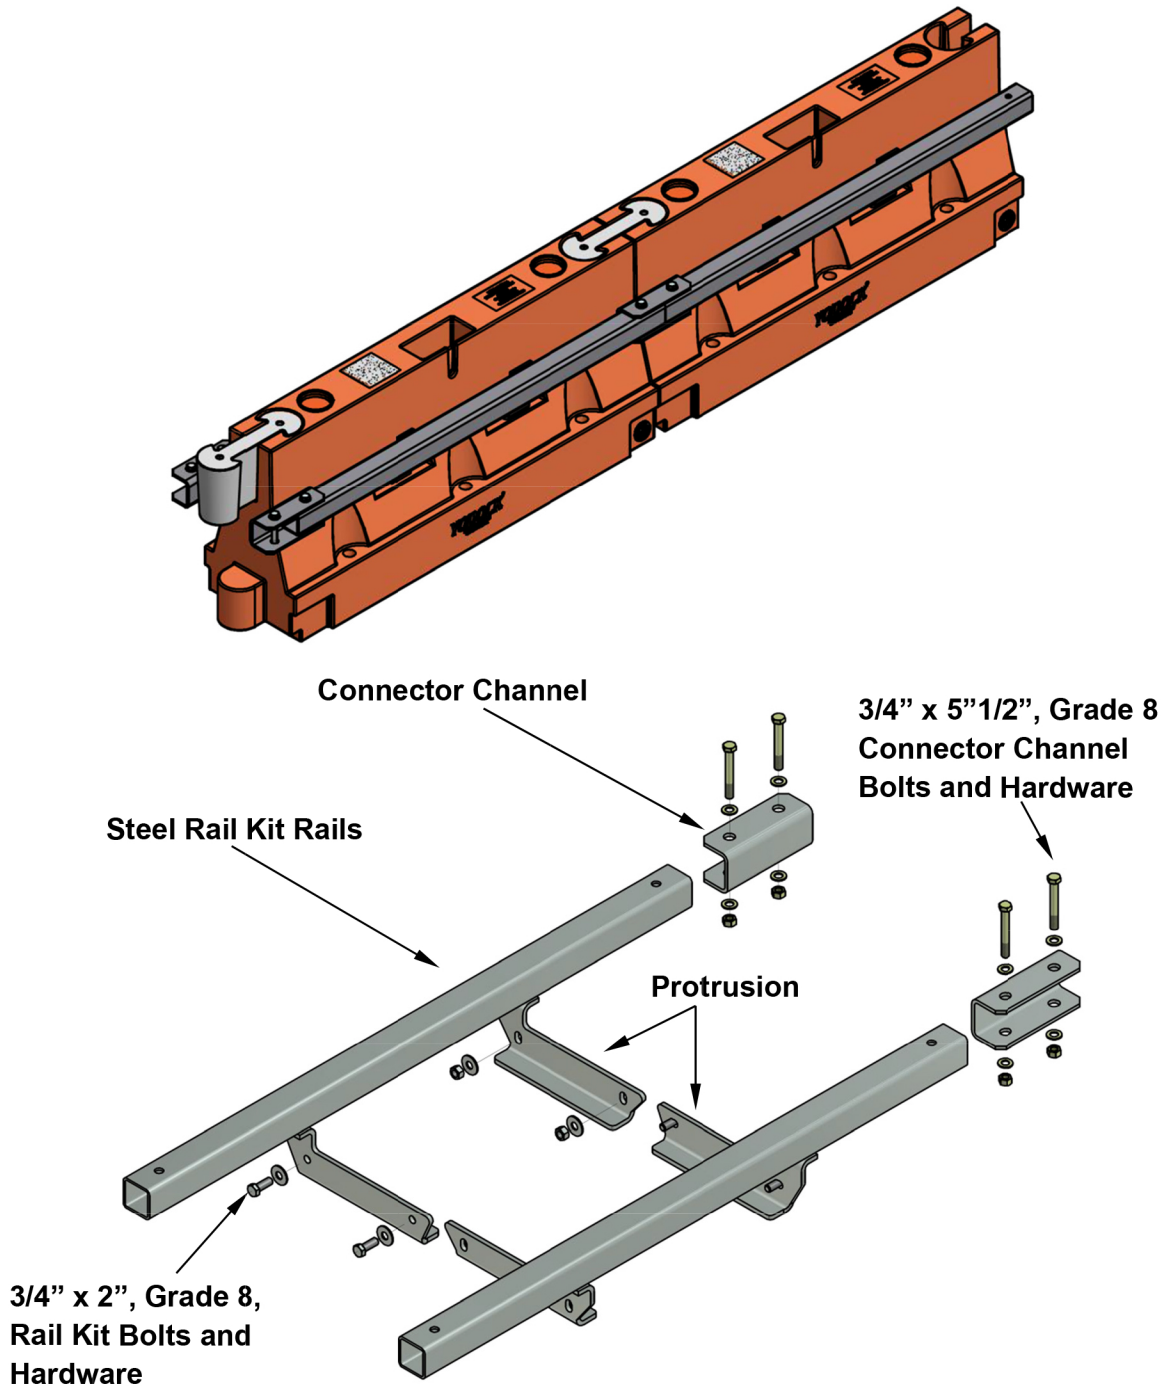

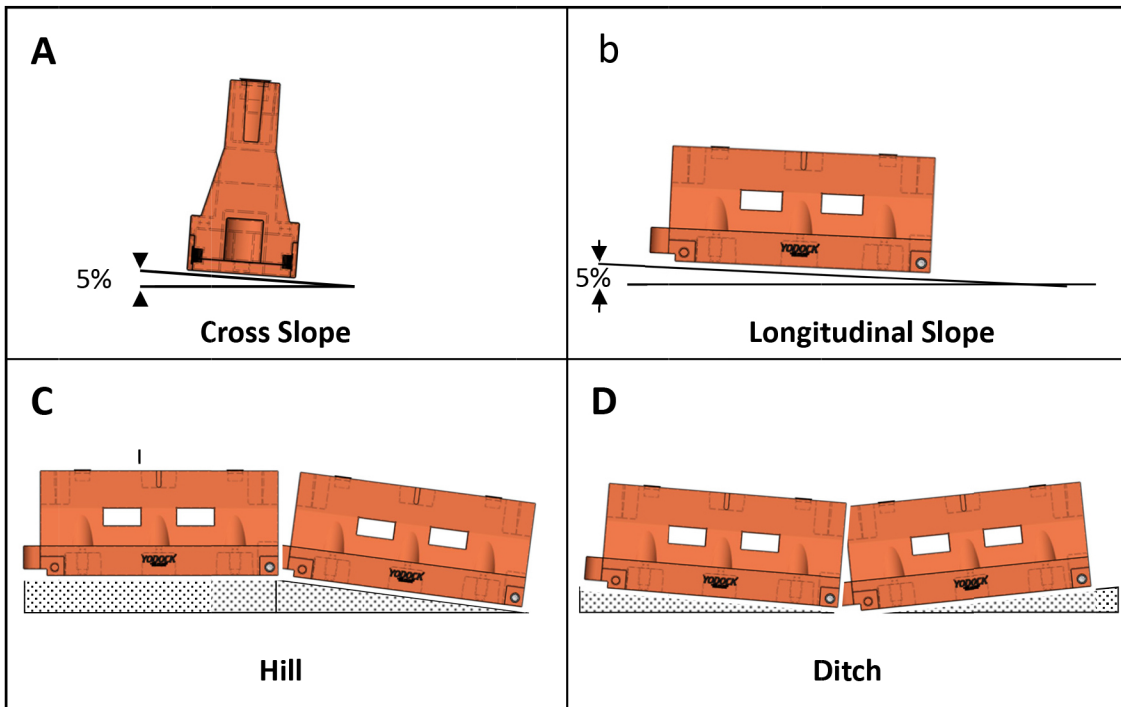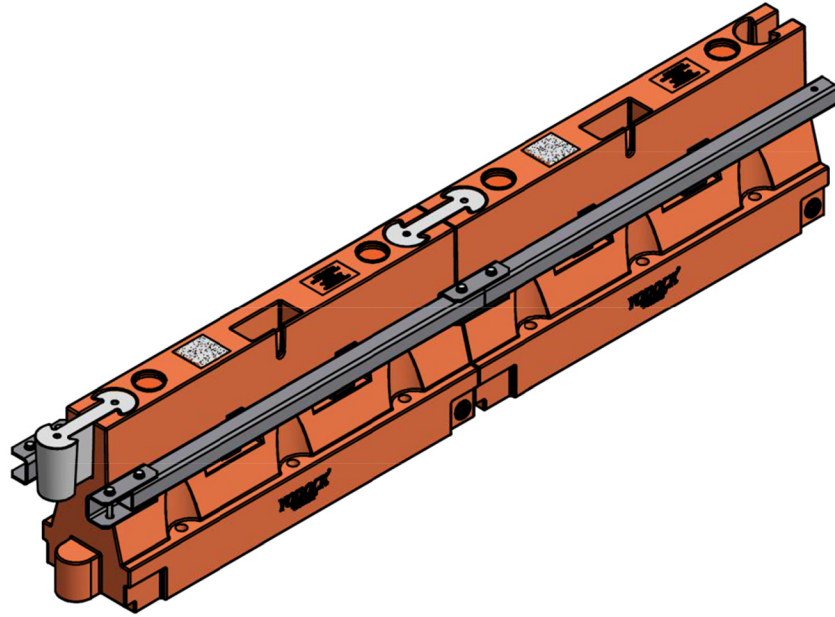

Removal

1. Remove the 3/4" x 5 1/2" bolts from Connector Channel – retain for possible reuse.
2. Remove the Connector Channel from the steel rails – retain for possible reuse.
3. Remove the 3/4" x 2" bolts that hold the two Steel Rail Kit halves together – retain for possible reuse.
4. With two people, lift the rail and slide the protrusions out of the fork lift ports of the unit. Repeat the process for the other side.

Perimeter Security with Fence Panel Deployment




Warning: The Yodock® 2001M with Fence Panels should only be deployed on level ground.

1. Position each Yodock® 2001M in line with the next using an Interlocking Coupler.
2. If a connection is required to make a corner, use the Yodock® 2001M Corner Connector and join it to the adjacent Yodock® 2001M Barricade run using an Interlocking Coupler (see p. 3).
3. Ensure that all Drain Plugs are properly secured.
4. Remove both Fill Caps.
5. **Completely fill each Yodock® 2001M Barricade with water to the top of the fill port. Failure to completely fill the barricades could result in unwanted tipping of the system.**
6. Slide Rubber Grommets onto each Fence Panel Post. With two people, lift the Fence Panel on top of the barricade and place the Fence Panel Posts into the fill holes. The posts should seat firmly in the base of the barricade with the Rubber Grommets snug in the fill holes. The chain link mesh should be faced out from the barricade.
7. Interconnect the Fence Panels using two (2) Fence Panel Clamps, each one approximately 12" from the top and bottom of the Fence Panel.
8. **If a wind or debris screen is required, attach the screening to the top and bottom of the Fence Panel Rails using approved plastic zip ties to secure all screen grommets.**



Danger: Do not attach debris or wind screens (or remove if already in place) if wind gusts are expected to exceed 45 mph. Failure to do so may result in tipping of the system that could cause property damage, personal injury or death to pedestrians and vehicle occupants.

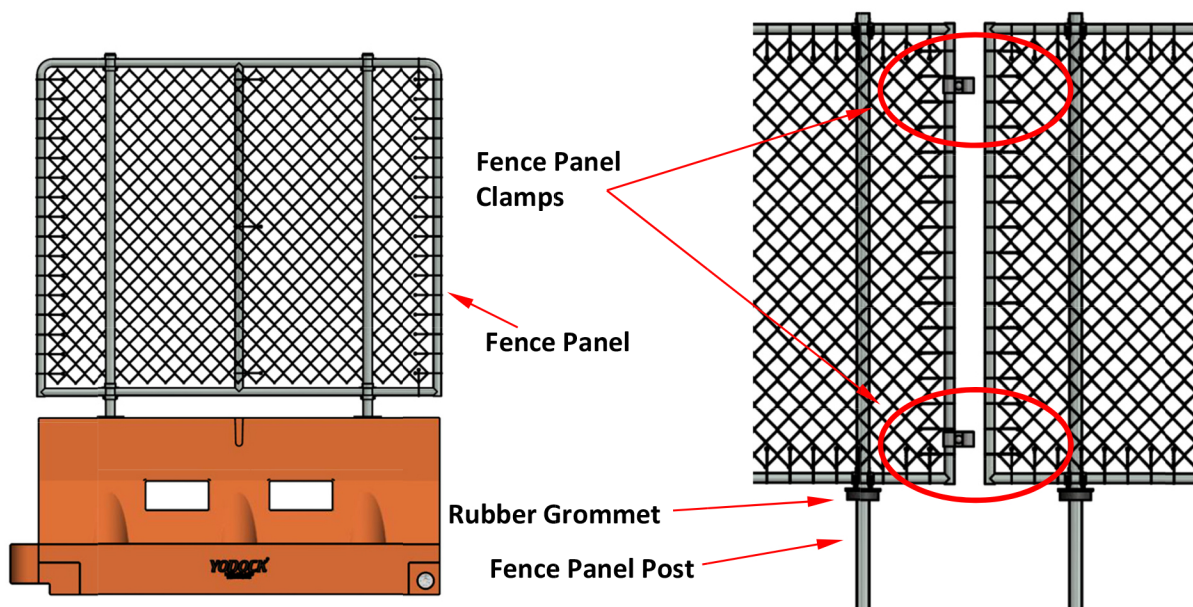

Perimeter Security with Fence Panel Removal

1. Remove wind or debris screens (if attached).
2. Remove Fence Panel Clamps.
3. With two people, lift the Fence Panel out of the barricade and place on the ground. Remove and retain each Rubber Grommet.
4. Remove Drain Plug at base of each barricade and let water drain completely.
5. When barricade is empty, attach Drain Plug, Fill Caps and remove Interlocking Coupler.
6. Empty barricades and Fence Panels can now be removed for transport and storage.

Cold-Weather Environments and Anti-Freeze Recommendations

1. Choose the level of freeze point protection anticipated.
2. Choose the anti-freeze agent from the charts below.
3. Use the appropriate anti-freeze agent when filling the Yodock[®] 2001M.

Chart 1 Anti-Freeze Chemicals - Mix per Section						
Yodock Model		2001M				
Required Freezepoint Protection		20° F	10° F	0° F	-10° F	-20° F
Dry Material (lbs)	Calcium Chloride (CaCl ₂)	66	99	119	145	159
	Calcium Magnesium Acetate (CMA)	106	145	178	205	218
	Magnesium Chloride (MgCl ₂)	59	86	106	119	132
	Potassium Acetate (Kac)	59	132	165	198	225
	Sodium Chloride (NaCl ₂)	66	97	170	N/A	N/A
Liquid Material (gal)						
	Ethylene or Propylene Glycol	14	20	26	31	35

Chart 2 Anti-Freeze Chemicals - Bulk Mix						
Freezepoint Protection		20° F	10° F	0° F	-10° F	-20° F
Dry Weight (lbs)	Calcium Chloride (CaCl ₂)	0.8	1.2	1.5	1.8	2.0
	Calcium Magnesium Acetate (CMA)	1.3	1.8	2.2	2.6	2.7
	Magnesium Chloride (MgCl ₂)	0.7	1.1	1.3	1.5	1.7
	Potassium Acetate (Kac)	0.7	1.7	2.1	2.5	2.8
	Sodium Chloride (NaCl ₂)	0.8	1.0	1.7	N/A	N/A
Mix Ratio with Water						
	Ethylene or Propylene Glycol	17%	25%	33%	39%	45%

Note: Use of the above antifreeze agents does not guarantee freeze prevention.

1. For those mixtures that may be slick, if a spill occurs, the solution should be washed away with large amounts of water and the area sanded to prevent skidding.
2. Before an antifreeze solution is chosen, the user should check local ordinances regarding environmental requirements.