




AI Theta Hub

UVC-AI-Theta-Hub

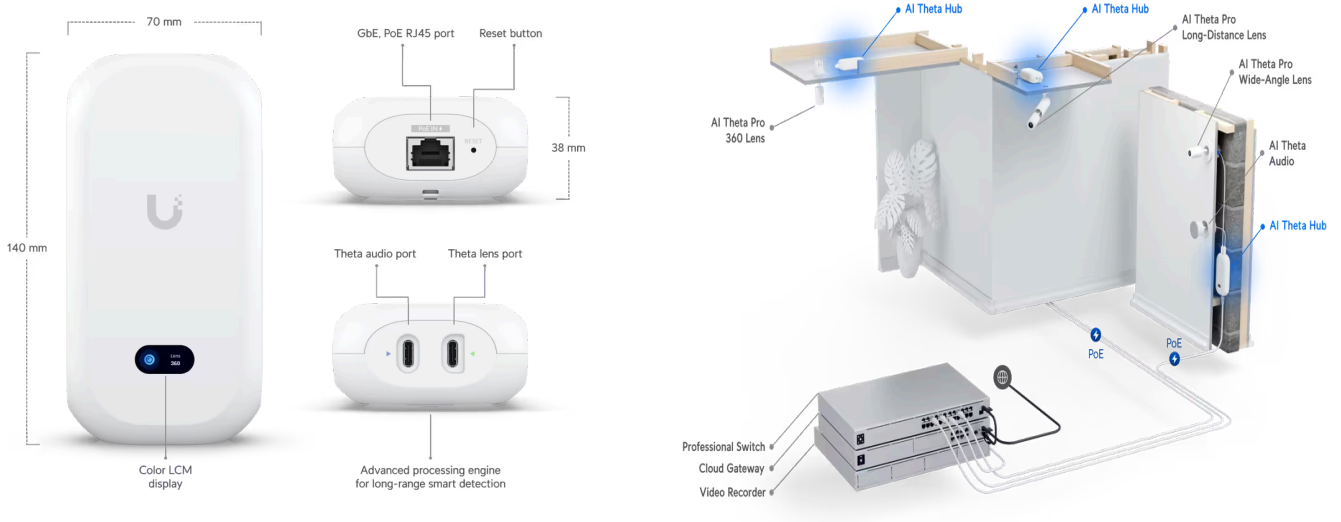

Mechanical

Dimensions

140 x 70 x 38 mm (5.5 x 2.8 x 1.5")

Weight

UVC-AI-Theta-Hub: 330 g (11.6 oz)
UVC-AI-Theta-Hub Mount: 35 g (1.2 oz)

Enclosure material

Aluminum alloy

Mount material

Aluminum alloy

Video

Video compression

H.264

Image settings

Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Processor

Quad-core Arm® Cortex®-A53 based chip

Networking interface

GbE RJ45 port

Max. power consumption	12.5W
Power method	PoE
Supported voltage range	37—57V DC
Output power	5V DC, 1A per port
Display	0.96" color display
Button	Factory reset
Mounting	Wall, ceiling mount
Ambient operating temperature	-20 to 40° C (-4 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Software

UniFi OS application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™