



Euro Wall Down Lite

Cat. No. EDL

Cat. No. EDL/R

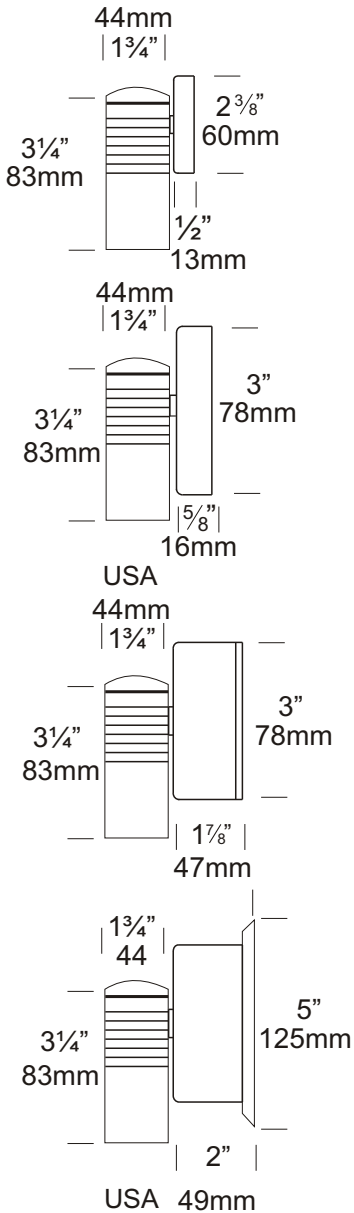

The Euro Wall Down Lite is a wall-mounted luminaire with a fixed head to give a dramatic wash-lighting effect on walls - it can be directed either downwards or upwards. Hunza™ Euro fixtures use miniature MR11 lamps to achieve a contemporary, discreet appearance but are still able to provide excellent illumination.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

Ordering Information

Luminaire Type	Material	Accessories
EDL - Euro Wall Down Lite	COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit /R - Retro™ Transformer 110/240-12 volt LENSEURF - Frosted Lens WBAP - Wall Box Adaptor Plate (12 volt Luminaire)
		For LED options, refer to page 10.4.5 (2 watt MR11) or http://hunza.co.nz/l.html
Ordering Example: EDL COP - Euro Wall Down Lite in Copper EDL/R SS - Euro Wall Down Lite Retro™ in 316 Stainless Steel WBAP - Wall Box Adaptor Plate (Accessories ordered separately)		

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

Body:

Copper 45.4mm (1¾") rod.

Base:

Copper hand spun 2mm (1/8")

Body:

316 Stainless Steel 45.4mm (1¾") rod.

Base:

Investment cast and CNC machined.

Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro™ luminaire (110/240-12 volt): a mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

Features

Lens:

6mm (¼") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

Lifetime Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU4 - 350°C (662°F) ceramic multi contact lamp holder with 180°C (356°F) silicone cables.

Accessories:

Cable Joint Kit (Cat. CJK150)
Not approved for USA/Canada.

Frost Lens (Cat. LENSEURF).

Retro™ transformer 110/240-12 volt (Cat. /R).

Wall Box Adaptor Plate (Cat. WBAP)
12 volt luminaires USA/Canada).

Standards

IP66 AS/NZS 61046



UL1838

Luminaire Weight

12 volt

Cop .465kg (1lb)

SS .480kg (1lb 1oz)

Retro™

Cop .960kg (2lb 1oz)

SS 1.035kg (2lb 4oz)

Power Supply

HUNZA™ Inground or Wall Mount
Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer:
not included

RETRO™

HUNZA™ 110/240-12 volt ac
potted electronic transformer
built into the Retro™ base.

Dimmable with a suitable dimmer.

*Note see page 9.4 for details.

Lamp Type



MR11 GU4 - 1 x 20 watt lamp max.

LED - Refer to previous page.

USA and Canada:

MR11 GU4 - 1 x 10 watt lamp max.

LED - Refer to previous page.

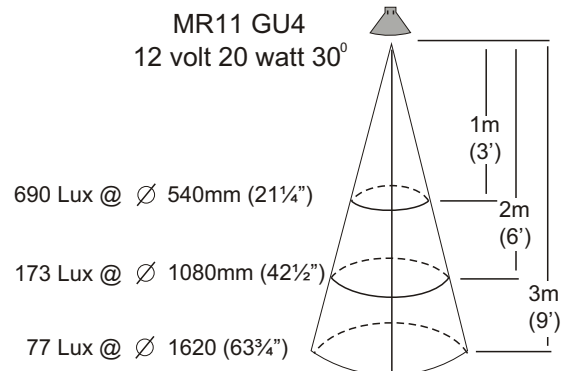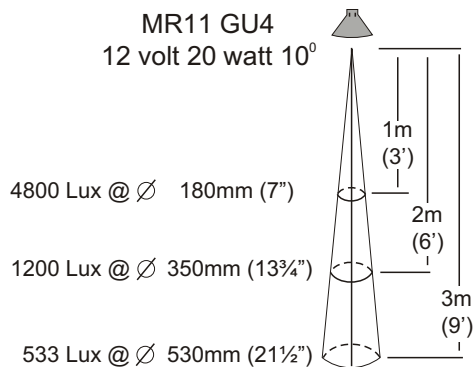

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz


INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4

Euro Wall Down Lite

Cat. No. EDL/L

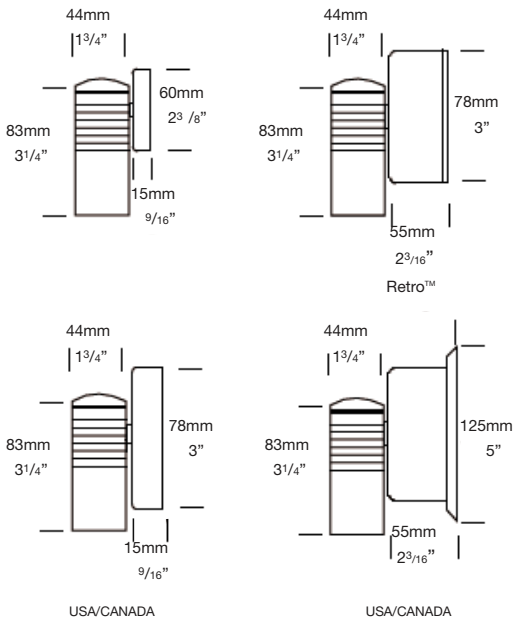

PURE LED
Pure Performance

The Euro Wall Down Lite is a wall-mounted luminaire with a fixed head to give a dramatic wash lighting effect on walls - it can be directed either downwards or upwards. Hunza Euro fixtures have a contemporary, discreet appearance but are still able to provide excellent illumination.

This luminaire is machined from natural copper or solid 316 stainless steel. It features an extra clear, low iron tempered flush lens and high temperature silicon gaskets.

The Hunza PURE LED system uses Cree MT-G 2 chips for maximum performance and long life. Power supply options include a choice of integral 12 or 120/240 volt (Retro) drivers. There is also an external remote (series connection) driver option. The PURE LED system incorporates Hunza's Plug and Play system for easy replacement of the LED engine. Four beam angles, and a choice of a Warm or Cool White colour temperatures are available.

*At 350mA this fixture is the equivalent of a 25watt halogen

*At 700mA this fixture is the equivalent of a 35watt halogen

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
EDL/L	S - Series	15 - 15° TIR Lens	2 - 2700K	CJK150 - Cable Joint Kit	COP - Copper
	D3 - 12v/350mA	25 - 25° TIR Lens	3 - 3000K	EURF - Frosted Lens	SS - 316 Stainless
	D7 - 12v/700mA	38 - 38° TIR Lens	4 - 4000K	WBAP - Wall Box Adaptor	
	D10 - 12v/1050mA	60 - 60° TIR Lens	39 - 3000k		
	R - 110 or 240v Retro		(90+ CRI)		

Ordering Example: EDL/L S 15 3 CJK150 BK

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Copper

Body: 45.4mm (1¾") copper rod.
Base: Copper handspun 2mm (⅛)

Stainless Steel

Body: 45.4mm (1¾") 316 stainless steel rod.
Base: Investment cast and CNC machined.

Luminaire Weight

12 volt	Cop .465kg (1lb)
	SS .480kg (1lb 1oz)
Retro™	Cop .960kg (2lb 1oz)
	SS 1.035kg (2lb 4oz)

Features

Lens:

6mm (15/64") extra clear low iron flush fit shatter resistant glass.
Lifetime Warranty.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories:

Cable Joint Kit (Cat. CJK150)
Frosted Lens (Cat. EURF)
Wall Box Adaptor (Cat. WBAP)

Mounting

The luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 Junction boxes for USA/Canada.

Retro™ luminaire (110/240volt):
A mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED (per head)

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 600 lm at 1050mA

Lumens Per watt: 85 minimum

CRI Warm White (3000k): 85+

Colour Temp: 2,700, 3,000 or 4,000K

High CRI Option (3000K): 90+
(lumen output decreases by 15%)

Power Supply

Series (Remote) Driver (per LED)

Constant current driver
LED requirements: 6vdc at 1050mA maximum

Integral 12 Volt Driver


Hunza™ Plug and Play Driver
Input: 12vac, 14 watt total Output: 350 / 700 / 1050mA
(1050mA limited ≤ 40° ambient temperature in Stainless Steel)

Transformer


Hunza™ Wall Mount Transformer for use with integral 12 volt driver

Retro 110 or 240 Volt Driver
Hunza™ Retro Driver
Input: 120 or 240vac, 10 watt total
Output: 700mA
0-10 volt dimming
(USA - non dimming)


Reflector Beam Angles



15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.