

XSCREEN

15.6" Touch
Portable Monitor

USER MANUAL

Model: XSC-1015TP



Lexuma Limited
Unit 1903, 19/F Podium Plaza
5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
www.lexuma.com
info@lexuma.com

LEXUMA
Designed in Hong Kong
Assembled in China

PRODUCT DESCRIPTION

Thank you for purchasing XScreen, 15.6" Touch Portable Monitor. It is especially designed for an external display for your mobile device. It gives you the freedom to work or to play via an external display remotely and efficiently even if you only have your laptop / mobile with you.

PRODUCT SPECIFICATIONS

Model : XSC-1015TP
Dimension : 356 x 224 x 9mm
Weight : 700g
Screen size : 15.6"
Screen pixel : 1920RGB * 1080P
Screen proportion : 16:9
Power input : Type-C
Data Ports : Type-C, Mini HDMI
Video / Sound Ports : Type-C, Mini HDMI

PACKAGE CONTENTS


- Monitor
- Mini HDMI to HDMI
- Type-C to Type-C
- USB to Type-C
- User Manual

NAVIGATION

Please refer to the diagram for button usage:

6. M : Menu
7. + : Select
8. - : Back

After entering the menu via press "M", please use button + / - to navigate through the menu and use "M" to confirm selection. Long press "-" button will exit the menu.

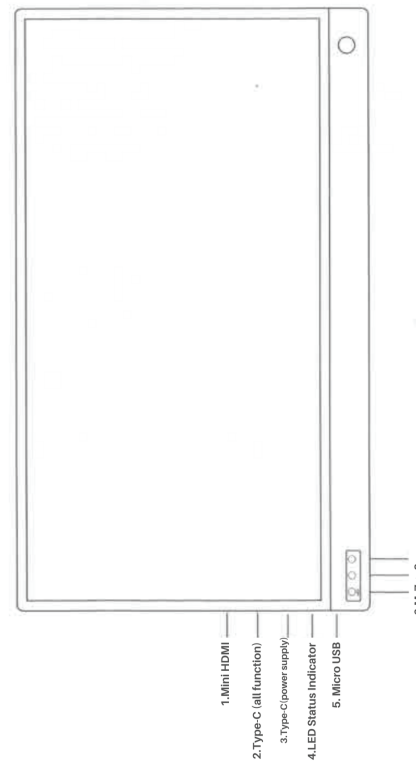

BUTTON USAGE

Adjust Picture settings: Press M twice for entering into Picture settings, then press +/- to select option and adjust
Adjust volume: Press + button without entering Menu

CONNECTION

1. Mini-HDMI port: supports all HDMI signals
2. Type-C port: support all functions from computer and mobile device. Support bi-directional signals and power supply
3. Type-C port: support power supply only
4. LED Status Indicator
5. Micro-USB port: support all USB devices, such as mouse, keyboard, USB flash

LED STATUS

Red: Powered on but no signals
Blue: Powered on and signals detected
No light: No power


ORIENTATION

1. Under Menu, go to Display (rotation) option
2. For connection with computer, only 180 degree rotation option is available.


MENU

Following options are available in the menu:
Picture settings: Brightness, Backlight, Contrast, Sharpness
Display settings: Auto adjust, Disp Rotate, Disp Latency
Color setting: Color Effect
Advance settings: Ratio, Over-scan
Audio settings: Volume, Mute, Audio Source
Others and Info

CONNECTING XSCREEN (TYPE-C)

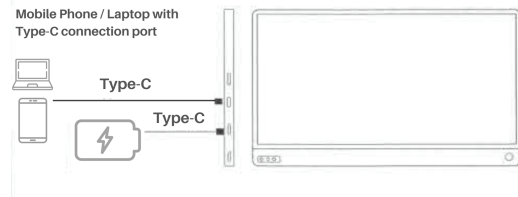

CONNECTING XSCREEN (HDMI)

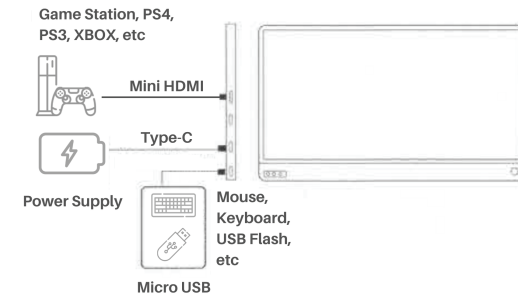

Please ensure Type-C charging port is connected to power source under HDMI settings since power source is supplied via Type C connection only.

NOTE:

Please connect all ports accordingly. If no data signal is detected, RED LED light will be on.

TROUBLESHOOTING (FAQ)

Problems	Possible Solution
Adjust Picture settings	Press 'M' twice for entering into Picture settings, then press +/- to select option and adjust.
Adjust volume	Press + button without entering Menu
Different colors of LED lights	Red: Powered on but no signals Blue: Powered on and signals detected No light: No power
Showing 'No Signal' after connection	You need to make sure your devices is capable with our portable monitor, and it is not running out of battery. Check whether you have connected to the right connection port. If you are using a Type-C cable for both power supply and display signal, you should use the one near the HDMI connection port.
I have connected my iPhone with a Type-C cable but the screen cannot detect the signal	iPhone is not able to connect XScreen with Type-C connection port. ALL iPhone need to get an HDMI converter for display signal even there is an Type-C connection port on your iPhone. *Note: XScreen cannot support touch screen function with iPhone.
Do I need to bring a charging adapter for launching XScreen?	You can charge XScreen with the charging adapter or simply use a power bank to power up. Your connected device also able to power up XScreen.
I cannot use the touch screen function.	The touch screen function cannot be activate under HDMI connection. You need one more USB to Type-C cable for activate the touch screen mode. *Only Window 10 or above can support the touch screen function.
I cannot connect my laptop with XScreen.	1. Check with your device whether it can support Type-C data output. 2. If yes, check whether you have connected with the right Type-C connection port (Please refer to the previous page for connection) 3. If your device dose not support Type-C data output, you should use HDMI cable for connection.
The speaker is not working when connecting with computer.	Please check the audio output of your computer for the setting. Select XScreen as the audio output of your computer.

LEGAL LIABILITY

This product is designed to use with appropriate electronic devices only. Please check with your device user manual or the manufacturer to determine whether your particular device is compatible with this product. Lexuma is not responsible for any damages to any electronic devices in conjunction with the use of the product.

Lexuma shall not in any means be liable to you or to any third party for any damages you or any third party may suffer as a result of use, intended or unintended, or misuse of this product in conjunction with any devices or accessories other than the appropriate electronic devices which this product is designed for. Lexuma will also not be responsible for any damages you or any third party may suffer as a result of misuse of this product as mentioned above.

CAUTION

Read all instructions and warning prior to using this product. Improper use of this product may result in product damage, excess heat, toxic fumes, fire or explosion, for which will invalidate the warranty, and may cause personal loss which Lexuma will not be liable for.

- 1) Do not dispose of the product in fire or water
- 2) Do not attempt to open or disassemble
- 3) Do not expose to extreme temperature
- 4) Do not crush, incinerate or short contacts
- 5) Do not change or modify the product
- 6) Do not use any corrosive cleaners
- 7) Do not dispose of the product with general waste, return it to the recycling collection point
- 8) Do not push the Button with excessive force

MORE INFO ON LEXUMA

Please visit our website (www.lexuma.com) for more information on XScreen.

If there is any damage to the product such as punctures, tears, dents, deformations, or corrosion due to any cause, stop using the product immediately and dispose of the product appropriately at your local recycling point.

LIMITED WARRANTY

Lexuma warrants that the product to be free from defects in material and workmanship under normal use for 1 year, starting on the date of the original invoice. The original serial number label affixed on the package and the original invoice must be presented at the time you require warranty service; otherwise, such warranty will be voided.

This limited warranty will automatically be voided if:

- 1) The serial number of the product has been modified, removed, or does not match that given on the original invoice.
- 2) Damage or malfunction as a result of, but not limited to, accident, misuse, power surge, fire, water, or other acts of nature, product modification, or failure to follow instructions supplied with the product.
- 3) The alleged condition as a result of, but not limited to, neglect, unauthorized or improper alterations, repairs, improper care, accidents, disaster, weather, or transportation.

In case the warranty does not apply, a repair of replacement charge will be incurred. The customer shall be responsible for sending the defective product to and collecting the repaired or replaced product from the service centre.

