

### LIGHT MODES

#### **ON – PIR Sensor Override Mode**

This setting overrides the built in sensor and your light will automatically turn on at dusk at 70% total brightness until the battery either runs flat or daylight is sensed

#### **P - PIR Sensor Mode**

This setting puts your light into sensor mode where by any movement detected will trigger the light to perform at 100% for approx. 1 minute. At all other times an ambient soft glow is emitted

**OFF - Light is manually switched off and will not operate but will still charge – Do not leave in this setting for any extended period of time, 72hrs maximum**




### INSTALLATION METHOD

1. Remove contents from packaging

**NOTE:** Before continuing, we recommend you place your light direct sunlight (with the switch in the “OFF” position) for 2 days before installation

2. Make sure to switch your light head to the mode you wish to operate in before installation (**FIGURE 3**)
3. Using the supplied Nuts & Bolts, fix the post base mount in your desired location
4. To connect the 4 part post - start with the bigger pieces on the bottom. Twist them into each other clockwise to tighten. Work towards the smaller pieces at the top (**FIGURE 1**)
5. To connect light head to the post top, twist the light head into the adapter (**FIGURE 2**)

**FIGURE 1**

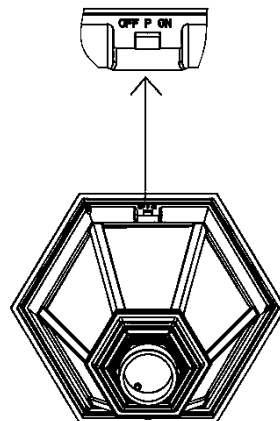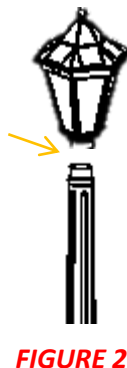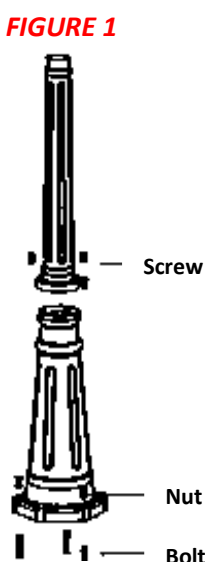

**FIGURE 3**



### IMPORTANT NOTES

- **Please ensure you place your solar panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

### TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	Charge the light in direct sunlight for 1-2 days then check again
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel
		1. Access the light and replace battery 2. Battery has matured	Contact SLD Customer Service to buy new batteries