



# INSTRUCTION GUIDE

## Residential Wall Light

Model No. SLDWL0007A-PIR, SLDWL0008A-PIR, SLDWL0009A-PIR, SLDWL0012A-PIR, SLDWL0018A-PIR



### LIGHT MODES

#### ON – PIR Sensor Override Mode

This setting overrides the built in sensor and your light will automatically turn on at dusk at 70% total brightness until the battery either runs flat or daylight is sensed

#### P - PIR Sensor Mode

This setting puts your light into sensor mode where by any movement detected will trigger the light to perform at 100% for approx. 1 minute. At all other times an ambient soft glow is emitted

**OFF - Light is manually switched off and will not operate but will still charge – Do not leave in this setting for any extended period of time, 72hrs maximum**

### INSTALLATION METHOD

1. Remove light fitting from packaging

**NOTE:** Before continuing, we recommend you put your light in direct sunlight (with the switch in the “OFF” position) for 2 days before installation

2. Locate a position where your light will receive maximum direct sunlight throughout the day.
3. Make sure to switch your light head to the mode you wish to operate in before installation. **(FIGURE 2).**
4. Using the supplied Nuts & Bolts, fix the wall mount base in your desired location
5. To connect light head to the top of your wall mount top, twist the light head into the connector, then screw into the wall mount base. **(FIGURE 1)**

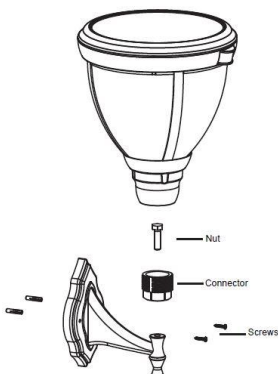


FIGURE 1




FIGURE 2

### IMPORTANT NOTES

- **Please ensure you place the Solar Panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified.
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

### TROUBLE SHOOTING

| Phenomenon   | Cause                        | Inspection Method  | Solution  |
|--|------------------------------|--|---|
| Light won't turn on                                | Switch hasn't been turned on | Determine what position the switch is in   | Turn the switch on  |
|  | Battery has run flat         | Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight                                  | Charge the light in direct sunlight for 1-2 days then check again   |
| The light only stays on for a short amount of time | Low Battery                  | 1. Bad installation site for the solar panel<br>2. Dust or leaves are covering the panel<br>3. Long period of overcast weather | 1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again<br>2. Clean the solar panel |
|  |                              | Battery Failure  | 1. Access the light and & replace battery<br>2. Battery has matured   |