


## FITMENT AND WASHING INSTRUCTION

**NOTICE: DO NOT INSTALL COVER IF EXHAUST PIPE IS HOT**


**NOTICE :DO NOT TOW VEHICLE WITH COVER ON**



1. Put cover on the vehicle seat. Adjust cover on the windshield by aligning upper stitch along windshield edge. Adjust cover to wrap around the mirrors and handle bar.

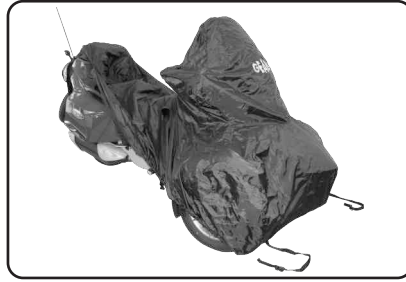

2. Adjust cover to wrap the front bumper and front wheels. Pull the rest of the cover on the back seat (Going over the back seat rest). Open the two back zippers to ease installation and pass radio antennas (if installed) through the cover opening.

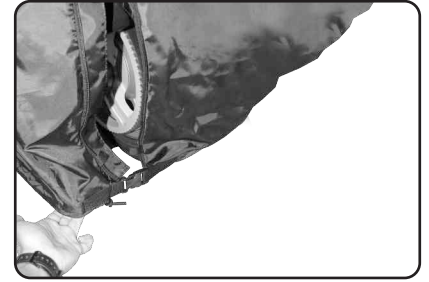

3. Snap rear lower strap buckles on both side for ease to close back zippers.




4. Close both zippers.  
NOTE: Make sure to push the inner waterproof flap towards inside direction to avoid zipper jams while closing the zippers.



5. Close the Velcro attachment on both sides.



6. Fasten the centre strap going under the vehicle. Tighten strap to secure cover.

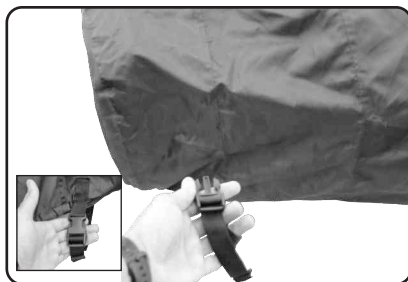

7. Fasten and tighten the two front straps going under the vehicle (Behind each wheel).



8. Your installation is now complete. Check cover installation for perfect fit

### CLEANING METHOD :

1. Hose down the cover thoroughly both inside and out to remove dirt.
2. Any mild soap or bleach less mild detergent may be used.

**NOTICE :** Do not machine wash or allow to dry on the vehicle  
Do not machine dry  
Do not dry clean