

16-Channel Professional NVR




Quick Features:

- 16 Ch. IP camera input
- Built-in 16 Port 802.3af PoE Switch
- 160 Mbps Bit rate Input and 225 Mbps Output Max
- Supports H.265(+), H.264(+)
- Simultaneous HDMI & VGA output
- 16 Ch. 1080p synchronous playback
- JPEG picture capture and playback
- Tag video clips, search and playback by tag
- Digital zoom on live view and playback
- Supports POS Function
- 4 SATA HDD interfaces up to 10TB each

Box Contents:

- NX2-Series Network Video Recorder (NVR)
- Power Cord
- USB Mouse
- Hard Drive Cables and Hardware
- Ethernet Cable
- Rack-Mount Ears

Armix Viewer V2 App

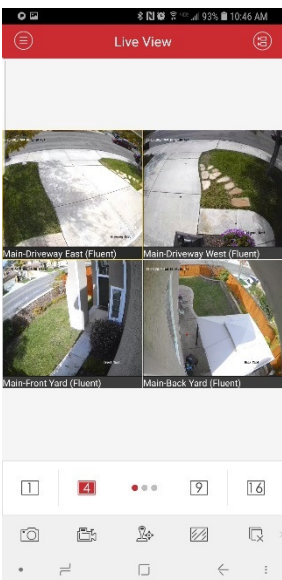

- Allows Live & Remote Playback
- Live Multiple Sites
- Record Video & Snapshots to your Phone
- PTZ Control Capable
- Multi-Stream Types to Improve Remote Viewing

Specifications

Model Series	NX2-16
Video Compression	H.264 / H.264+ / H.265 / H.265+
IP Input Type	IPCAM (Armix), ONVIF
IP Video Input	16 Ch. IP
Video Output	1 HDMI, 1 VGA
HDMI Video Resolution	4K UHD / 30Hz max
HDMI Alternative Resolutions	1920×1080@60Hz, 1600×1200@60Hz, 1280×1024@60Hz, 1280×720@60Hz, 1024×768@60Hz
VGA Video Resolution	1080P / 60Hz max
VGA Alternative Resolutions	1280×1024@60Hz, 1280×720@60Hz, 1024×768@60Hz
Audio Input / Output	1/1
Two-way Audio	1/1
Real-time recording resolution	30fps @ Up to 12 Megapixels
Max Recording Bitrate	160 Mbps Bit Rate Input Max
RAID	N/A
Synchronous Playback	16 Ch. @ 1080p 4 Ch. @ 4K UHD
Alarm Input/ Output	16/4
Network Interface	2 RJ45 10M/100M/1000M adaptive Ethernet Interface
PoE Network Interfaces/Built-in switch	16 independent 100 Mbps PoE network interfaces
Internal SATA	4 SATA interfaces up to 10TB each
eSATA	N/A
USB interface	2 x USB2.0, 1 x USB3.0
Chassis	19-inch rack-mounted 1.5U
Power Supply	100 ~ 240VAC, 20W
Dimensions (W x D x H)	17.5"W × 15.4"D × 2.75"H
Weight	11 lbs (without hard disks)