

**Setting the current time:**

00: - hours  
:00 - minutes

Press the buttons, until the current time is set.

**Set closing time:**

Set / Select the desired closing time.

(1) press to move cursor one step, hold to mark several segments  
(2) press to save the marked segments

**Erase settings:**

Settings will be cleared.  
(except time)

**Settings - Mode:**






**activated:**  
"P" appears in the display

**deactivated:**  
no "P" in the display

(must be displayed to make changes)

# BS-D Setting

Setting a complete closing time, a supplement to the manual (e.g. 8:00 pm - 8:00 am)

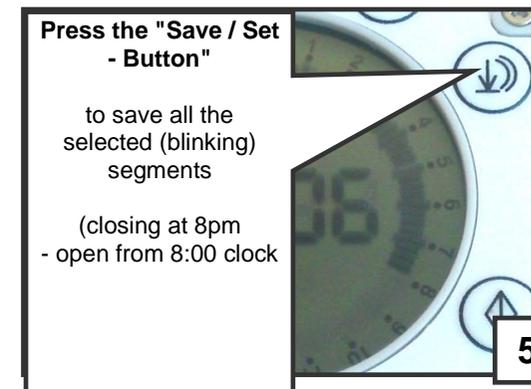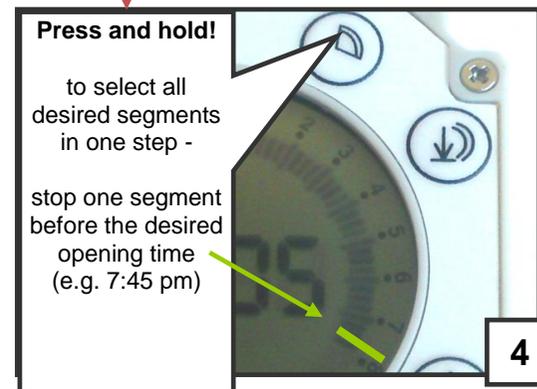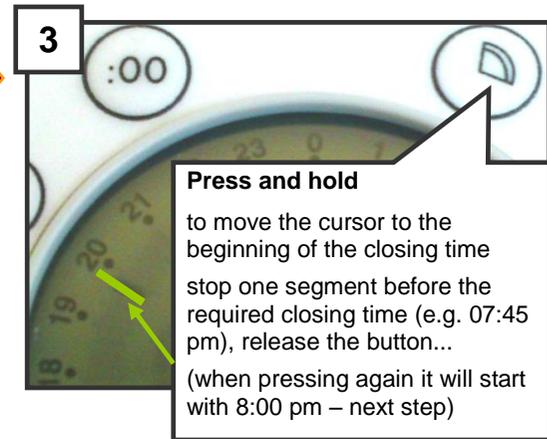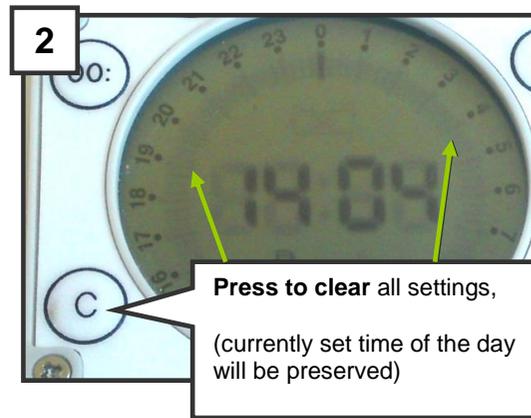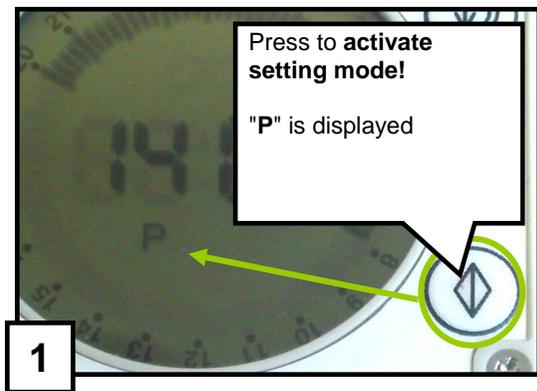

**Setting the Clock:**  
*The setting mode must be active!*

"P" must be displayed

Press (repeatedly):  
**00:** to set the hour  
**:00** to set the minutes

The diagram shows the clock display with '13:57' and 'P' displayed. Callout boxes point to the '00:' and ':00' buttons on the left side of the clock face.

- If keys sometimes did not respond immediately, please try it several times with gentle pressure, each about 1 second, in such a case. Rough handling (using a screwdriver or similar) will void the warranty. Please contact us in advance, or send us the clock for verification/control.

- Each black shaded segment represents a quarter of an hour, to which is closed. In order to remain permanently closed overnight, all segments must be selected from-to continuous. Outside of the marked segments, the twilight sensor is dominant. This means it will be closed when it is dark enough, and opened when it is bright enough.

- The larger segment under a number X represents a closing time of xx:00 - xx:15! If this is highlighted there will be opened 15 minutes after this full hour, when it is bright enough.

The default setting for "closed" is from 10:00 pm to 8:00 am!