




Change the way you think about time

NIGHT VISION

INSTRUCTION MANUAL

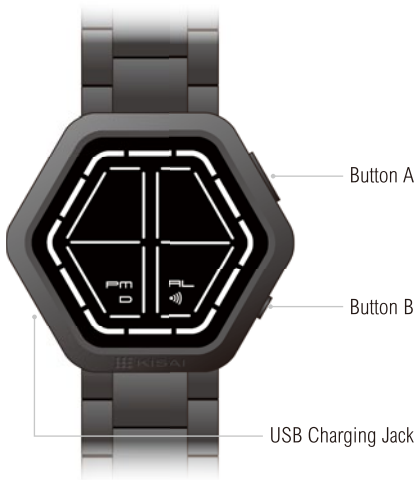

1. How to read the time and date

I. Time

- Press button A to display the time.
- The LEDs will light up and the time will be shown.
- Hours are displayed in the outer ring, minutes are shown by numbers in the centre.
- The time display will turn off after 10 seconds.

Hours



Minutes



Example 3:26



II. Date

- Press button B to display the date.
- The date icon indicates that you are in date mode.
- The LEDs will light up and the date will be shown.
- The month is displayed in the outer ring, the date is shown by numbers in the centre.
- The date display will turn off after 10 seconds.

Month



date icon

Date



Example June 4th



2. How to set the date, time and animation

- Press and hold button A for 3 seconds to enter setting mode.
*Note after 10 seconds of inactivity setting mode will deactivate

I. Setting the year

- The date mode icon will be displayed and the year LEDs will flash when you are in year setting mode.
- Press button B to increase the year as required.
- Press button A to confirm and move to the month.

II. Setting the month

- The date mode icon will be displayed and the month LEDs will flash when you are in month setting mode.
- Press button B to increase the month as required.
- Press button A to confirm and move to the date.

III. Setting the date

- The date mode icon will be displayed and the date LEDs will flash when you are in date setting mode.
- Press button B to increase the date as required.
- Press button A to confirm and move to the hour.

IV. Setting the hour

- The hour LEDs will flash when you are in hour setting mode.
- The PM icon in setting mode indicates that you are setting the time in PM.
- Press button B to increase the hour as required.
- Press button A to confirm and move to the minutes.

V. Setting the minutes

- The minute LEDs will flash when you are in minute setting mode.
- Press button B to increase the minutes as required.
- Press button A to confirm and move to the animation.

VI. Setting the animation

This watch has a light-up animation feature. When set, the LEDs will animate once every 15 minutes between 6pm and midnight.

- In setting mode, when the animation feature is on, the LEDs will animate.
- In setting mode, when the animation feature is off, all LEDs will flash.
- Press button B to turn the animation on or off.
- Press button A to confirm and exit setting mode.

*Note after 10 seconds of inactivity setting mode will deactivate

Setting Mode Examples

April 23rd



date icon

9:45PM



PM icon

3. Checking and setting the alarm

I. Checking the alarm


- Press button B twice to display the alarm time.
- The alarm mode icon indicates that you are in alarm mode. The alarm on icon indicates that the alarm is on.

II. Setting the alarm

- Press and hold button B for 3 seconds to enter alarm setting mode.

*Note after 10 seconds of inactivity setting mode will deactivate

- The alarm mode icon will be displayed.
- Press button A to turn the alarm on or off. The alarm on icon indicates that the alarm is on.
- Press button B to confirm and move to the hour.
- Press button A to increase the hour as required.
- The PM icon in alarm setting mode indicates that you are setting the alarm time in PM.
- Press button B to confirm and move to the minutes.
- Press button A to increase the minutes as required.
- Press button B to confirm and exit alarm setting mode.



4. How to recharge the battery


- This watch has a USB rechargeable battery.
- When the lights become dim or do not light up, you should recharge the battery.
- To recharge the battery, unscrew the USB cap using the screw driver provided and connect the USB charging cable to the USB charging jack.
- Connect the charging cable to a power source, e.g. your computer.
- When charging, the LED charging indicator will blink.
- When the charging indicator stops blinking, the battery is 90% charged.

It is advised that you continue to charge the battery for a full 3.5 hours to ensure the battery is 100% charged.



- It is advised that you use the screw driver provided when opening the USB cap so as not to damage the head of the screw.
- Items included in the box:

- Watch
- USB cable
- Spare USB cap
- Screwdriver
- Instruction Manual



5. User information

I. Battery

- This watch uses an LIR 2032 rechargeable battery only.
- The LIR 2032 rechargeable battery is replaceable.
- Battery lifetime will vary depending on use, but is estimated at approximately 300 charges.
- To maximize battery life, turn the animation off.
- The plug standard input voltage for the LIR 2032 battery is DC5V. You should use only the cable provided with the watch when recharging.

II. Warranty

- This watch is covered by a 1 year warranty.
This warranty does not cover water damage, accidental damage, neglect or unauthorized repair.

III. Caution

- This watch is water resistant to 3ATM. Please do not use the watch in the shower, for swimming or for other water related activities.
- Please only use the cable provided with the watch for recharging as it is designed especially for this watch.

SPECIFICATIONS

Case Materials	Stainless Steel
Strap Materials	Stainless Steel
Case Dimensions	38 x 42 x 11 mm
Finish	Polished
Maximum Fit Wrist Size	210mm (approx.)
Weight	120g
Display	Digital Tubes
Battery	3.6V LIR 2032 Rechargeable
Water Resistancy	3 ATM

NIGHT VISION

取り扱い説明書



1. 時刻と日付の読み方

I. 時刻

- ・ Aボタンを押すと時刻が表示されます。
- ・ 全てのLEDが点灯し時刻を表示します。
- ・ 外周のLEDで時間、内側のデジタル数字で分を表示します。
- ・ 時刻表示は10秒後自動的に終了します。

時

分

例 3:26



II. 日付

- ・ Bボタンを押すと日付が表示されます。
- ・ 日付表示の画面ではDATEアイコンが表示されます。
- ・ 全てのLEDが点灯し日付を表示します。
- ・ 外周のLEDで月、内側のデジタル数字で日を表示します。
- ・ 時刻表示は10秒後自動的に終了します。

月

日

例 6月4日



DATE アイコン

2. 日付・時刻・アニメーションの設定

- ・ Aボタンを3秒間押し続けると設定モードになります。
※10秒間何も操作をおこなわないと、設定モードは自動的に終了します。

I. 「時」の設定

- ・ 「年」の設定時は、DATEアイコンが点灯し、年表示のLEDが点滅します。
- ・ Bボタンで1年ずつ増やすことができます。
- ・ Aボタンを押すと確定して次の「月」の設定に移動します。

II. 「月」の設定

- ・ 「月」の設定時は、DATEアイコンが点灯し、月表示のLEDが点滅します。
- ・ Bボタンでひと月ずつ増やすことができます。
- ・ Aボタンを押すと確定して次の「日」の設定に移動します。

III. 「日」の設定

- ・ 「日」の設定時は、DATEアイコンが点灯し、日表示のLEDが点滅します。
- ・ Bボタンで1日ずつ増やすことができます。
- ・ Aボタンを押すと確定して次の「時」の設定に移動します。

IV. 「時」の設定

- ・ 「時」の設定時は、時表示のLEDが点滅します。
- ・ PM時間帯の設定時にはPMアイコンが表示されます。
- ・ Bボタンで1時間ずつ増やすことができます。
- ・ Aボタンを押すと確定して次の「分」の設定に移動します。

V. 「分」の設定

- ・ 「分」の設定時は、分表示のLEDが点滅します。
- ・ Bボタンで1分ずつ増やすことができます。
- ・ Aボタンを押すと確定して次の「アニメーション」の設定に移動します。

VI. 「アニメーション」の設定

※本品にはLEDによる光のアニメーション表示があります。

アニメーションを設定すると、6pmから12amの間、15分ごとに1回アニメーションが表示されます。

- ・ 設定モードでは、アニメーションがONの場合はアニメーションが表示されます。
- ・ アニメーションがOFFの場合は全てのLEDが点滅します。
- ・ BボタンでアニメーションのONとOFFの切り替えができます。
- ・ Aボタンを押すと確定してLEDが消灯し、設定モードは終了します。

※10秒間何も操作をおこなわないと、設定モードは自動的に終了します。

設定モード例

4月23日



DATE アイコン

9:45 PM



PM アイコン


3. アラーム時刻の確認と設定

I. アラーム時刻の確認

- ・ Bボタンを2回押すとアラーム時刻を表示します。
- ・ アラーム時刻表示の際はアラームモードアイコンが点灯します。また、アラームがONの場合はアラームONアイコンが点灯します。

II. アラーム時刻の設定

- ・ Bボタンを3秒間押し続けると設定モードになります。
※10秒間何も操作をおこなわないと、設定モードは自動的に終了します。
- ・ アラームモードアイコンが点灯します。
- ・ AボタンでONとOFFの切り替えができます。
ONの場合はアラームONアイコンが点灯します。
- ・ Bボタンを押すと確定して次の「時」の設定に移動します。
- ・ Aボタンで1時間ずつ増やすことができます。
- ・ PM時間帯の設定時にはPMアイコンが点灯します。
- ・ Bボタンを押すと確定して次の「分」の設定に移動します。
- ・ Aボタンで1分ずつ増やすことができます。
- ・ Bボタンを押すと確定して設定モードは終了します。



4. バッテリーの充電方法

- ・ 本品はUSB充電バッテリーを内蔵しています。
- ・ LEDの輝度が弱くなったり、点灯しなくなった場合は、バッテリーを充電してください。
- ・ 充電する場合は、付属のドライバーでUSBキャップをはずし、USBケーブルをUSBジャックに接続してください。
- ・ USBケーブルの片方の端子をパソコンなどの電源供給が可能なUSBジャックに接続してください。
- ・ 充電中は充電インジケータLEDが点滅します。
- ・ バッテリーが90%まで充電されると、充電インジケータLEDが点灯に変わります。
100%のフル充電をされる場合は、約3.5時間の連続充電をおこなってください。




充電インジケータ

- ・ USBキャップをはずす場合、ねじを損傷しないように付属のドライバーを使用してください。

・ 付属品

- ・ 本体
- ・ USB ケーブル
- ・ スペア用USB キャップ
- ・ ドライバー
- ・ 取り扱い説明書



5. インフォメーション

I. バッテリー

- ・本品にはLIR 2032充電バッテリーが内蔵されています。
- ・LIR 2032充電バッテリーは交換可能です。
- ・バッテリーの寿命は使用状況によって異なりますが、およそ300回の充電が可能です。
- ・アニメーションの設定をOFFにすると、バッテリーの寿命を長くすることができます。
- ・LIR 2032充電バッテリーの入力電圧はDC5Vです。充電の際は必ず付属の専用USBケーブルをご使用ください。他のUSBケーブルを使用するとモジュールを破損させる可能性がございます。

II. 保証

- ・生産時に生じた不良にのみ1年間の無償修理を保証します。不注意による故障、破損、水没等は保証期間内であっても有償修理となりますので、ご了承ください。

II. ご注意

- ・この商品は3気圧防水(日常生活防水)です。シャワーやスイミングまたは、水を扱う際の使用はお避けください。
- ・充電の際は必ず付属の専用USBケーブルをご使用ください。付属のUSBケーブルは、この商品専用に設計された特別なケーブルです。

商品仕様

ケース素材	ステンレス スチール
ストラップ素材	ステンレス スチール
ケースサイズ	38 / 42 / 11 mm
仕上げ	光沢
最大装着リストサイズ	約210mm
重量	120g
ディスプレイ	デジタルチューブ
バッテリー	3.6V LIR 2032 充電バッテリー
防水性能	3気圧(日常生活防水)

