

INSTALLATION GUIDE

150W LED CANOPY LIGHT

PLED-CNP150W57K-W

IMPORTANT: When using electrical equipment, basic safety precautions should always be followed as below:

READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

1. To reduce risk of electric shock, turn off power before installation or servicing.
2. This luminaire must be installed in accordance with the NEC and local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
3. Verify the availability of necessary tools and incidental materials.

UNPACKING: Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the delivery carrier.

PACKAGE CONTENTS: 1 x 150W Canopy Light, 1 x Safety Rope


COMPATIBLE DIMMERS: Only compatible with 0-10V LED dimmers.

LEVITON: DD710-BNDZ, DS710-10E

LUTRON: DVTV-WH, DVSTV-453P

STEPS FOR INSTALLATION

1. **SCREW MOUNTING:** Put the fixture on the mounting surface and mark the locations of the four screw holes. Remove the fixture and drill holes at the four mounting holes.
2. Using wire nuts (not included), connect the fixture wires to the supply wires. If using a dimmer, connect the purple (dim+) and pink (dim-) wire to each of the 0-10V dimmer wires separately. If a dimmer is not being used, both dimmer wires must NOT be left exposed. Use wire nuts to cover each dimmer wire independently.
3. Optional: If you choose to use the 30cm safety rope, screw one end of the safety rope to the fixture and screw the other to the mounting surface using appropriate mounting hardware (not included).
4. Fixture is best mounted by drilling through the designated holes to secure fixture to mounting surface using appropriate mounting hardware (not included). All unused holes must be plugged. Waterproof silicone will ensure a tight seal.
5. **3/4" CONDUIT MOUNTING:** Follow Step 2 to wire the fixture, and Step 3 if desired. Then rotate the fixture to screw the threaded pipe end into the center mounting point on the fixture.

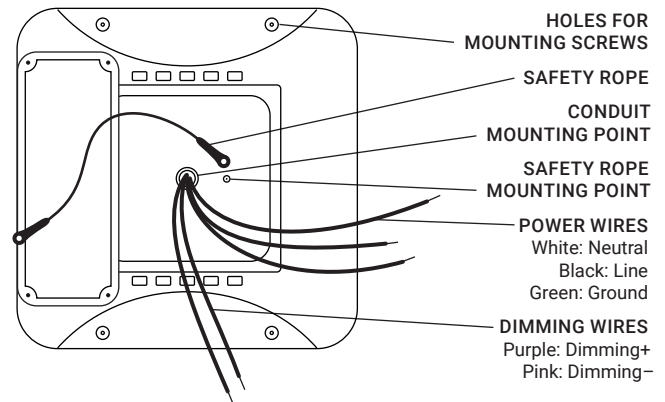

WARNING

RISK OF FIRE OR ELECTRIC SHOCK.

DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING THE LIGHT.

DO NOT USE ANY OTHER DRIVER EXCEPT PARMIDA LIGHTING DRIVER THAT IS INCLUDED WITH THE FIXTURE.