


# 4' LED T8 TUBE LIGHT CLEAR LENS



## TYPE B, DIRECT INSTALLATION

The Parmida LED Technologies™ 4FT LED Direct Wire Type B T8 tube can be installed by a simple bypass of the ballast. This tube can be installed with a single-ended or dual-ended connection and it can install directly into your fixture's original shunted sockets (tombstones), eliminating the need to retrofit your fixture with non-shunted sockets. Fast and simple installation under the functionality of your choice, this tube is designed with user experience as the defining motivator.

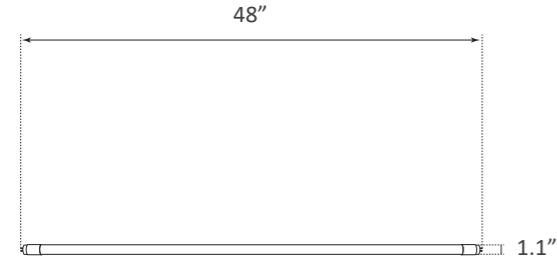

Weight 200g  
Dimensions 48" x 1.1" x 1.1"



- 50,000 HOURS
- SHATTERPROOF  
UL RECOGNIZED
- 110-277V AC  
VOLTAGE
- 2200 LUMENS
- 220 WATT  
REPLACEMENT
- 260°  
BEAM  
ANGLE
- INSTANT  
ON
- NO HUMMING/  
BUZZING

## PRODUCT SPECIFICATIONS

Item Number	PLED-T8DS18W3K-C	PLED-T8DS18W4K-C	PLED-T8DS18W5K-C
Wattage	18W	18W	18W
Lumens	2200lm	2200lm	2200lm
Voltage	110-277V AC	110-277V AC	110-277V AC
Equivalent	220W	220W	220W
Beam Angle	260°	260°	260°
Dimmable	No	No	No
Material	Glass	Glass	Glass
CCT	3000K, Soft White	4000K, Cool Light	5000K, Day Light
CRI	>80	>80	>80
LED Driver Type	Integrated Driver	Integrated Driver	Integrated Driver
Base type	G13	G13	G13
Life	50,000 Hours	50,000 Hours	50,000 Hours
Efficiency	55%	55%	55%
Certification	DLC, UL	DLC, UL	DLC, UL
Lens Type	Clear	Clear	Clear
Warranty	5 Years	5 Years	5 Years