


# 8' LED T8 TUBE LIGHT SINGLE PIN

## CLEAR / FROSTED LENS DIRECT INSTALLATION

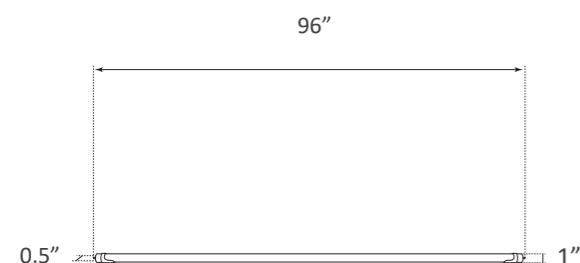

The Parmida LED Technologies™ 8FT 36W LED T8 Bypass Installation is a high-output energy efficient take on a traditional fluorescent 8ft tubes. These LED 8ft T8's are designed with a shatterproof lens which allows for safe installation in fixtures, with or without wire guards. This LED 8ft T8 requires a bypass installation with a dual ended connection and is compatible with FA8 Single Pin Base Fixtures.

Weight 540g  
Dimensions 96" x 1" x 0.5"



### PRODUCT SPECIFICATIONS

Item Number	PLED-T8-8-48W5000K-CL	PLED-T8-8-48W5000K-FR
Wattage	48W	48W
Lumens	6000lm	6000lm
Voltage	110-277V AC	110-277V AC
Equivalent	600W	600W
Beam Angle	180°	180°
Dimmable	No	No
Material	Aluminium & Optical Polycarbonate	Aluminium & Optical Polycarbonate
CCT	5000K, Day Light	5000K, Day Light
CRI	>80	>80
LED Driver Type	Integrated Driver	Integrated Driver
Base type	FA8	FA8
Life	50,000 Hours	50,000 Hours
Efficiency	52%	52%
Certification	UL	UL
Lens Type	Clear	Frosted
Warranty	5 Years	5 Years



50,000 HOURS



SHATTERPROOF  
UL RECOGNIZED



110-277V AC  
VOLTAGE



6000 LUMENS



600 WATT  
REPLACEMENT



180°  
BEAM  
ANGLE



INSTANT  
ON




NO HUMMING/  
BUZZING



# 8' LED T8 TUBE LIGHT SINGLE PIN

## CLEAR / FROSTED LENS DIRECT INSTALLATION

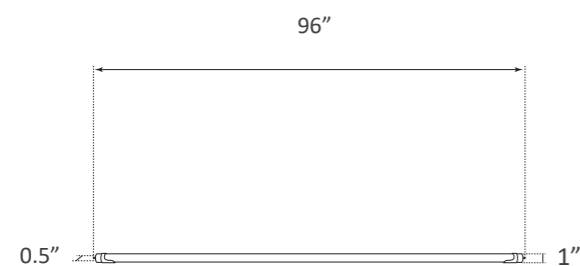

The Parmida LED Technologies™ 8FT 36W LED T8 Bypass Installation is a high-output energy efficient take on a traditional fluorescent 8ft tubes. These LED 8ft T8's are designed with a shatterproof lens which allows for safe installation in fixtures, with or without wire guards. This LED 8ft T8 requires a bypass installation with a dual ended connection and is compatible with FA8 Single Pin Base Fixtures.

Weight 540g  
Dimensions 96" x 1" x 0.5"



### PRODUCT SPECIFICATIONS

Item Number	PLED-T8-8-48W6000K-CL	PLED-T8-8-48W6000K-FR
Wattage	48W	48W
Lumens	6000lm	6000lm
Voltage	110-277V AC	110-277V AC
Equivalent	600W	600W
Beam Angle	180°	180°
Dimmable	No	No
Material	Aluminium & Optical Polycarbonate	Aluminium & Optical Polycarbonate
CCT	6000K, Bright White	6000K, Bright White
CRI	>80	>80
LED Driver Type	Integrated Driver	Integrated Driver
Base type	FA8	FA8
Life	50,000 Hours	50,000 Hours
Efficiency	52%	52%
Certification	UL	UL
Lens Type	Clear	Frosted
Warranty	5 Years	5 Years



50,000 HOURS



SHATTERPROOF  
UL RECOGNIZED



110-277V AC  
VOLTAGE



6000 LUMENS



600 WATT  
REPLACEMENT



180°  
BEAM  
ANGLE



INSTANT  
ON



NO HUMMING/  
BUZZING