


4' LED T8 TUBE LIGHT FROSTED LENS




TYPE A+B, HYBRID INSTALLATION

The Parmida LED Technologies™ 4 FT Type A+B LED T8 tube can function with or without a ballast. This tube can be installed with a single-ended or dual-ended connection. Fast and simple installation under the functionality of your choice, this tube is designed with user experience as the defining motivator. This tube is constructed with a shatterproof film sleeve to protect its glass housing, making it suitable for use in applications that require shatterproof lighting.

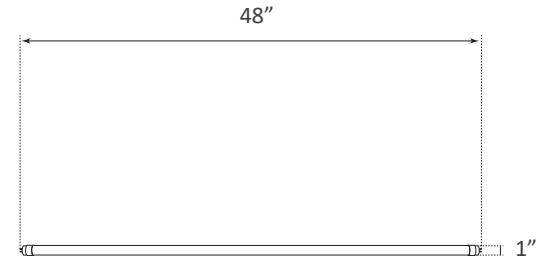

Weight 357g
Dimensions 48" x 1" x 1"

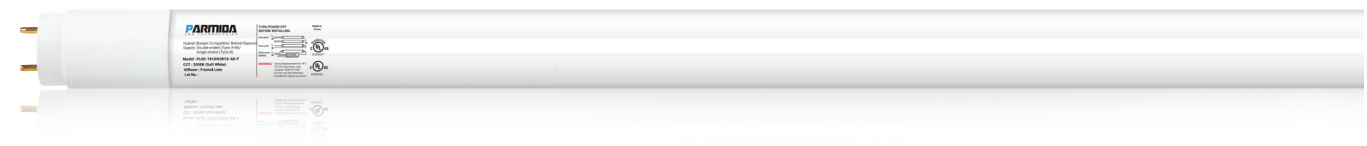

PRODUCT SPECIFICATIONS

Item Number	PLED-T818W3KV2-AB-F	PLED-T818W4KV2-AB-F	PLED-T818W5KV2-AB-F
Wattage	18W	18W	18W
Lumens	2200lm	2200lm	2300lm
Voltage	120-277V AC	120-277V AC	120-277V AC
Equivalent	40W	40W	40W
Beam Angle	240°	240°	240°
Dimmable	No	No	No
Material	Glass with Shatterproof film	Glass with Shatterproof film	Glass with Shatterproof film
CCT	3000K, Soft White	4000K, Cool Light	5000K, Day Light
CRI	>80	>80	>80
LED Driver Type	Integrated Driver	Integrated Driver	Integrated Driver
Base type	G13	G13	G13
Life	45,000 Hours	45,000 Hours	45,000 Hours
Efficiency	55%	55%	55%
Certification	DLC, UL	DLC, UL	DLC, UL
Lens Type	Frosted	Frosted	Frosted
Warranty	5 Years	5 Years	5 Years

- 45,000 HOURS
- SHATTERPROOF
UL RECOGNIZED
- 120-277V AC
VOLTAGE
- 2300 LUMENS
- 40 WATT
REPLACEMENT
- 240°
BEAM
ANGLE
- INSTANT
ON
- NO HUMMING/
BUZZING