





### AOS 3/4 HP Open Drip or TENV Motor - 115V/230V Wiring Diagram

Wiring AOS 3/4HP Open Drip or TENV Motor - 115V/230V

Bremas - Reversing Switch - 115 Volt.

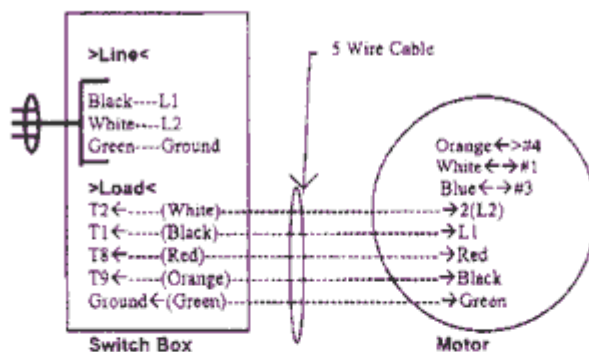

Bremas - Reversing Switch - 230 Volt.

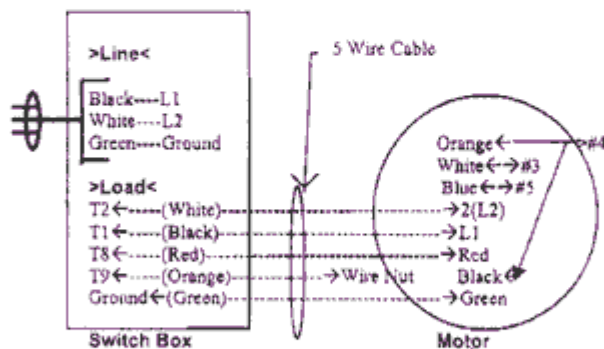

Up - Clockwise Down - Counter Clockwise.

**NOTE:** To switch from 115V to 230V move White motor wire from #1 to #3 and Blue motor wire from #3 to #5. Wire nut the motor Black to the motor Orange & Put wire nut Orange from switch. For 230V use, GECLMUST be 230V Type.

**REMOTES:** To install a remote remove hand switch, hook the 5 wire cable from motor as follows:  
 Remote Orange to the 5 wire White  
 Remote Black to the 5 wire Black  
 Remote White to the 5 wire Red  
 Remote Red to the 5 wire Orange for 115V - Unused for 230V

Approved by  EK  Date  10/9/96  Revised  11-07-00