



**USERS MANUAL
FOR MODEL: IQ3-LM**

THANK YOU FOR PURCHASING THE
TAILWIND AUTOMATIC GARAGE DOOR CONTROLLER.
WE'RE SURE YOU'RE GOING TO LOVE IT HOWEVER IF YOU ARE

UNSATISFIED? EMAIL US FIRST.

SUPPORT@GOTAILWIND.COM

WE'LL RESOLVE THE ISSUE WITH YOU QUICKLY AND
PROFESSIONALLY TO GET YOU BACK ON THE ROAD.

MORE SUPPORT CAN BE FOUND AT

WWW.GOTAILWIND.COM/INSTALLATION

NOTICE

READ INSTRUCTIONS THOROUGHLY BEFORE BEGINNING


1. If using this product with residential door openers, this product must be used only with door openers manufactured after 1993 utilize photoelectric sensors. The photoelectric sensors are always located on or near the bottom of the door track.

2. To reduce the risk of SEVERE INJURY to persons: DO NOT enable your iQ3 Universal Garage Door Controller if operating either one-piece garage door or swinging doors. The Tailwind iQ3 is only to be enabled on a sectional type garage door.

NOTICE: To comply with FCC and/or Industry Canada (IC) rules, adjustment or modifications of this transceiver are prohibited. THERE ARE NO USER SERVICEABLE PARTS. This device complies with Part 15 of the FCC rules and IC RSS-210. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This device must be installed in a way where a minimum 8" (20 cm) distance is maintained between users/bystanders and device.

WHAT'S INCLUDED?

- TAILWIND VEHICLE SENSOR
- USER MANUAL
- 1 YEAR WARRANTY
- LIFETIME SUPPORT

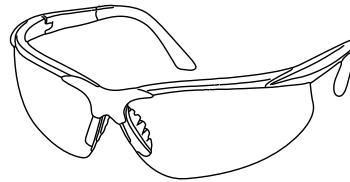

ALWAYS WEAR SAFETY GLASSES
DURING INSTALLATION

CONNECTING THE SECURITY+ 2.0 ADAPTOR

1) DETERMINE WHERE YOU WILL MOUNT THE ADAPTOR. IT SHOULD BE CLOSE TO YOUR GARAGE DOOR OPENER. WE SUGGEST YOU MOUNT IT ON THE CEILING JUST ABOVE THE DOOR OPENER. IT MUST BE WITHIN THE DISTANCE OF THE INCLUDED WHITE WIRE AS THIS WHITE WIRE CONNECTS TO YOUR GARAGE DOOR OPENER.

2) USE THE INCLUDED ELECTRICAL CONNECTORS TO CONNECT THE 2 TAILWIND CONTROL WIRES TO THE 2 SHORT BLACK WIRES ON THE ADAPTOR. THERE IS NO POLARITY TO THESE, SO IT DOES NOT MATTER WHICH TAILWIND CONTROL WIRE YOU CONNECT TO WHICH SHORT BLACK WIRE ON THE ADAPTOR.

3) MAKE SURE THERE IS NOTHING OBSTRUCTING YOUR GARAGE DOOR FROM OPENING OR CLOSING, INCLUDING YOU OR ANY OTHER PERSON OR PROPERTY. THE FOLLOWING INSTRUCTIONS WILL CAUSE YOUR DOOR TO MOVE!

4) CONNECT THE LONG WHITE / RED WIRE PAIR TO THE CONTROL INPUTS ON YOUR GARAGE DOOR OPENER. FOR CHAMBERLAIN DOOR OPENERS, THESE ARE TYPICALLY A RED TERMINAL AND WHITE TERMINAL BESIDE EACH OTHER. CONNECT THE RED WIRE TO THE RED TERMINAL AND THE WHITE WIRE TO THE WHITE TERMINAL. THE BUTTON SHOULD FLASH IF YOU HAVE MADE THE CONNECTIONS PROPERLY. ONCE THESE CONNECTIONS ARE MADE, BE CAREFUL!!! IF YOU ACCIDENTALLY PRESS THE BUTTON, YOUR GARAGE DOOR MAY OPEN OR CLOSE!

3) MOUNT THE ADAPTOR ANYWHERE CONVENIENT. MOUNTING SCREWS HAVE BEEN INCLUDED FOR YOUR CONVENIENCE.

4) RE-CONFIRM THERE ARE NO OBSTRUCTIONS IN THE WAY OF YOUR GARAGE DOOR. PRESS THE BUTTON ON THE ADAPTOR A FEW TIMES UNTIL IT OPENS OR CLOSES YOUR GARAGE DOOR.

YOUR INSTALLATION IS NOW COMPLETE. YOU CAN NOW OPEN CLOSE YOUR GARAGE DOOR USING YOUR TAILWIND SYSTEM.

