

CANOPY

UNIVERSAL PLATE & MULTI-PORT CANOPY INSTALLATION




WARNING

Turn off power at circuit before wiring & always consult a licensed electrician





FOR FLUSH MOUNT SCONCES ONLY:

Attach junction ground wire (G) to the ground screw in the mounting plate

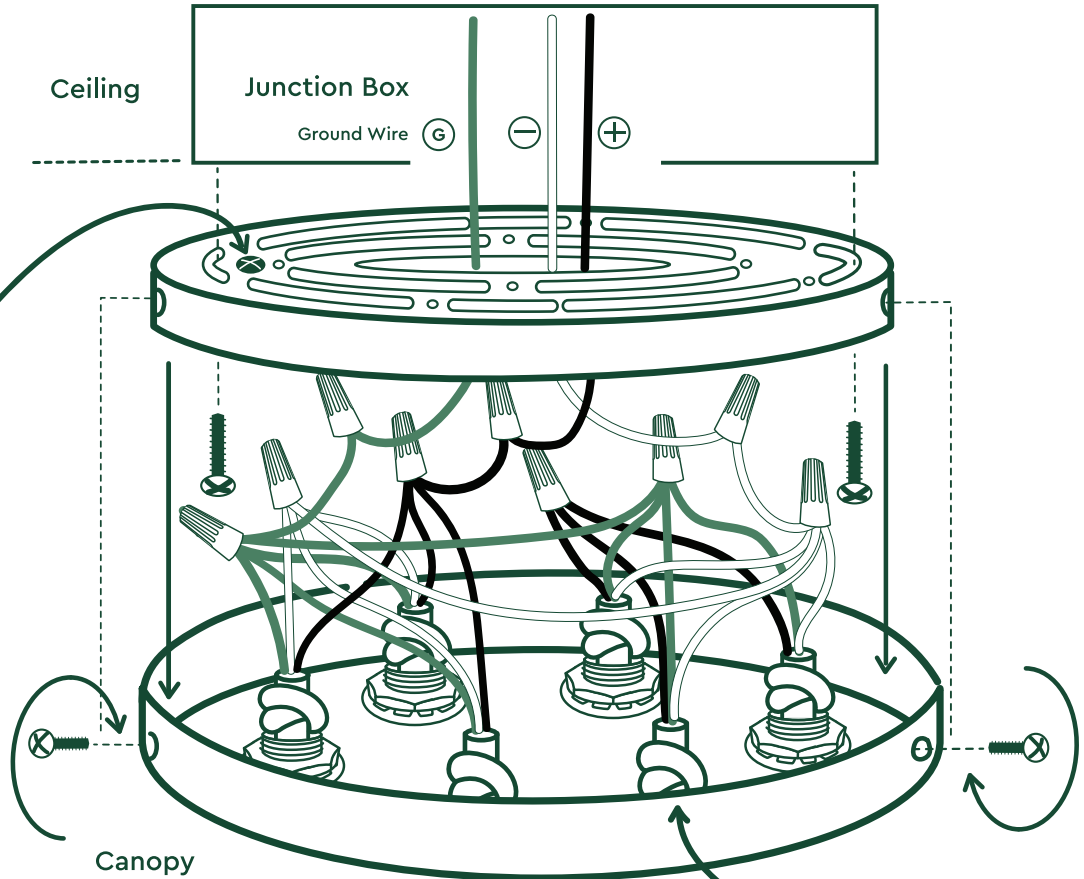


MULTI-PORT PENDANT WIRING

If wiring a fixture with more than 5-Ports, use a "Jumper Lead" to connect wires of the same color.

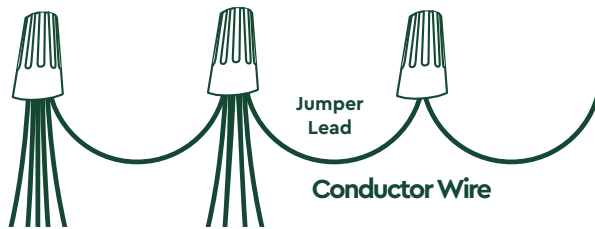

Tie overhead knots on each pendant inside canopy, and tighten the plastic set screw on the canopy grip.



Rotating Canopy Mount

Inserting mount screws into longer openings allows the fixture to rotate into place once secured to a junction box.




Max 6 Wires Per Connector. Use electrical tape around each connection to secure stripped wires into place.



Additional conductor wires and connectors are needed when wiring fixtures with 6 ports or more.


5+ Port Canopies

Multi-Port Wiring Diagram

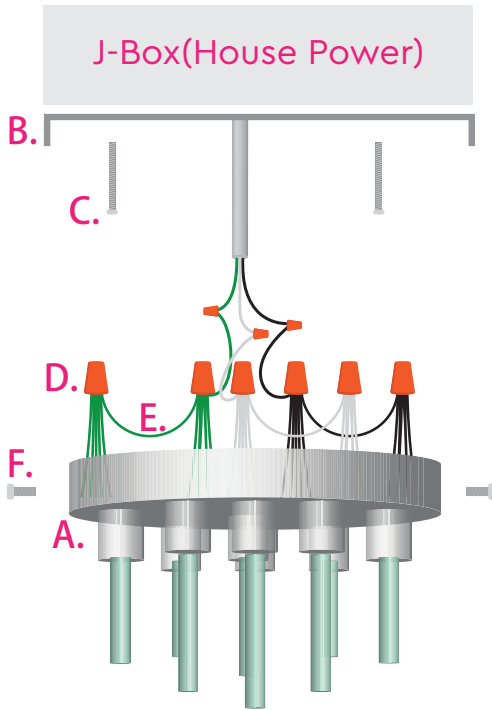

SHOWN: 9-Ports

WIRING BREAKDOWN:

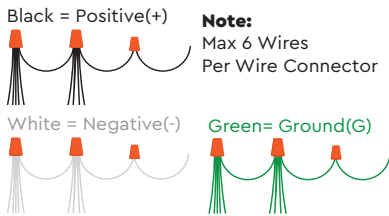

WARNING

- Consult with a certified Electrician before installing.**
- Disconnect or turn off power before installing.**
- Verify that supply voltage is correct.**
- Use proper electrical connectors make connections.**
- DO NOT exceed Maximum Wattage.**

WHAT'S INCLUDED:

- Ceiling Canopy (A)
- Mounting Bracket (B)
- Mounting Bracket Screws (C)
- Wire Connectors (D)
- Wire Jumper Leads (E)
- Canopy Mounting Screws (F)

STEP 1:

Before starting any electrical project consult an electrician. Turn off all power to the desired J-Box. This is usually done at the breaker box.

STEP 2:

If wiring a fixture with more than 5-Ports, using a "Jumper Lead" to connect more than six wires is needed. Grouping the first five wires together by twisting them into a single point, add the Jumper Lead as the sixth wire to connect to the next group of wires. Securing it with the supplied Wire Connectors, repeat this step until you have grouped all of the same color wires together. See the Wiring Breakdown Diagram for example: The shown diagram is for a 9-Port Fixture, your first group of wires will be five plus the Jumper Lead equaling a total of six. Your next group of wires will be four plus two Jumper Wires equaling six. This connects all 9 of the ports together with a single lead end to connect to the power supply coming from the J-Box. Note: (Use electrical tape around each connection to insure the Wire Connectors are secured into place).

STEP 3:

Repeat step two if you have a fixture that is more than 9-Ports.

STEP 4:

Once all of the groups of wires are connected, take the final Jumper Lead for each color wire and connect them to the corresponding supplied wire coming from your J-Box. As shown in the Wiring Diagram to the left.

STEP 5:

From here, situate the wires into the J-Box so that you can fit the Ceiling Canopy into place over the Mounting Bracket. Once in place, insert the Canopy Mounting Screws into the side of the canopy securing the canopy into place.

STEP 6:

Install light bulbs, we recommend L.E.D (Not Included) and restore power to the J-Box and test fixture.

MAX WATTAGE PER SOCKET: 8W