



Rear Wheelhouse Liner Replacement

Removal Procedure

1. [Tire and Wheel Removal and Installation](#) »Remove

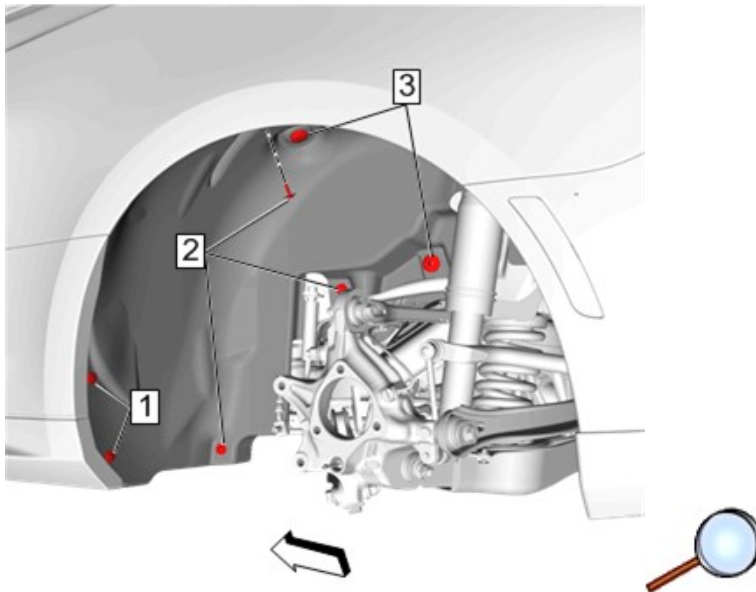


2. Rear Wheelhouse Liner Retainer(1)»Remove[2x]
3. Rear Wheelhouse Liner Screw(2)»Remove[3x]
4. Rear Wheelhouse Liner Retainer(3)Remove[2x]

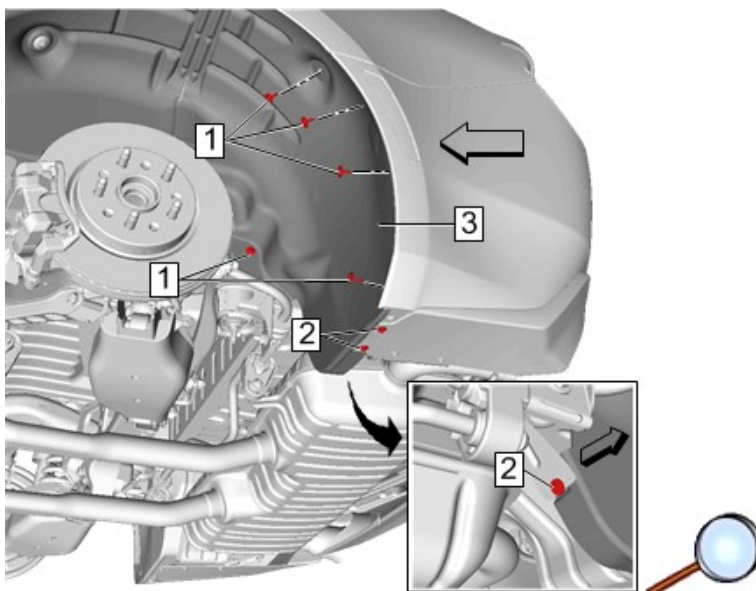

5. Rear Wheelhouse Liner Screw(1)»Remove[5x]
6. Rear Bumper Fascia Bolt(2)»Remove[3x]
7. Rear Wheelhouse Liner(3)»Remove

Installation Procedure

© 2019 General Motors. All rights reserved.

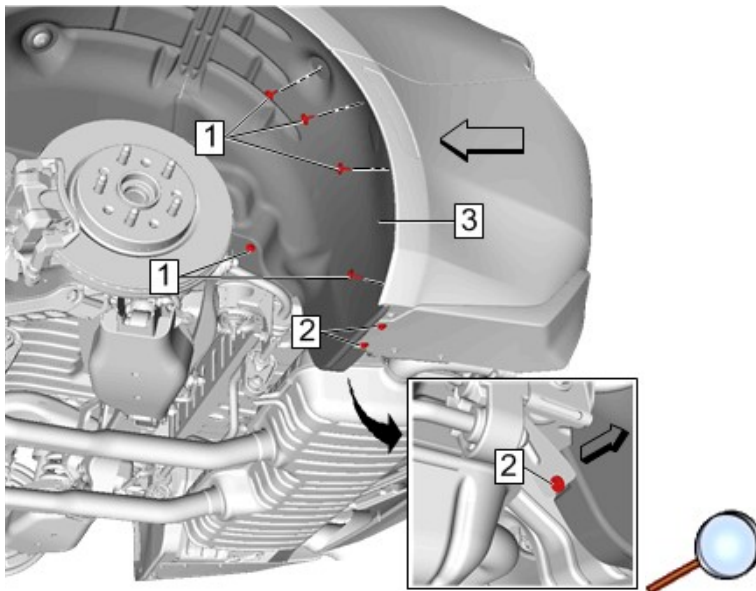


1. Rear Wheelhouse Liner(3)»Install

Caution: Refer to [Fastener Caution](#)

2. Rear Bumper Fascia Bolt(2)»Install and tighten [3x]**5 N•m (44 lb in)**

3. Rear Wheelhouse Liner Screw(1)»Install and tighten [5x]**2.5 N•m (22 lb in)**

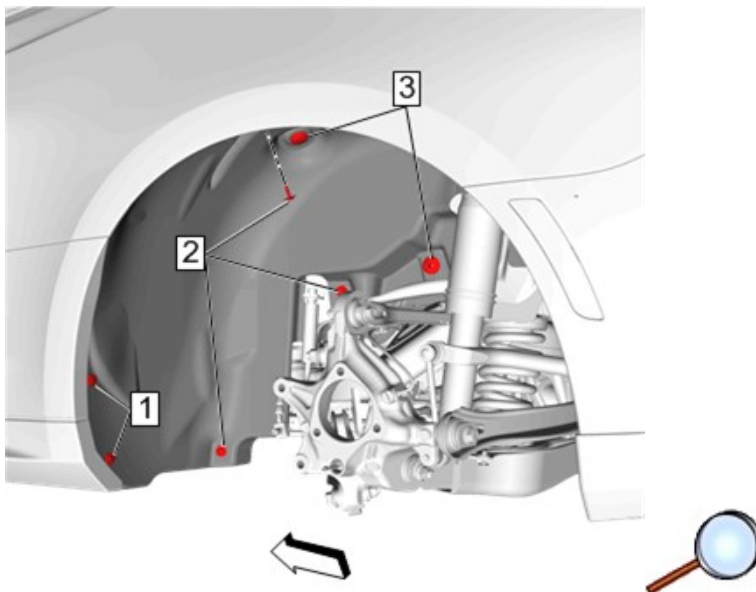

4. Rear Wheelhouse Liner Retainer(1)»Install[2x]

5. Rear Wheelhouse Liner Screw(2)»Install and tighten [3x]**2.5 N•m (22 lb in)**

6. Rear Wheelhouse Liner Retainer(3)»Install[2x]

7. [Tire and Wheel Removal and Installation](#) »Install