



Gen6 Reverse Lamp Load Harness

1- Remove 1 of the taillights, you can remove either one as the harness only needs to be installed onto one side. Refer to taillight removal instructions.

2- Plug the Gen5DIY harness inline with the taillight harness and the body harness The new design harness comes with heat wrap on the resistor you can simply let the resistor lay in the lower panel. It will still get hot, so please do not touch.

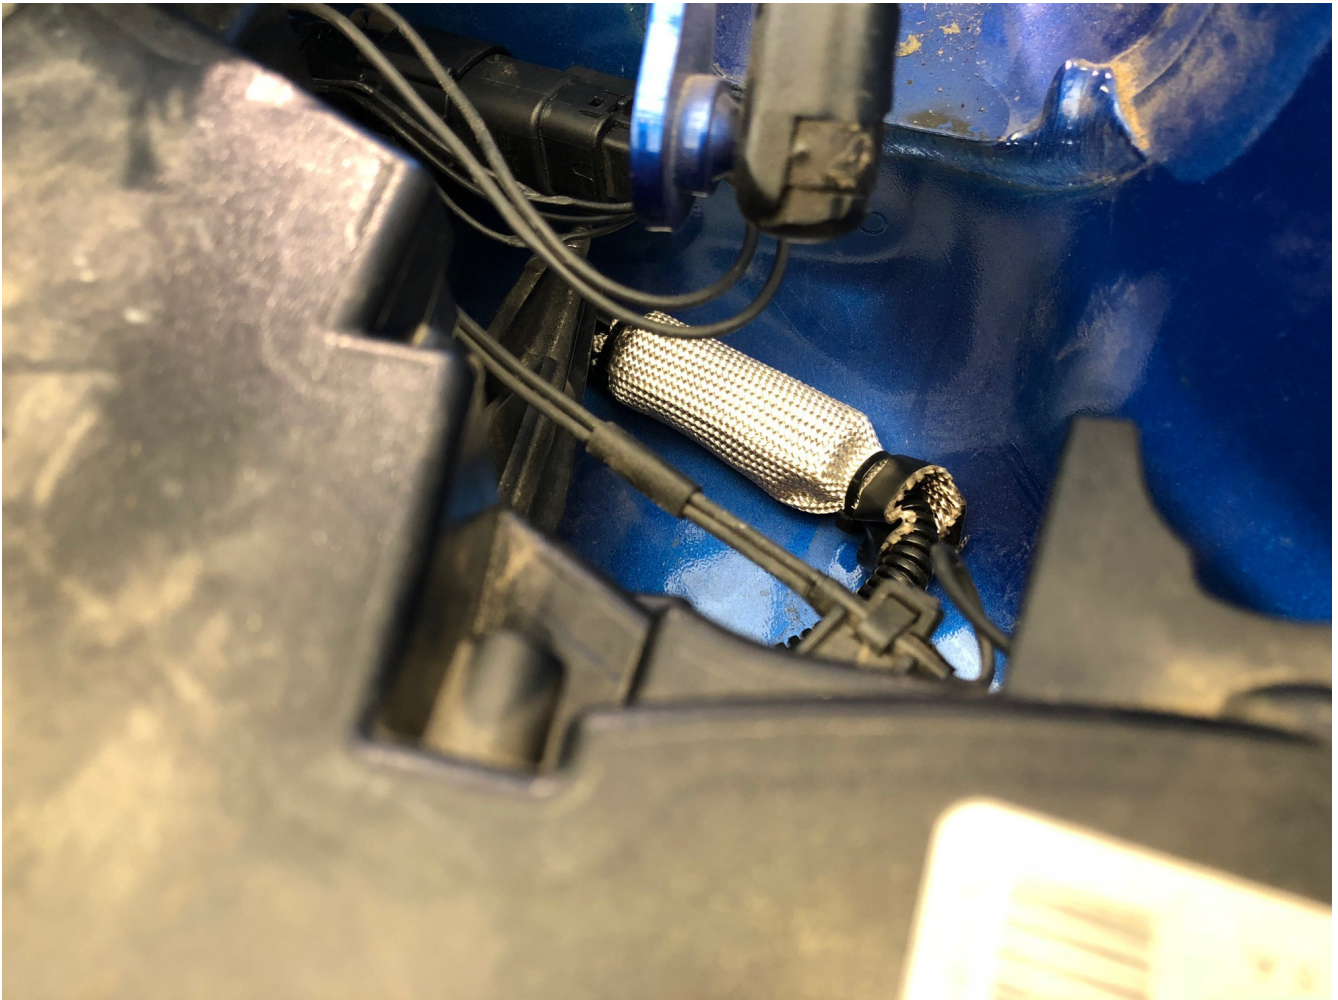

3-Install LED bulbs into taillight assemblies. Install the bulb into the removed taillight while it is out of the car, for the non removed side you can easily access the bulb without removing the taillight.

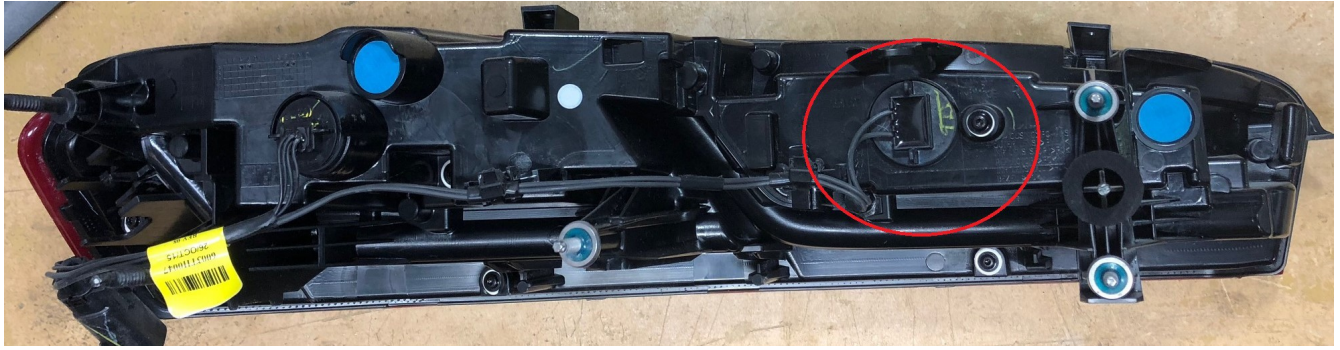





Step 4-Test for proper operation. LED bulbs are polarity sensitive, if one or both bulbs does not operate when you test please remove the LED bulb and rotate. In order to properly test the bulbs the engine must be running with the car in reverse. The reverse lights will not operate, in reverse, without the engine runni