


Foglight Harness Installation Non Switched

Step 1: Grasp relay assembly in your hand and allow all but the ring terminal wire to fall down between the core support and fuse block. Remove the 13 mm nut from the battery terminal of the fuse block and install the ring terminal wire and re install the nut. You can secure the relay to the side of the fuse block with a zip tie.




Step 2- Behind the passenger side of the bumper you will see where the bumper harness meets the body harness. Disconnect this harness and install, the Gen5DIY, harness inline.

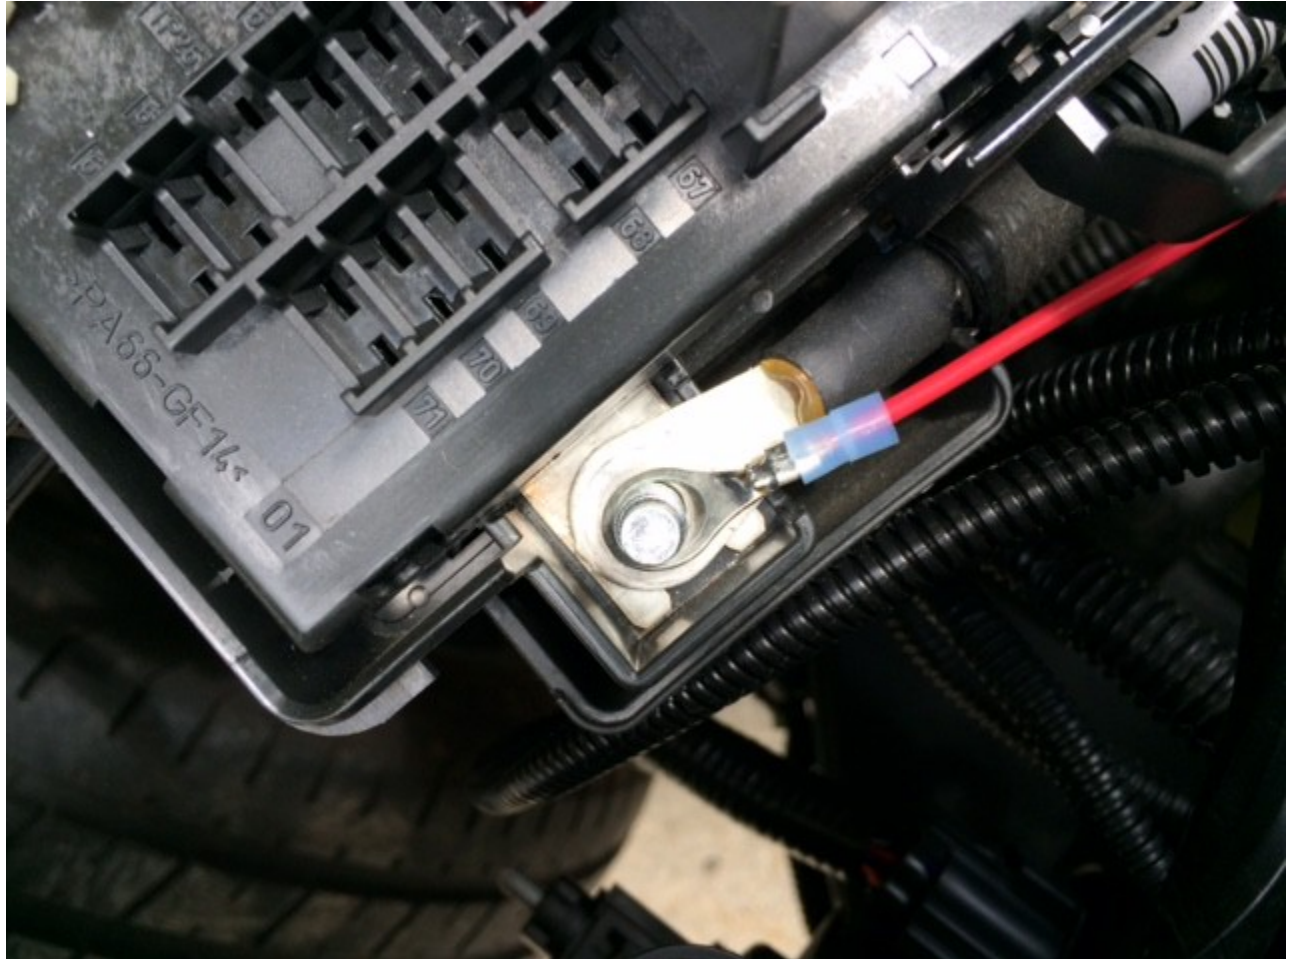



Step 3- Connect passenger side fog light harness to fog light and connect. Route driver's side of harness over and connect. Secure the harness to bottom side of radiator.

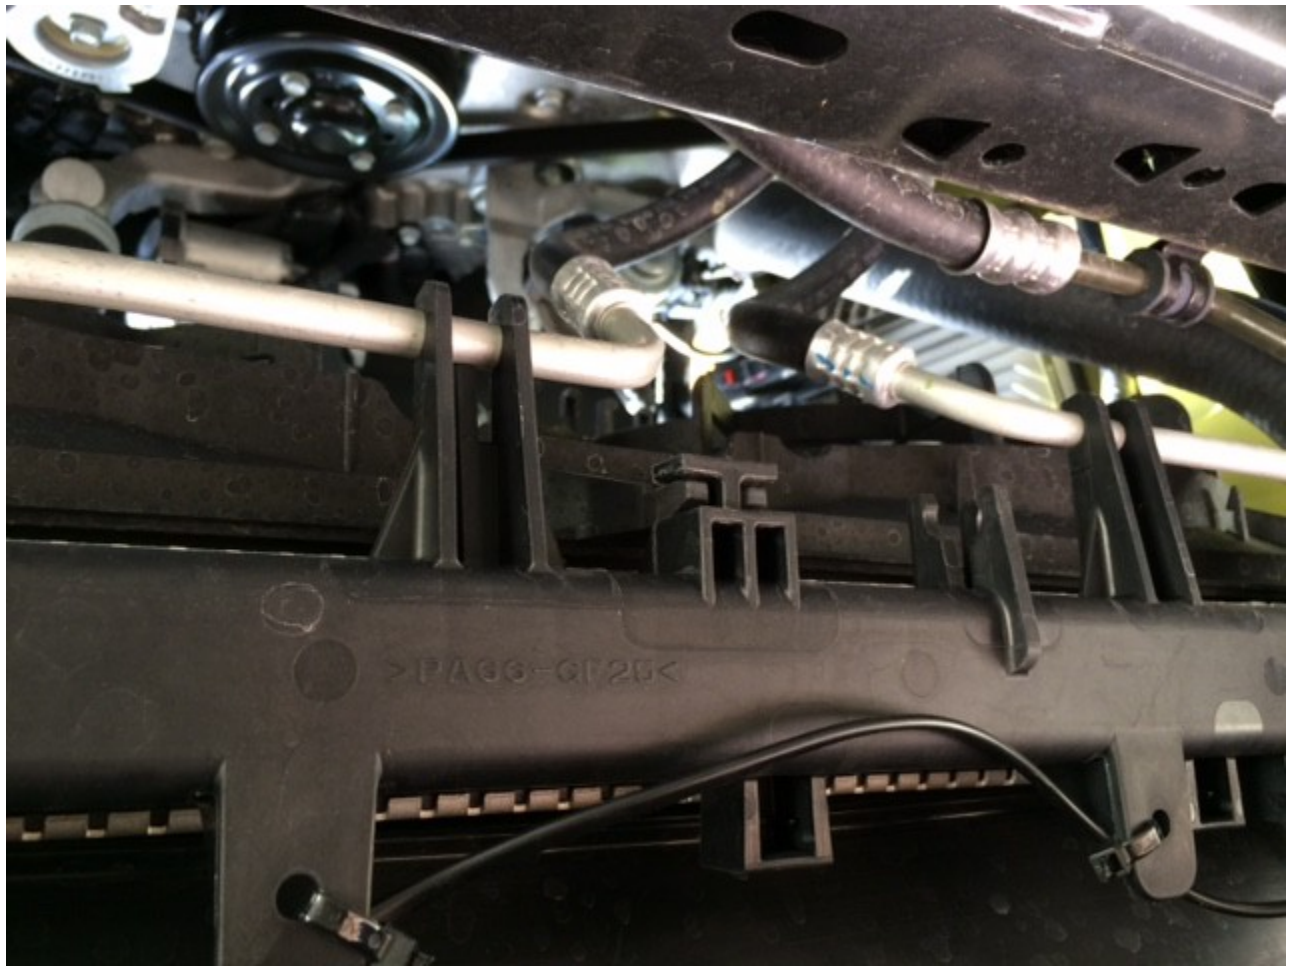

Step 4-Test. Start the engine and manually turn your headlight switch to on. Fog lights should now be on when both the headlights and your parking lights are on