










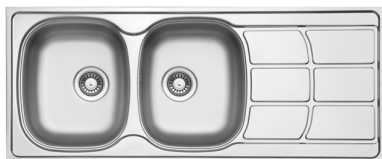




















Model	Description	Size	Available Quantity	Selling Price EXW Istanbul (USD)	
CML 580.435.W	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 435 mm	148	20.1	
CMM 580.435.W	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 435 mm	55	17.9	
CMM 1160.500.20.W	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	1160 mm x 500 mm	160	33.5	
CMM 760.435.	Thickness: 0.5 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	760 mm x 435 mm	563	14.7	
CMM 760.435.	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	760 mm x 435 mm	75	14.7	
CMM 760.435.W	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	760 mm x 435 mm	90	14.7	

CMM 860.435.W	Thickness: 0.5 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	860 mm x 435 mm	112	16.3	
CMM 860.435.W	Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	860 mm x 435 mm	80	17.9	
CLL 780.480.20.	Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	780 mm x 480 mm	296	34.7	
CLL 790.500.20.	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	790 mm x 500 mm	77	34.7	
CLL 790.500.20.	Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	790 mm x 500 mm	174	39.3	
CLP 1160.500.20.	Finishing: Polished Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	1160 mm x 500 mm	60	38.5	
COL 503.503.	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	503 mm x 503 mm	102	18.7	

COL 580.488.	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	635	20.1	
COL 580.488.	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	44	24.6	
COM 580.488.W	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	217	17.9	
COL 580.488.W	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	86	20.1	
COL 580.488.W	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	29	24.6	
COP 580.488.W	Thickness: 0.7 mm Finishing: Polished Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	580 mm x 488 mm	51	22.0	

COL 780.480.15.	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	780 mm x 480 mm	38	38.8	
COL 780.480.18.	Thickness: 0.8 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	780 mm x 480 mm	57	38.3	
COL 780.480.18.	Thickness: 0.8 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	780 mm x 480 mm	556	42.9	
COP 972.492.15.	Thickness: 0.8 mm Finishing: Polished Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	972 mm x 492 mm	317	34.2	
COP 972.492.15.	Thickness: 0.8 mm Finishing: Polished Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	972 mm x 492 mm	177	37.2	
COL 972.492.15.	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	972 mm x 492 mm	102	38.4	

COL 972.492.15.W	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	972 mm x 492 mm	10	38.4	
ELL 780.500.	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	780 mm x 500 mm	173	30.7	
FAL 577.447.W	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	577 mm x 447 mm	158	21.5	
FAM 577.447.W	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	577 mm x 447 mm	221	15.5	
FAL 745.445.W	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	745 mm x 445 mm	216	26.0	
FAL 745.445.W	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	745 mm x 445 mm	272	21.4	

FAM 745.445.W	Thickness: 0.6 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	745 mm x 445 mm	70	19.2	
FAL 747.447.	Thickness: 0.6 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	747 mm x 447 mm	188	21.4	
FAL 747.447.	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	747 mm x 447 mm	653	25.9	
FAM 747.447.	Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	747 mm x 447 mm	609	19.2	
FAM 747.447.	Thickness: 0.5 mm Finishing: Satin Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	747 mm x 447 mm	7	17.5	
FAL 747.447.W	Thickness: 0.7 mm Finishing: Linen Installation type: Inset Used only 304 steel. Easy to clean. Sprayed with a non-toxic undercoating.	747 mm x 447 mm	191	25.9	