

INSTRUCTION MANUAL



BluJax - ISBT32 Rev B

NOTE: Make sure you are parked in a safe spot before installation and whenever you are pairing your device. NEVER WHILE DRIVING.

1. Charge

- Charge your BluJax using the USB charging cable included.
- When connected to a USB power source, BT icon will glow red while charging. When charging is complete, red LED light will turn off.

2. Initial Pairing

- After charging your BluJax, unplug it from the USB cable.
- Enable your Bluetooth function on your smart device.
- Turn on BluJax by pushing and holding the Bluetooth button for 3 seconds. BT icon will be blinking red and blue. Power is on.
- Open the Bluetooth menu on your smartphone, and scan for available Bluetooth accessories.
- Choose "ISBT32R" from the list, and select "Connect".
- When a successful connection has been established, LED light will change to a solid blue light.

TO PAIR ADDITIONAL DEVICES: Turn off Bluetooth on your first device and repeat steps b-f. **NOTE:** You can store up to 5 devices in the BluJax memory, but BluJax can only play two devices in tandem at the same time.

3. Let's go! Connect!

- Plug BluJax into the vehicle's AUX port.
- Select the AUX input source on your radio to enjoy your music.
- Use your phone to access your music.

4. Day to Day Operation

- Press "**PLAY**" button to play
- Press "**PAUSE**" button to pause
- Press "**FORWARD**" button to skip track
- Press "**BACK**" button to go back to beginning of track
- Double click to go back to previous track

Turning Off Your BluJax

To save battery life while not in use, press the control button for 3 seconds to turn off BluJax.

LED Indicator Guide

- Pairing mode: Flashing red and blue lights
- Paired: Steady blue light
- Low Battery: Flashing red light
- Charging: Steady red light
- Full battery: No light

Here is what you get

Control Button



BluJax



3.5mm Extension Cable




USB Charging Cable



Charge



Power

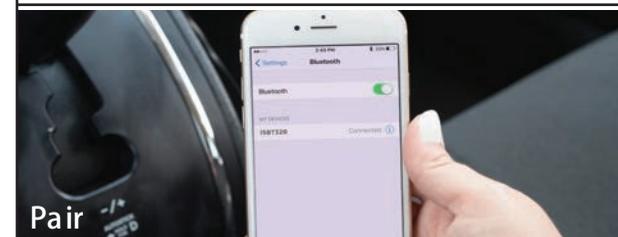

Pair



Plug into AUX



Push to Play

Power save mode

If your smartphone is out of range for 5 minutes, BluJax will automatically turn off to preserve the battery power. When returning to the vehicle, press the control button once to wake BluJax up.

Battery Low

You can expect about 8 hours of playback from BluJax on a single charge. When BluJax is low, it will flash red, and say "Battery low, please charge."

For Pairing Multiple Devices (BluJax can store up to 5 paired smartphones in its memory)

- a. To pair an additional device, disconnect from the currently paired device by going into your smartphone's Bluetooth settings and clicking "Disconnect."
- b. BluJax can connect to 2 phones at the same time.
- c. If you have more than 5 devices, the oldest paired device will be erased when you pair with a new smartphone.
- d. Follow initial pairing instructions.

In Case of Tight Quarters

The 3.5mm jack on BluJax has been intentionally designed to be off-center so that it can be rotated to allow it to clear buttons or other obstructions located near your AUX input. If rotating BluJax is not allowing full insertion into the AUX input, we have provided a short extension cable which can be used to make the connection. Connect the extension cable between BluJax and the AUX input.

WARNING:

This equipment may be reset by unintentional electrostatic discharge during operation. Exposure to direct sunlight or extreme heat may cause damage or malfunction.

FCC Class B Radio Frequency Interference Statement This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Re-orientate or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that of which the receiver is connected.
4. Consult the dealer or an experienced radio / television technical for help.

Notice : The changes or modifications not expressly approved by the party responsible compliance could void the user authority to operate the equipment.

FCC ID:XBD-ISBT32RB

Tech Support:
support@isimplesolutions.com
866-788-4237