

# MINI MITO Open Fitting Models

This is the best solution for a customer who wants great performance and little dimensions, it's a battery 312 mini BTE. It supports an openfitting system or a bte system. It can be done in plus version with double receiver.



	Mini Mito Basic	Mini Mito 8W2	Mini Mito 8W4	Mini Mito 16W6	Mini Mito 16W8
WDRC Channels	1	2	4	6	8
Battery Type	312	312	312	312	312
Program Selector	•	•	•	•	•
Volume Control	-	-	-	-	-
i-Scene	-	-	-	•	•
Noise Reduction	-	-	-	•	•
Programmable Memory	2	4	4	6	6
Data Logging	-	-	-	•	•
Auto Fitting	•	•	•	•	•
Tinnitus Treatment	-	•	•	•	•
Feedback Cancellor	•	•	•	•	•
Telecoil	-	-	-	-	-
Acoustic Indicators	•	•	•	•	•
Battery Life [hours]*	260	260	260	250	250

## Performance

OSPL 90 [Peak dB SPL]	127	127	127	127	127
Full-On Gain [dB]	44	44	44	44	44
Harmonic Distortion	<3%	<3%	<3%	<3%	<3%
Battery Consumption [mA/h]*	0.65	0.65	0.65	0.7	0.7

- Unvaivable

• Available

\* Battery consumption was estimated according to the IEC 60118-7 a 1000Hz @ 65dB  
Data were obtained from tests conducted in accordance with the IEC 60118-7

## Accessories:

- Open Fitting System
- Ear Dome: OPEN, CLOSED


## Accessories for Programming:

- Programming Cable (Hi-Pro)

## Software:

Horentek Fitting

## Standard Colours

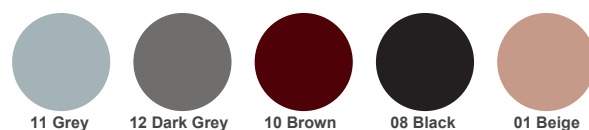

For more Technical Information visit [www.horentekpro.com](http://www.horentekpro.com)